

FINAL

**Total Maximum Daily Load of Sediment
in the Marsh Run Watershed,
Washington County, Maryland**



DEPARTMENT OF THE ENVIRONMENT
1800 Montgomery Boulevard, Suite 540
Baltimore, Maryland 21230-1718

Submitted to:

Water Protection Division
U.S. Environmental Protection Agency, Region III
1650 Arch Street
Philadelphia, PA 19103-2029

August 2019

USEPA Submittal Date: August 6, 2019
USEPA Approval Date: September 12, 2019

Table of Contents

List of Figures..... i
List of Tables i
List of Abbreviations ii
EXECUTIVE SUMMARY iv
1.0 INTRODUCTION..... 1
2.0 SETTING AND WATER QUALITY DESCRIPTION..... 3
 2.1 General Setting..... 3
 2.1.1 Land-use..... 6
 2.2 Source Assessment..... 9
 2.2.1 Nonpoint Source Assessment 9
 2.2.2 Point Source Assessment..... 11
 2.2.3 Summary of Baseline Loads..... 12
 2.3 Water Quality Characterization 13
 2.4 Water Quality Impairment 16
3.0 TARGETED WATER QUALITY GOAL..... 18
4.0 TOTAL MAXIMUM DAILY LOADS AND SOURCE ALLOCATION..... 20
 4.1 Overview..... 20
 4.2 Analysis Framework 20
 4.3 Scenario Descriptions and Results..... 22
 4.4 Critical Condition and Seasonality 23
 4.5 TMDL Loading Caps 24
 4.6 Load Allocations Between Nonpoint and Point Sources 25
 4.7 Margin of Safety 27
 4.8 Summary of Total Maximum Daily Loads 28
5.0 ASSURANCE OF IMPLEMENTATION 29
REFERENCES..... 34
APPENDIX A – Watershed Characterization Data A1
APPENDIX B – Technical Approach Used to Generate Maximum Daily Loads.....B1

List of Figures

Figure 1: Location Map of the Marsh Run Watershed in Washington County, Maryland 5
Figure 2: Land-use of the Marsh Run Watershed 8
Figure 3: Monitoring Stations in the Marsh Run Watershed 15
Figure 4: Designated Use Classes of the Marsh Run Watershed in Washington County,
Maryland 17
Figure B-1: Daily Time Series of CBP River Segment Daily Simulation Results for the
Marsh Run Watershed.....B5

List of Tables

Table ES-1: Marsh Run 2018 Integrated Report Listings iv
Table ES-2: Marsh Run Watershed Baseline Sediment Loads (ton/yr) vii
Table ES-3: Marsh Run Watershed Average Annual TMDL..... vii
of Sediment (ton/yr)..... vii
Table ES-4: Marsh Run Watershed Baseline Load, TMDL, and Total Reduction
Percentage vii
Table 1: Marsh Run Integrated Report Listings 2
Table 2: Land-Use Percentage Distribution for the Marsh Run Watershed 7
Table 3: Washington County Target EOF TSS Loading Rates (ton/acre/yr)
by Land-Use..... 10
Table 4: Marsh Run Watershed Baseline Sediment Loads (ton/yr) 12
Table 5: Detailed Baseline Sediment Loads Within the Marsh Run Watershed 12
Table 6: Monitoring Stations in the Marsh Run Watershed 14
Table 7: Marsh Run Watershed Baseline Load and TMDL 25
Table 8: Marsh Run Watershed TMDL Reductions by Source Category 27
Table 9: Marsh Run Watershed Average Annual TMDL of TSS (ton/yr) 28
Table 10: Marsh Run Watershed Maximum Daily Load of TSS (ton/day)..... 28
Table A-1: Reference Watersheds in the Coastal Plain Physiographic Region..... A1
Table B-1: Marsh Run Watershed Maximum Daily Loads of
Sediment/TSS (ton/day).....B6

List of Abbreviations

AFO	Animal Feeding Operations
ANC	Acid Neutralizing Capacity
BIBI	Benthic Index of Biotic Integrity
BIP	Buffer Incentive Program
BMP	Best Management Practices
BSID	Biological Stressor Identification
CAFOs	Concentrated Animal Feeding Operations
CBLCD	Chesapeake Bay Land-Cover Dataset
CBP	Chesapeake Bay Program
CBP P4.3	Chesapeake Bay Program Model Phase 4.3
CBP P5.3.2	Chesapeake Bay Program Model Phase 5.3.2
CBT	Chesapeake Bay Trust
CCAP	Coastal Change Analysis Program
CFR	Code of Federal Regulations
cfs	Cubic Feet per Second
CHSTF	Marsh Run Tidal Fresh
COMAR	Code of Maryland Regulations
CV	Coefficient of Variation
CWA	Clean Water Act
DI	Diversity Index
EOF	Edge-of-Field
EOS	Edge-of-Stream
EPT	<i>Ephemeroptera, Plecoptera, and Trichoptera</i>
ESD	Environmental Site Design
FIBI	Fish Index of Biologic Integrity
GIS	Geographic Information System
HBI	Hilsenhoff Biotic Index
HSPF	Hydrological Simulation Program Fortran
IBI	Index of Biotic Integrity
LA	Load Allocation
m	Meter
m ³ /yr	Meters cubed per year
MACS	Maryland Agricultural Water Quality Cost-Share Program
MAL	Minimum Allowable IBI Limit
MBSS	Maryland Biological Stream Survey
MDA	Maryland Department of Agriculture
MDDNR	Maryland Department of Natural Resources
MDE	Maryland Department of the Environment
MDL	Maximum Daily Load
MDP	Maryland Department of Planning
MGD	Millions of Gallons per Day
mg/l	Milligrams per liter
MGS	Maryland Geological Survey

FINAL

MOS	Margin of Safety
MRLC	Multi-Resolution Land Characteristics
MS4	Municipal Separate Storm Sewer System
NLCD	National Land-Cover Dataset
NOAA	National Oceanic and Atmospheric Administration
NPDES	National Pollutant Discharge Elimination System
NPS	Nonpoint Source
NRCS	Natural Resource Conservation Service
NRI	Natural Resources Inventory
PS	Point Source
PSU	Primary Sampling Unit
SCS	Soil Conservation Service
SDF	Sediment Delivery Factor
SHA	State Highway Administration
TMDL	Total Maximum Daily Load
ton/acre/yr	Tons per acre per year
ton/day	Tons per day
ton/yr	Tons per year
TSD	Technical Support Document
TSS	Total Suspended Solids
USDA	United States Department of Agriculture
USEPA	U.S. Environmental Protection Agency
USGS	United States Geological Survey
WIP	Watershed Implementation Plan
WLA	Waste Load Allocation
WQA	Water Quality Analysis
WQLS	Water Quality Limited Segment

FINAL

EXECUTIVE SUMMARY

Section 303(d) of the federal Clean Water Act (CWA) and the U.S. Environmental Protection Agency's (USEPA) implementing regulations direct each state to identify and list waters, known as water quality limited segments (WQLSs), in which current required controls of a specified substance are inadequate to achieve water quality standards. For each WQLS, the State is required to either establish a TMDL of the specified substance that the waterbody can receive without violating water quality standards, or demonstrate that water quality standards are being met (CFR 2012b). This document, upon approval by USEPA, establishes a Total Maximum Daily Load (TMDL) for sediment/total suspended solids (TSS) in the Maryland 8-Digit Marsh Run watershed (2018 *Integrated Report of Surface Water Quality in Maryland* Assessment Unit ID: MD-02140503). In this TMDL report, the terms total suspended solids (TSS) and sediment may be used interchangeably.

The Maryland Department of the Environment (MDE) identified the waters of the Marsh Run watershed on the State's 2018 Integrated Report as impaired by multiple pollutants (MDE 2018). Table ES-1 identifies Integrated Report listings associated with this watershed. A data solicitation for sediment was conducted by MDE in May 2018, and all readily available data has been considered.

Table ES-1: Marsh Run 2018 Integrated Report Listings

Watershed	Basin Code	Tidal/Non-tidal	Designated Use Class	Year Listed	Identified Pollutant	Listing Category
Marsh Run	02140503	Non-tidal	I - Aquatic Life and Wildlife	2016	TSS	5
					Sulfates	

Note:

- Category 5 indicates that the waterbody is impaired and a TMDL or water quality analysis (WQA) is needed.

The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the Marsh Run watershed's tributary, Saint James Run (mainstem only), is Use Class IV-P – *recreational trout waters and public water supply*. Marsh Run and all other tributaries are designated as Use Class I-P – *water contact recreation, protection of aquatic life, and public water supply*. (COMAR 2018a, b, c).

The Marsh Run watershed was originally listed for biological impairment on the 2004 Integrated Report. The listing was based on the biological assessment methodology, which uses aquatic health scores, consisting of the Benthic Index of Biotic Integrity (BIBI) and Fish Index of Biotic Integrity (FIBI). These indices indicated that the biological metrics for the watershed exhibit a significant negative deviation from reference conditions (MDE 2004).

FINAL

In order to determine what stressor or stressors are impacting aquatic life, MDE's *Biological Stressor Identification* (BSID) methodology was applied. The BSID analysis for the Marsh Run watershed identified sediment and inorganic chemistry parameters. The sediment parameter group shows a significant association with high embeddedness and marginal to poor and poor epifaunal substrate. The inorganic chemistry parameter group shows a significant association with high conductivity and sulfates. Further details of this analysis are presented in the 2015 document entitled, *Watershed Report for Biological Impairment of the Marsh Run Watershed in Washington County, Maryland Biological Stressor Identification Analysis Results and Interpretation* (MDE 2015).

As a result of the BSID analysis, the MD 8-digit Marsh Run watershed was first listed on the 2016 Integrated Report as impaired by TSS thus requiring a TMDL.

The objective of this TMDL is to ensure that watershed sediment loads are at a level that supports the Use Class I-P/IV-P designations for the Marsh Run watershed. The TMDL will address impacts to aquatic life in the Marsh Run watershed caused by high sediment and TSS concentrations.

The CWA requires TMDLs to be protective of all the designated uses applicable to a particular waterbody. The primary focus of this TMDL is the designated use of protection of aquatic life because the Integrated Report listing was based on a biological assessment of the watershed. The biological assessment revealed the current levels of TSS and other pollutants prevent the watershed from achieving its designated use of supporting aquatic life. The required reductions within the TMDL are expected to protect all designated uses of the watershed from sediment impacts, including water contact recreation. Aquatic life is more sensitive to sediment impacts than recreation because of continuous exposure that can affect respiration and propagation. Recreation, on the other hand, is sporadic and sediment is unlikely to pose a human health risk due to dermal contact or minimal ingestion that would occur during recreation. Additionally, USEPA's *Framework for Developing Suspended and Bedded Sediments (SABS) Water Quality Criteria* states:

... where multiple designated uses (such as aquatic life and irrigation) overlap in a waterbody or on a specific segment or portion of the waterbody, SABS criteria established to protect the aquatic life use most likely will be stringent enough to protect all other uses except perhaps drinking water uses. (USEPA 2006).

This TMDL's protection of aquatic life from sediment impacts includes protection of trout and therefore support the recreational trout waters designated use. Narrative sediment criteria for recreational trout waters (Use Class IV) are the same as that for Use Class I waters. Therefore, if the TMDL is at a sediment level to support aquatic life (Use Class I), it is also meeting sediment requirements for recreational trout waters. Additionally, five of the eleven reference watersheds contain recreational trout waters (Use Class IV). Therefore, it can be inferred that setting sediment values based on these reference watersheds would be supportive of trout waters.

FINAL

Marsh Run Watershed Use Classes also include the public water supply designation (-P). Narrative sediment criteria for public water supply are the same as that for Use Class I waters. Therefore, if the TMDL is at a sediment level to support aquatic life (Use Class I), it is also meeting sediment requirements for public water supply. Additionally, ten of the eleven reference watersheds contain public water supply designations. Therefore, it can be inferred that setting sediment values based on these reference watersheds would be supportive of public water supply.

Currently in Maryland, there are no specific numeric criteria that quantify the impact of sediment on the aquatic life of stream systems. In order to quantify this impact, a reference watershed TMDL approach was used, which resulted in the establishment of a *sediment loading threshold* (MDE 2006). This threshold is based on a detailed analysis of sediment loads from watersheds that are identified as supporting aquatic life (i.e., reference watersheds) based on Maryland's biological assessment methodology (Roth et al. 1998, 2000; Stribling et al. 1998; MDE 2014a). This threshold is then used to determine a watershed specific sediment TMDL endpoint. The resulting loads are considered the maximum allowable loads the waterbody can receive without causing any sediment related impacts to aquatic health.

In order to use a reference watershed approach, sediment loads are estimated using a watershed model. For this analysis, the Chesapeake Bay Program Phase 5.3.2 (CBP P5.3.2) watershed model was chosen and specifically, the *edge-of-stream* (EOS) land-use sediment loads were used. The CBP P5.3.2 model was appropriate for this TMDL because the spatial domain of the model segmentation aggregates to the MD 8-digit watershed scale, which is consistent with the impairment listing.

USEPA's regulations require TMDLs to take into account seasonality and critical conditions for stream flow, loading, and water quality parameters (CFR 2012b). The intent of this requirement is to ensure that the water quality of the waterbody is protected during times when it is most vulnerable. The biological monitoring data used to determine the reference watersheds reflect the impacts of stressors (i.e., sediment impacts to stream biota) over the course of time (i.e., captures the impacts of both high and low flow events). Thus, critical conditions are inherently addressed. Seasonality is captured in several components. First, it is implicitly included in biological sampling as biological communities reflect the impacts of stressors over time, as described above. Second, the Maryland Biological Stream Survey (MBSS) dataset, which serves as the primary dataset for calculating the biological metrics of the watershed (i.e., BIBI and FIBI scores), included benthic sampling in the spring and fish sampling in the summer. Moreover, the sediment loading rates used in the TMDL were determined using the CBP P5.3.2 model, which is a continuous simulation model with a simulation period 1991-2000, based on Hydrological Simulation Program Fortran (HSPF) model, thereby addressing annual changes in hydrology and capturing wet, average, and dry years. It should also be noted that the biological impact of sediment generally occurs over time and therefore use of a long term modeling approach also contributes to capturing critical conditions.

FINAL

All TMDLs need to be presented as a sum of waste load allocations (WLAs) for point sources and load allocations (LAs) for nonpoint sources generated within the assessment unit, accounting for natural background, tributary and adjacent segment loads. Furthermore, all TMDLs must include a margin of safety (MOS) to account for any lack of knowledge and uncertainty concerning the relationship between loads and water quality (CFR 2012a,b). It is proposed that the estimated variability around the reference watershed group used in this analysis already accounts for such uncertainty, and therefore the MOS is implicitly included. Because the sediment loading threshold was conservatively based on the median (50th percentile) sediment loading rates from reference watersheds, Maryland has adopted an implicit MOS for sediment TMDLs.

The Marsh Run watershed total baseline sediment load is 10,817 tons per year (ton/yr). The Marsh Run watershed baseline load contribution is further subdivided into a nonpoint source baseline load (Nonpoint Source BL_{MR}) and two types of point source baseline loads: National Pollutant Discharge Elimination System (NPDES) regulated stormwater (NPDES Stormwater BL_{MR}) and NPDES regulated wastewater (Wastewater BL_{MR}) (see Table ES-2).

Table ES-2: Marsh Run Watershed Baseline Sediment Loads (ton/yr)

Total Baseline Load	=	Nonpoint Source BL_{MR}	+	NPDES Stormwater BL_{MR}	+	Wastewater BL_{MR}
10,817	=	9,473	+	1,344	+	0

The Marsh Run Watershed average annual TMDL of TSS is 7,418 ton/yr (a 31% reduction from the baseline load). The Marsh Run TMDL contribution is further subdivided into point and nonpoint source allocations and is comprised of a load allocation (L_{MR}) of 6,870 ton/yr, an NPDES Stormwater Waste Load Allocation (NPDES Stormwater WL_{MR}) of 548 ton/yr, and a Wastewater Load Allocation (Wastewater WL_{MR}) of 0 ton/yr (see Table ES-3).

Table ES-3: Marsh Run Watershed Average Annual TMDL of Sediment (ton/yr)

TMDL	=	L_{MR}	+	NPDES Stormwater WL_{MR}	+	Wastewater WL_{MR}	+	MOS
7,418	=	6,870	+	548	+	0	+	Implicit

Table ES-4: Marsh Run Watershed Baseline Load, TMDL, and Total Reduction Percentage

Baseline Load (ton/yr)	TMDL (ton/yr)	Total Reduction (%)
10,817	7,418	31

FINAL

In addition to the TMDL value, a Maximum Daily Load (MDL) is also presented in this document. The calculation of the MDL, which is derived from the TMDL average annual loads, is explained in Appendix B and presented in Table B-1.

This TMDL will ensure that watershed sediment loads are at a level to support the Use Class I-P/IV-P designation for the Marsh Run watershed, and more specifically, at a level to support aquatic life. The TMDL will not completely resolve the impairment to biological communities within the watershed since the BSID watershed analysis identifies other possible stressors impacting the biological conditions (e.g. sulfates).

Section 303(d) of the CWA and current USEPA regulations require reasonable assurance that the TMDL can and will be implemented. Once USEPA has approved this TMDL and it is known what measures must be taken to reduce pollution levels, implementation of best management practices (BMPs) is expected to take place. MDE intends for the required TMDL reductions to be implemented in an iterative process that first addresses those sources with the largest impact to water quality, with consideration given to cost of implementation.

Implementation of the Marsh Run Watershed Sediment TMDL is expected to occur in conjunction with implementation efforts to meet sediment target loads consistent with the Chesapeake Bay TMDLs. The Chesapeake Bay TMDLs were established by USEPA and are scheduled for full implementation by 2025 (USEPA 2010a). These TMDLs require reductions of nitrogen, phosphorus, and sediment loads throughout the Bay watershed to meet water quality standards that protect the designated uses in the Bay and its tidal tributaries.

While this TMDL establishes a sediment loading target for the watershed, watershed managers and other stakeholders should always remain cognizant that the endpoint of this TMDL, and hence the definition of its successful implementation, is based on in-stream biological health. Load reductions are critical to tracking this effort, since the TMDL target is defined as the point where sediment loads match those seen in reference watersheds, but the watershed cannot be delisted or classified as meeting water quality standards until it is demonstrated that the biological health of the stream system is no longer impaired by sediment. In planning any implementation efforts related to this TMDL, careful consideration should be given both to the sediment load reductions, and to their direct potential impacts on biological communities.

Many practices in the implementation plans that reduce sediment concurrently address other stressors identified in the BSID report. Since biological improvements will likely only be seen when multiple structural and pollutant stressors are addressed, watershed managers developing plans to address sediment should consider the effect of restoration projects on other stressors. Where possible, preference should be given to designs that address multiple stressors.

FINAL

1.0 INTRODUCTION

Section 303(d) of the federal Clean Water Act (CWA) and the U.S. Environmental Protection Agency's (USEPA) implementing regulations direct each state to identify and list waters, known as water quality limited segments (WQLSs), in which current required controls of a specified substance are inadequate to achieve water quality standards. For each WQLS, the State is required to either establish a TMDL of the specified substance that the waterbody can receive without violating water quality standards, or demonstrate that water quality standards are being met (CFR 2012b). This document, upon approval by the USEPA, establishes a Total Maximum Daily Load (TMDL) for sediment in the Maryland 8-Digit Marsh Run watershed (2018 Integrated *Report of Surface Water Quality in Maryland* Assessment Unit ID: MD-02140503). In this TMDL report, the terms total suspended solids (TSS) and sediment may be used interchangeably.

TMDLs are established to determine the pollutant load reductions needed to achieve and maintain water quality standards. A water quality standard is the combination of a designated use for a particular body of water and the water quality criteria designed to protect that use. Designated uses include activities such as swimming, drinking water supply, protection of aquatic life, and shellfish propagation and harvest. Water quality criteria consist of narrative statements and numeric values designed to protect the designated uses. Criteria may differ among waters with different designated uses.

The Maryland Department of the Environment (MDE) identified the waters of the Marsh Run watershed and associated assessment units on the State's 2018 Integrated Report as impaired by multiple pollutants (MDE 2018). Table 1 identifies the impairment listings associated with this watershed.

A data solicitation for sediment was conducted by MDE in May 2018 and all readily available data have been considered.

Table 1: Marsh Run 2018 Integrated Report Listings

Watershed	Basin Code	Tidal/Non-tidal	Designated Use Class	Year Listed	Identified Pollutant	Listing Category
Marsh Run	02140503	Non-tidal	I - Aquatic Life and Wildlife	2016	TSS	5
					Sulfates	

Note:

- Category 5 indicates that the waterbody is impaired and a TMDL or water quality analysis (WQA) is needed.

The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the Marsh Run watershed’s tributary Saint James Run (mainstem only) is Use Class IV-P – *recreational trout waters and public water supply*. Marsh Run and all other tributaries are designated as Use Class I-P – *water contact recreation, protection of aquatic life, and public water supply*. (COMAR 2016a, b, c).

The Marsh Run watershed was originally listed for biological impairment on the 2004 Integrated Report. The listing was based on the biological assessment methodology, which uses aquatic health scores, consisting of the Benthic Index of Biotic Integrity (BIBI) and Fish Index of Biotic Integrity (FIBI). These indices indicated that the biological metrics for the watershed exhibit a significant negative deviation from reference conditions (MDE 20014a).

In order to determine what stressor or stressors are impacting aquatic life, MDE’s *Biological Stressor Identification* (BSID) methodology was applied. The BSID analysis for the Marsh Run watershed identified sediment and inorganic chemistry parameters. The sediment parameter group shows a significant association with high embeddedness and marginal to poor and poor epifaunal substrate. The inorganic chemistry parameter group shows a significant association with high conductivity and sulfates. Further details of this analysis are presented in the 2015 document entitled, *Watershed Report for Biological Impairment of the Marsh Run Watershed in Washington County, Maryland Biological Stressor Identification Analysis Results and Interpretation* (MDE 2015).

The objective of this TMDL is to ensure that watershed sediment loads are at a level that supports the Use Class I-P/IV-P designations for the Marsh Run watershed. The TMDL will address water clarity problems and associated impacts to aquatic life in the Marsh Run watershed caused by high sediment and TSS concentrations.

The CWA requires TMDLs to be protective of all the designated uses applicable to a particular waterbody. The primary focus of this TMDL is the designated use of protection of aquatic life because the Integrated Report listing was based on a biological assessment of the watershed. The biological assessment revealed the current levels of TSS and other pollutants prevent the watershed from achieving its designated use of supporting aquatic life. However, the required reductions are expected to protect all designated uses of the watershed, including water contact recreation. It is understood that aquatic life is more

FINAL

sensitive to sediment impacts than recreation because aquatic life impacts result from continuous exposure than can affect respiration and propagation. Recreation, on the other hand, is sporadic and sediment is unlikely to pose a human health risk due to dermal contact or minimal ingestion that would occur during recreation. Additionally, USEPA's *Framework for Developing Suspended and Bedded Sediments (SABS) Water Quality Criteria* states:

... where multiple designated uses (such as aquatic life and irrigation) overlap in a waterbody or on a specific segment or portion of the waterbody, SABS criteria established to protect the aquatic life use most likely will be stringent enough to protect all other uses except perhaps drinking water uses. (USEPA 2006).

This TMDL's protection of aquatic life from sediment impacts includes protection of trout and therefore support the recreational trout waters designated use. Narrative sediment criteria for recreational trout waters (Use Class IV) are the same as that for Use Class I waters. Therefore, if the TMDL is at a sediment level to support aquatic life (Use Class I), it is also meeting sediment requirements for recreational trout waters. Additionally, five of the eleven reference watersheds contain recreational trout waters (Use Class IV). Therefore, it can be inferred that setting sediment values based on these reference watersheds would be supportive of trout waters.

Marsh Run Watershed Use Classes also include the public water supply designation (-P). Narrative sediment criteria for public water supply are the same as that for Use Class I waters. Therefore, if the TMDL is at a sediment level to support aquatic life (Use Class I), it is also meeting sediment requirements for public water supply. Additionally, ten of the eleven reference watersheds contain public water supply designations. Therefore, it can be inferred that setting sediment values based on these reference watersheds would be supportive of public water supply.

2.0 SETTING AND WATER QUALITY DESCRIPTION

2.1 General Setting

Location

The Marsh Run watershed is located entirely within Washington County, Maryland. Washington County is bordered by Pennsylvania to the north and by the far shore of the Potomac River, Virginia, and West Virginia to the south. It extends eastward to South Mountain and Frederick County and westward to Sideling Hill Creek and Allegany County (NRCS 2003). Hagerstown, the county seat, is a few miles north of the Marsh Run watershed, and is 70 miles from Washington, DC, 72 miles from Baltimore, Maryland, 156 miles from Pittsburgh, Pennsylvania, and 176 miles from Richmond, Virginia. It ranges in elevation from about 300 feet near the Potomac River to about 700 feet at the Pennsylvania line (NRCS 2003). The total drainage area of the Maryland 8-digit watershed is approximately 13,430 acres, and includes only one major tributary (Saint James Run) to Marsh Run. The watershed is located in the Highland region, one of three distinct eco-regions identified in the Maryland Department of Natural Resources Maryland Biological Stream

FINAL

Survey (MDDNR MBSS) Index of Biological Integrity (IBI) metrics (Southerland et al. 2005). A location map of the Marsh Run watershed is provided in Figure 1.

According to the Chesapeake Bay Program's Phase 5.3.2 watershed model, the total drainage area of the Maryland 8-digit watershed is approximately 13,430 acres, not including water/wetlands. Approximately 30 acres of the watershed area is covered by water. The total population in the Marsh Run watershed is approximately 10,900 (US Census Bureau 2010).

There are no "high quality," or Tier II, stream segments located within the Marsh Run watershed. Tier II segments are designated using MBSS data, and both the FIBI and BIBI values must be greater than 4.00 (on a scale of 1 – 5). Tier II segments require the implementation of Maryland's anti-degradation policy, which is designed to prevent degradation of high quality waters. The policy requires a review of all permitted activities upstream of Tier II stream segments. (COMAR 2016d; MDE 2011).

Geology/Soils

The Marsh Run watershed lies within the Highland physiographic region. There are two soil series in the watershed, Lindside and Waynesboro, with Lindside being dominant. The Lindside series lies at the southeast portion of the watershed. The Lindside series consists of very deep, moderately well drained soils. Permeability is moderate in upland regions. The Lindside series is nearly level to gently sloping, well drained to poorly drained, very deep soils that formed in marl, limestone, sandstone, shale, greenstone, quartzite, and phyllite. They are on active flood plains within the central limestone valley of Washington County. Slopes range from 0 to 3 percent. The Waynesboro series consists of very deep, well drained, moderately permeable soils that formed in old alluvium or unconsolidated material of sandstone, shale, and limestone origin. Slopes range from 2 to 30 percent. Soil erosion from both water and wind is a common concern. As hedgerows and wood lots are removed, buffers against wind and water are greatly reduced (NRCS 2003). [U.S. Department of Agriculture (USDA) 2006]

The United States Department of Agriculture (USDA) Natural Resources Conservation Service (NRCS) classifies soils into 4 hydrologic soil groups: Group A soils have high infiltration rates and are typically deep well drained/excessively drained sands or gravels; Group B soils have moderate infiltration rates and consist of soils that are moderately deep to deep and moderately well to well drained soils, with moderately fine/coarse textures; Group C soils have slow infiltration rates with a layer that impedes downward water movement, and they primarily have moderately fine-to-fine textures; Group D soils have very slow infiltration rates consisting of clay soils with a permanently high water table that are often shallow over nearly impervious material. The Marsh Run watershed is comprised primarily of Group B soils (82%) and Group C soils (10%), with small portions of the watershed consisting of Group A soils (1%) and Group D soils (7%) (USDA 2006).

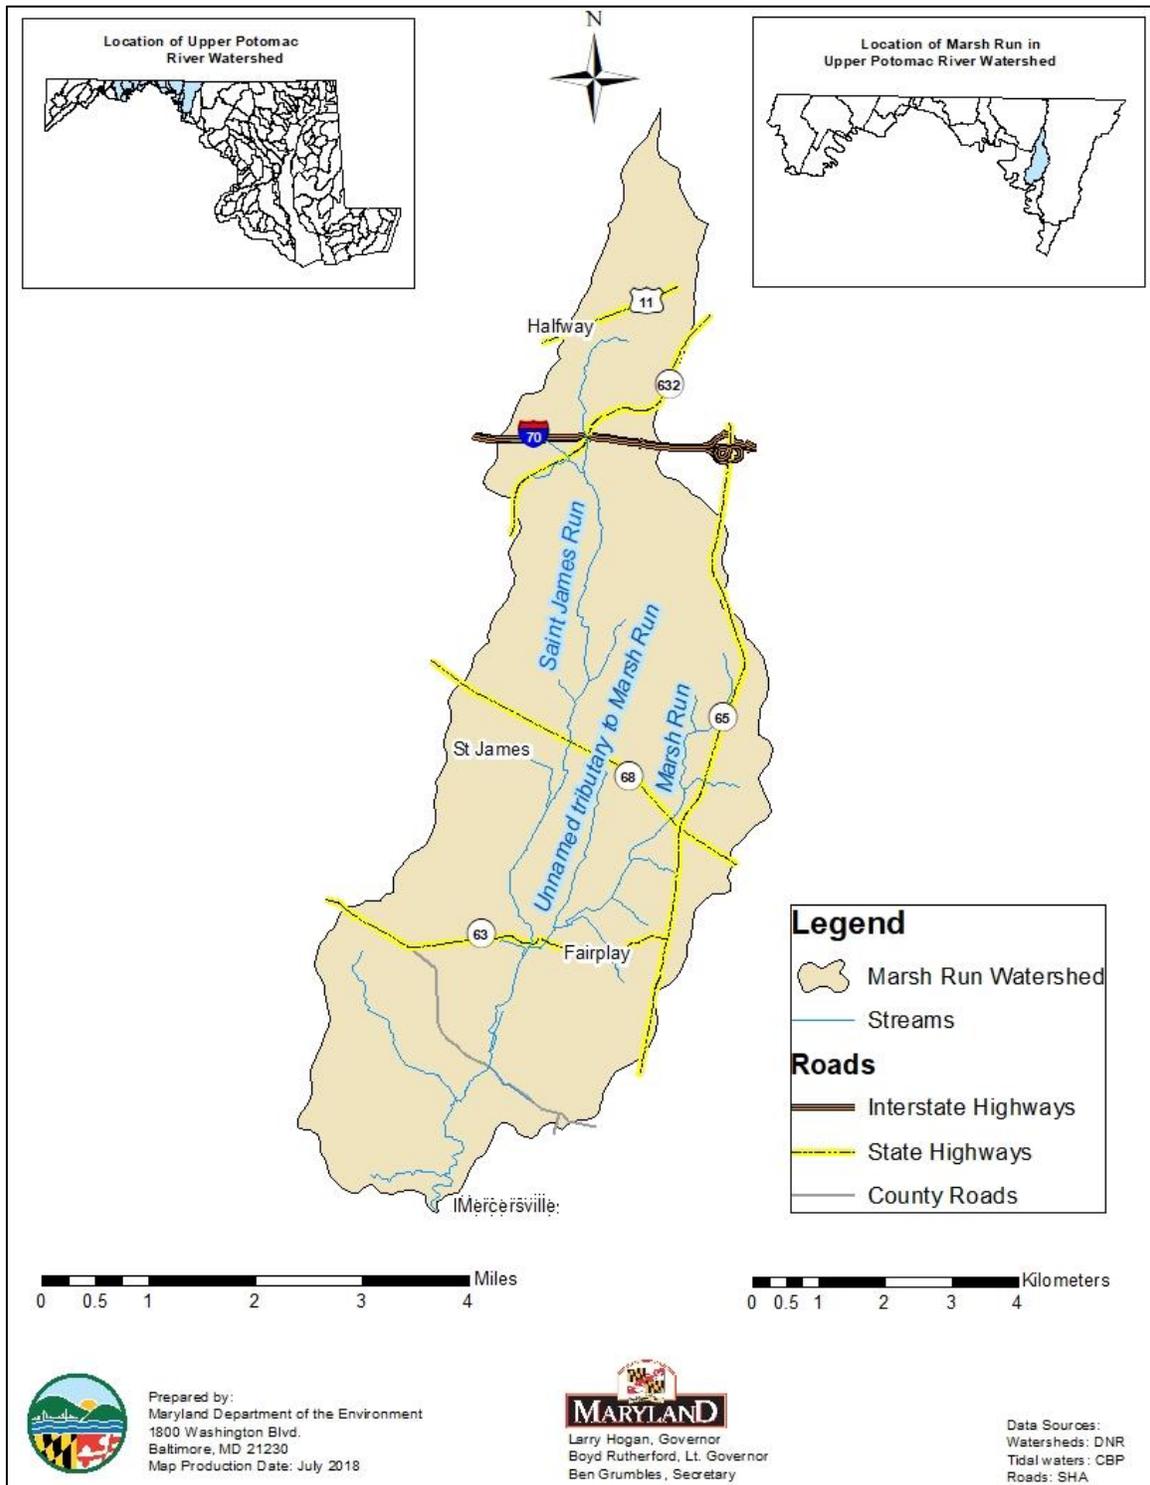


Figure 1: Location Map of the Marsh Run Watershed in Washington County, Maryland

FINAL

2.1.1 Land-use

Land-use Methodology

The land-use framework used to develop this TMDL was originally developed for the Chesapeake Bay Program Phase 5.3.2 (CBP P5.3.2) Watershed Model. The CBP P5.3.2 land-use was based on two distinct stages of development.

The first stage consisted of the development of the Chesapeake Bay Watershed Land-Cover Data (CBLCD) series of Geographic Information System (GIS) datasets. These datasets provide a 30-meter resolution raster representation of land-cover in the Chesapeake Bay watershed, based on sixteen Anderson Level two land-cover classes. The CBLCD basemap, representing 2001 conditions, was primarily derived from the Multi-Resolution Land Characteristics (MRLC) Consortium's National Land-Cover Data (NLCD) and the National Oceanic and Atmospheric Administration's (NOAA) Coastal Change Analysis Program's (CCAP) Land-Cover Data. By applying Cross Correlation Analysis to Landsat 5 Thematic Mapper and Landsat 7 Enhanced Thematic Mapper satellite imagery, CBLCD datasets for 1984, 1992, and 2006 from the baseline 2001 dataset. The watershed model documentation, *Chesapeake Bay Phase 5.3 Community Watershed Model* (USEPA 2010b), describes the development of the CBLCD series in more detail. USGS and NOAA also developed an impervious cover dataset from Landsat satellite imagery for the CBLCD basemap, which was used to estimate the percent impervious cover associated with CBLCD developed land-cover classifications.

The second stage consisted of using ancillary information for: 1) the creation of a modified 2006 CBLCD raster dataset, and 2) the subsequent development of the CBP P5.3.2 land-use framework in tabular format. Estimates of the urban footprint in the 2006 CBLCD were extensively modified using supplemental datasets. Navteq street data (secondary and primary roads) and institutional delineations were overlaid with the 2006 CBLCD land-cover and used to reclassify underlying pixels. Certain areas adjacent to the secondary road network were also reclassified based on assumptions developed by USGS researchers, in order to capture residential development (*i.e.*, subdivisions not being picked up by the satellite in the CBLCD). In addition to spatially modifying the 2006 CBLCD, the following datasets were used to supplement the developed land cover data in the final CBP P5.3.2 land-use framework: US Census housing unit data, Maryland Department of Planning (MDP) Property View data, and estimates of impervious coefficients for rural residential properties (determined via a sampling of these properties using aerial photography). This additional information was used to estimate the extent of impervious area in roadways and residential lots. Acres of construction and extractive land-uses were determined independently using a method developed by USGS (Claggett, Irani, and Thompson 2012). Finally, in order to develop accurate agricultural land-use

FINAL

acreages, the CBP P5.3.2 incorporated county level US Agricultural Census data (USDA 1982, 1987, 1992, 1997, 2002). The watershed model documentation, *Chesapeake Bay Phase 5.3 Community Watershed Model* (USEPA 2010b), describes these modifications in more detail.

The result of these modifications is that CBP P5.3.2 land-use does not exist in a single GIS coverage; instead, it is only available in a tabular format. The CBP P5.3.2 watershed model is comprised of 30 land-uses. The land-uses are divided into 13 classes with distinct sediment erosion rates. Table 2 lists the CBP P5.3.2 generalized land-uses, detailed land-uses, which are classified by their sediment erosion rates, and the acres of each land-use in the Marsh Run watershed. The land-use acreage used to inform this TMDL is based on the CBP P5.3.2 2009 Progress Scenario.

Marsh Run Watershed Land-Use Distribution

The land-use distribution of the Marsh Run watershed consists primarily of agricultural (40%), forest (21%), and urban lands (27.5%). A detailed summary of the watershed land-use areas is presented in Table 2, and a land-use map is provided in Figure 2.

Table 2: Land-Use Percentage Distribution for the Marsh Run Watershed

General Land Use	Detailed Land-Use	Area (Acres)	Percent (%)
Forest	Forest	2,840	21.1%
	Harvested Forest	28	0.2%
Pasture	Pasture	1,487	11.0%
Crop	Crop	5,367	39.9%
AFO/CAFO	AFO/CAFO	15	0.1%
Nursery	Nursery	3	0.0%
Unregulated urban	Unregulated urban	476	3.5%
Regulated Urban	Construction	0	0.0%
	Developed	3,214	23.9%
	Extractive	0	0.0%
Water	Water	29	0.2%
Total		13,460	100.0%

1. Unregulated urban land use is not regulated by a NPDES permit. Regulated urban land use is regulated by an NPDES permit.
2. Individual values may not add to total load due to rounding.

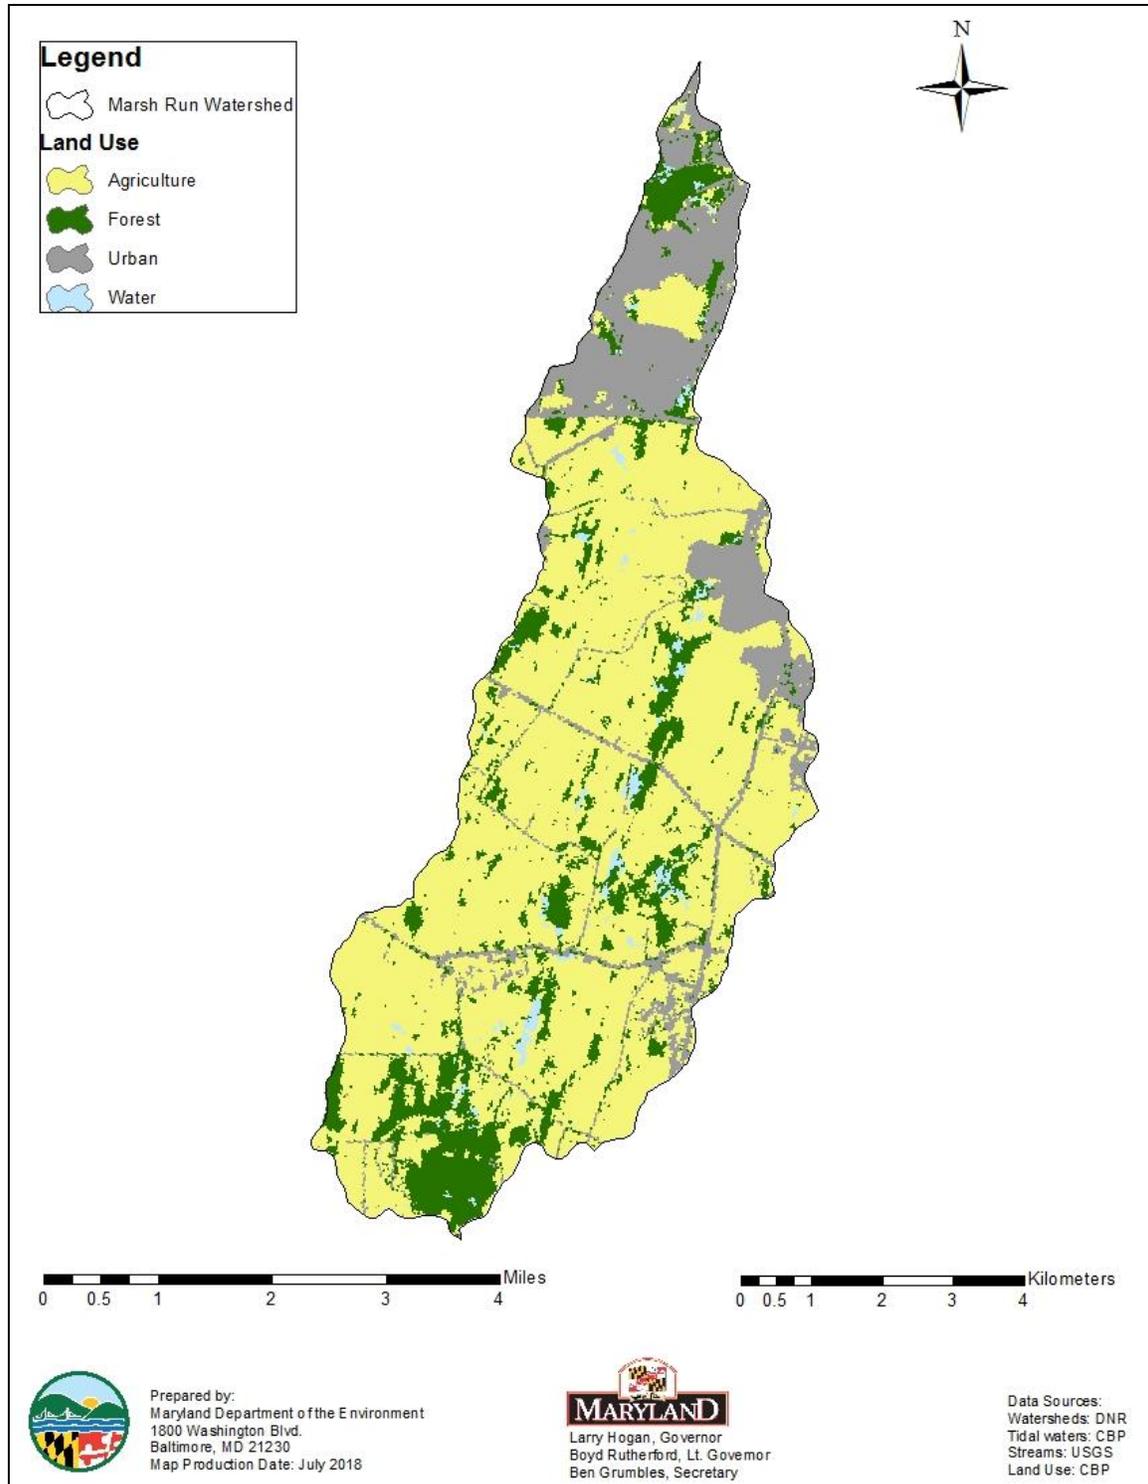


Figure 2: Land-use of the Marsh Run Watershed

2.2 Source Assessment

The Marsh Run watershed baseline load contribution consists of nonpoint sources loads and point source loads, which can be further divided into National Pollutant Discharge Elimination System (NPDES) Stormwater loads, and Wastewater loads. This section summarizes the methods used to derive each of these distinct source categories.

2.2.1 Nonpoint Source Assessment

In this document, the nonpoint source loads account for all sediment loads not covered under a NPDES permit within the Marsh Run watershed. In general, these are rainfall driven land-use based loads from agricultural and forested lands. In this watershed, unregulated urban land use is also included in the nonpoint source load. This section provides the background and methods for determining the nonpoint source baseline loads generated within the Marsh Run watershed (Nonpoint Source BLMR).

General Load Estimation Methodology

Nonpoint source sediment loads generated within the Marsh Run watershed are estimated based on the *edge-of-stream* (EOS) loads from the CBP P5.3.2 watershed model 2009 Progress Scenario. Within the CBP P5.3.2 watershed model, EOS sediment loads are calculated based on the fact that not all of the *edge-of-field* (EOF) sediment load is delivered to the stream or river (some of it is stored on fields down slope, at the foot of hillsides, or in smaller rivers or streams that are not represented in the model). To calculate the actual EOS loads, a *sediment delivery factor* (SDF) (the ratio of sediment reaching a basin outlet compared to the total erosion within the basin) is used. Details of the methods used to calculate sediment load have been documented in the report entitled *Chesapeake Bay Phase 5 Community Watershed Model* (USEPA 2010b). A summary of the methodology is presented in the following sections.

Edge-of-Field Target Erosion Rate Methodology

Edge-of-field erosion can be defined as erosion or sediment loss from any particular land surface. EOF target erosion rates are the values used in the calibration of the Chesapeake Bay Program (CBP) model, based on literature values. EOF target erosion rates for agricultural land-uses and forested land-use were based on erosion rates determined by the Natural Resource Inventory (NRI). The NRI is a statistical survey of land-use and natural resource conditions conducted by the NRCS (USDA 2006). The sampling methodology is explained by Nusser and Goebel (1997).

Estimates of average annual erosion rates for pasture and cropland are available on a county basis at five-year intervals, starting in 1982. Erosion rates for forested land-uses are not available on a county basis from the NRI; however, for the purpose of the Chesapeake Bay Program Phase 4.3 (CBP P4.3) watershed model, the NRI calculated average annual erosion rates for forested land-use on a watershed basis. These rates were used as targets in the CBP P5.3.2 model.

FINAL

The average value of the 1982 and 1987 surveys was used as the basis for EOF target rates for pasture and cropland. Rates for urban pervious, urban impervious, extractive, and barren land were based on a combination of best professional judgment, literature analysis, and regression analysis. The EOF erosion rates do not reflect best management practices (BMPs) or other soil conservation policies introduced in the wake of the effort to restore the Chesapeake Bay. To compensate for this, BMPs are applied to the modeled EOS loads in the CBP P5.3.2 2009 Progress Scenario. BMP data, representing BMPs in place in 2009, was collected by the Chesapeake Bay Program (CBP), and TSS reduction efficiencies have been estimated by CBP for specific types of BMPs based on peer reviewed studies, data collected by local jurisdictions, and an analysis of available literature values. For further details regarding EOF erosion rates, please see Section 9.2.1 of the *Chesapeake Bay Phase 5 Community Watershed Model* (USEPA 2010b). Table 3 lists EOF erosion rates specific to Washington County, where the Marsh Run watershed is located.

Table 3: Washington County Target EOF TSS Loading Rates (ton/acre/yr) by Land-Use

Land-use	Data Source	Washington County Target EOF TSS Loading rate (ton/acre/yr)
Forest	NRI (1987)	0.31
Harvested Forest	Literature values	3
Nursery	Equivalent to conventional till	6.24
Pasture	NRI average (1982-1987)	1.28
Animal Feeding Operations	NRI pasture average (1982-1987) multiplied by 9	11.52
Hay	Adjusted NRI average (1982-1987)	1.6
Conventional Till	Adjusted NRI average (1982 – 1987)	6.24
Conservation Till	Adjusted NRI average (1982 – 1987)	3.74
Pervious Urban	Regression Analysis	0.74
Extractive	Literature values/best professional judgment	10
Barren (Construction)	Literature values	23
Impervious Urban	Regression Analysis	5.18

FINAL

Edge-of-Stream Sediment Loads

EOS sediment loads are the loads that enter the modeled river reaches. Modeled river reaches are those with discharges of 100 cubic feet per second (cfs) or greater. (Exceptions were made for some river reaches that had useful monitoring data but were less than 100 cfs.) EOS sediment loads represent not only the erosion from the land but all of the intervening processes of deposition on hillsides and sediment transport through smaller rivers and streams. The influence of the sum of these processes is represented in the estimated SDF.

The formula for the EOS load calculation within the CBP P5.3.2 watershed model is as follows:

$$\sum_i^n EOS = Acres_i * EOF_i * SDF_i \quad (\text{Equation 2.1})$$

where:

n = number of land-use classifications

i = land-use classification

EOS = Edge of stream load, tons per year (ton/yr)

Acres = acreage for land-use i

EOF = Edge-of-field erosion rate for land-use i, ton/acre/yr

SDF = sediment delivery factor for land-use i

2.2.2 Point Source Assessment

A list of active permitted point sources that contribute to the sediment load in the Marsh Run watershed was compiled using best available resources. The types of permits identified were Municipal Separate Storm Sewer System (MS4) permits, general NPDES stormwater permits and the general permit for stormwater discharges from construction sites. All of these permits are stormwater permits. There are no wastewater permits that have TSS limits in the Marsh Run Watershed. The stormwater category includes all NPDES regulated stormwater discharges. The technical memorandum to this document, entitled *Point Sources of Sediment in the Marsh Run Watershed*, identifies all the wastewater permits and NPDES regulated stormwater discharges that contribute to the sediment load in the Marsh Run watershed.

The stormwater permits identified throughout the Marsh Run watershed do not include numeric TSS limits. In the absence of TSS limits, the NPDES regulated stormwater baseline load (NPDES Stormwater BL_{MR}) is calculated using the CBP P5.3.2 Progress Scenario urban land-use EOS loads (as per Equation 2.1) similar to the approach for nonpoint source (NPS) loads outlined in Section 2.1. The technical memorandum to this document entitled *Point Sources of Sediment in the Marsh Run Watershed* provides detailed information regarding the calculation of the Marsh Run watershed NPDES Stormwater BL_{MR} .

2.2.3 Summary of Baseline Loads

Table 4 summarizes the Marsh Run Baseline Sediment Load, reported in tons per year (ton/yr) and presented in terms of Nonpoint Source, NPDES Stormwater, and Wastewater Baseline Loads.

Table 4: Marsh Run Watershed Baseline Sediment Loads (ton/yr)

Total Baseline Load	=	Nonpoint Source BLMR	+	NPDES Stormwater BLMR	+	Process Water BLMR
10,817	=	9,473	+	1,344	+	0

Table 5 presents a breakdown of Marsh Run Watershed Total Baseline Sediment Load, detailing loads per land-use or other source category.

Table 5: Detailed Baseline Sediment Loads Within the Marsh Run Watershed

General Land Use	Detailed Land-Use	Tons	Percent (%)
Forest	Forest	433	4.0%
	Harvested Forest	16	0.2%
AFO/CAFO	Animal Feeding Operations	43	0.4%
Pasture	Pasture	1,178	10.9%
Crop	Crop	7,662	70.8%
Nursery	Nursery	11	0.1%
Unregulated Urban	Unregulated Urban	130	1.2%
Regulated Urban	Construction	0	0.0%
	Developed	1,344	12.4%
	Extractive	0	0.0%
Point Sources	Industrial Point Sources	0	0.0%
	Municipal Point Sources		0.0%
Total		10,817	100.0%

Note: Individual values may not add to total load due to rounding.

2.3 Water Quality Characterization

The Marsh Run watershed was originally listed for impacts to biological communities in the 2004 Integrated Report. To refine the listing for impacts to biological communities, Maryland conducted a stressor identification analysis. Details of this analysis are presented below and in the document entitled, *Watershed Report for Biological Impairment of the Marsh Run Watershed in Washington County, Maryland Biological Stressor Identification Analysis Results and Interpretation* (MDE 2015).

Currently in Maryland, there are no specific numeric criteria for suspended sediments. Therefore, to determine whether aquatic life is impacted by elevated sediment loads, MDE's BSID methodology was applied. The primary goal of the BSID analysis is to identify the most probable cause(s) for observed biological impairments throughout MD's 8-digit watersheds (MDE 2009a).

The BSID analysis applies a case-control, risk-based, weight-of-evidence approach to identify potential causes of biological impairment. The risk-based approach estimates the strength of association between various stressors and an impaired biological community. The BSID analysis then identifies individual stressors as probable or unlikely causes of the poor biological conditions within a given watershed, and subsequently reviews ecological plausibility. Finally, the analysis concludes whether or not these individual stressors or groups of stressors are contributing to the impairment (MDE 2009a).

The primary dataset for BSID analysis includes MDDNR MBSS Round 2 and Round 3 data (collected between 2000-2009) because it provides a broad spectrum of paired data variables, which allow for a more comprehensive stressor analysis. MDDNR-MBSS Round 1 can also be used if there is limited Round 2 and 3 data. The MBSS is a robust statewide probability-based sampling survey for assessing the biological conditions of 1st through 4th order, streams (Klauda et al. 1998; Roth et al. 2005). It uses a fixed length (75 meter) randomly selected stream segment for collecting site level information within a primary sampling unit (PSU), also defined as a watershed. The randomly selected stream segments, from which field data are collected, are selected using either stratified random sampling with proportional allocation, or simple random sampling (Cochran 1977). The random sample design allows for unbiased estimates of overall watershed conditions. Thus, the dataset facilitated case-control analyses because: 1) in-stream biological data are paired with chemical, physical, and land-use data variables that could be identified as possible stressors; and 2) it uses a probabilistic statewide monitoring design.

The BSID analysis combines the individual stressors (physical and chemical variables) into three generalized parameter groups in order to assess how the resulting impacts of these stressors can alter the biological community and structure. The three generalized parameter groups include: sediment, habitat, and water chemistry. Identification of a sediment stressor as contributing to the biological impairment is based on the results of the individual stressor associations within the sediment parameter grouping, which reveal the effects of sediment related impacts on stream biota (MDE 2009a).

FINAL

Marsh Run Watershed Monitoring Stations

A total of 6 water quality monitoring stations were used to characterize the Marsh Run watershed for the purpose of this TMDL. The biological assessment was based on the combined results of MBSS Round 1 and Round 2 data, which includes 6 stations. The BSID analysis used stations from MBSS Round 2, which includes 4 stations. All stations are listed in Table 6 and presented in Figure 3.

Table 6: Monitoring Stations in the Marsh Run Watershed

Site Number	Sponsor	Site Type	Location	Latitude (decimal degrees)	Longitude (decimal degrees)
WA-V-003-123-95	DNR	MBSS Round 1	Saint James Run, unnamed tributary 1	39.5514	-77.7714
WA-V-077-310-95	DNR	MBSS Round 1	Marsh Run	39.5314	-77.7661
MARS-205-R-2000	DNR	MBSS Round 2	Marsh Run	39.5267	-77.7693
MARS-210-R-2000	DNR	MBSS Round 2	Marsh Run	39.5373	-77.7630
MARS-224-R-2000	DNR	MBSS Round 2	Marsh Run	39.5150	-77.7774
MARS-211-R-2002	DNR	MBSS Round 2	Marsh Run	39.5011	-77.7800

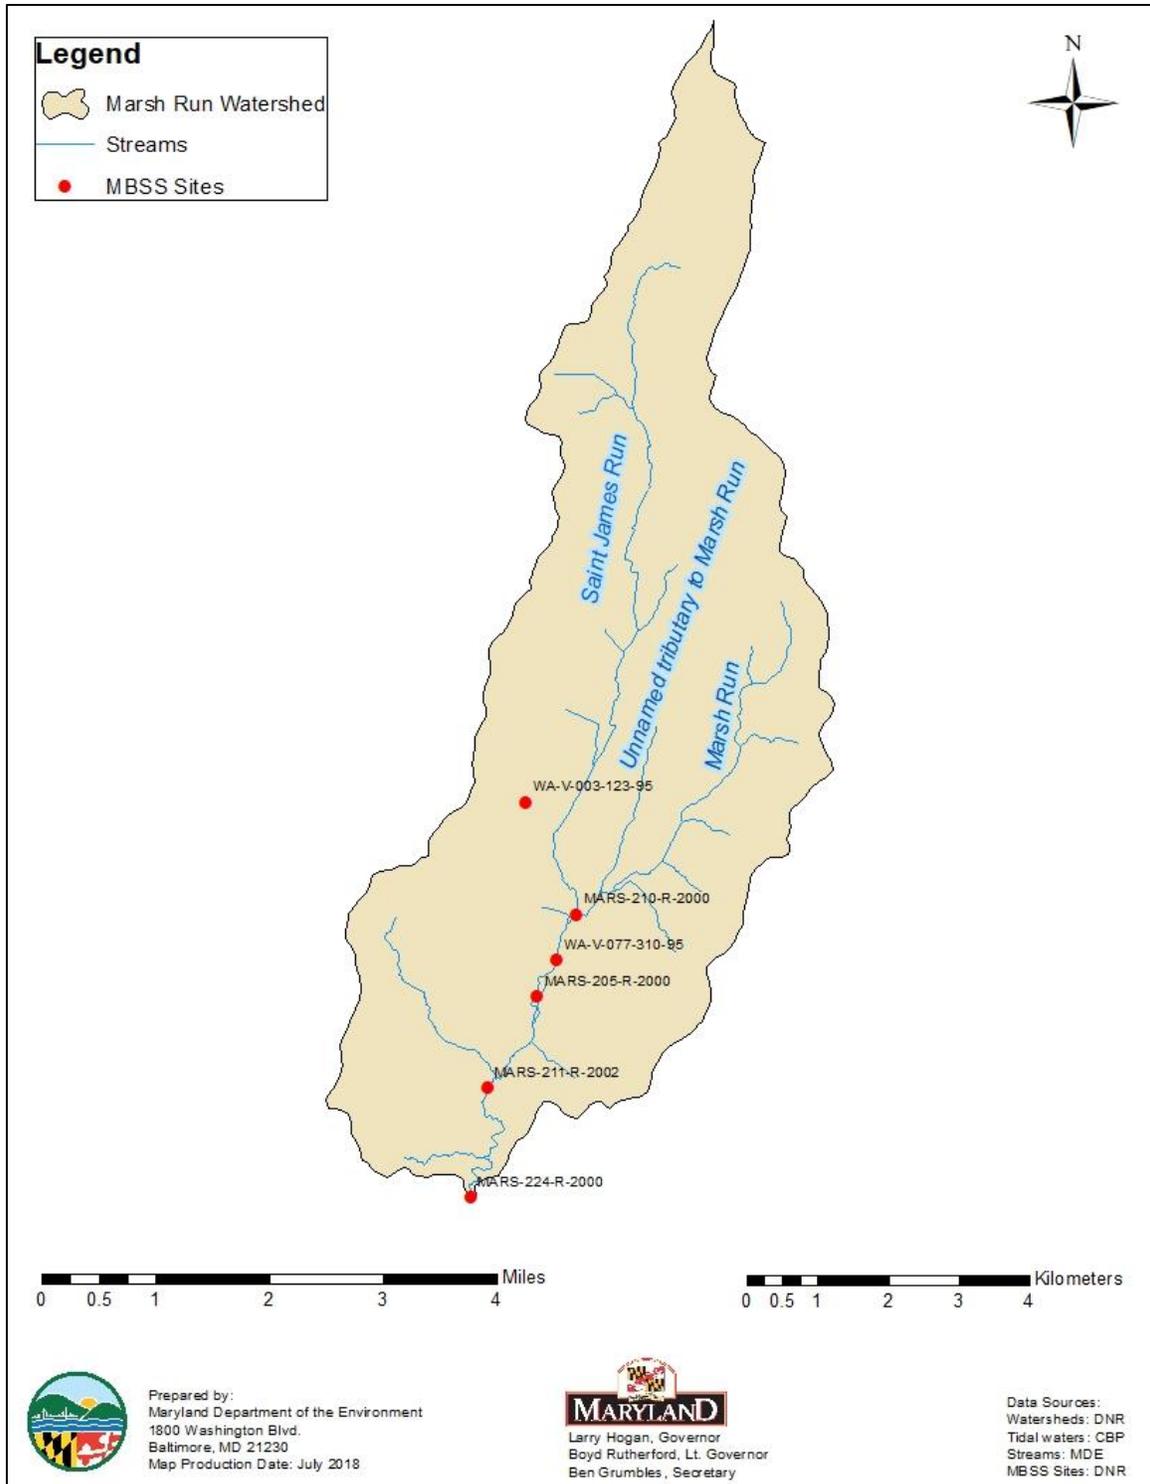


Figure 3: Monitoring Stations in the Marsh Run Watershed

2.4 Water Quality Impairment

The Maryland Surface Water Use Designation in the Code of Maryland Regulations (COMAR) for the Marsh Run watershed's tributary Saint James Run (mainstem only) is designated as Use Class IV-P – *recreational trout waters and public water supply*. Marsh Run and all other tributaries are designated as Use Class I-P – *water contact recreation, protection of aquatic life, and public water supply*. (COMAR 2018a, b, c). A map of the Designated Use Classes is provided in Figure 4.

The water quality impairment of the Marsh Run watershed addressed by this TMDL is caused, in part, by an elevated sediment load beyond a level that the watershed can sustain; thereby causing sediment related impacts to aquatic life. Assessment of aquatic life is based on Benthic Index of Biological Integrity and Fish Index of Biological Integrity (BIBI and FIBI) scores, as demonstrated via the BSID analysis for the watershed.

The Marsh Run watershed was originally listed on Maryland's 2004 Integrated Report as impaired for impacts to biological communities. The biological assessment was based on the combined results of MBSS Round 1 (1995-1997) and Round 2 (2000-2004) data, which included 6 stations. 83% of the stream miles in the watershed, were assessed as having BIBI and/or FIBI scores significantly lower than 3.0 (on a scale of 1 to 5) (MDE 2006). See Figure 3 and Table 6 for station locations and information.

The results of the BSID analysis for the Marsh Run watershed are presented in a report entitled *Watershed Report for Biological Impairment of the Marsh Run Watershed in Washington County, Maryland Biological Stressor Identification Analysis Results and Interpretation*. The report states that the degradation of biological communities in the Marsh Run watershed is strongly associated with agricultural and anthropogenic impacts, poor epifaunal substrate, high embeddedness, high sulfates, and high conductivity (MDE 2015).

The BSID analysis determined that the biological impairment in the Marsh Run watershed is due in part to stressors within the sediment parameter grouping. Overall, stressors within the sediment parameter grouping were identified as having a statistically significant association with impaired biological communities at approximately 33% of the sites with BIBI and/or FIBI scores significantly less than 3.0 throughout the watershed (MDE 2015). Therefore, since sediment is identified as a stressor to the biological communities in the Marsh Run watershed, the watershed was listed as impaired by sediment in the 2018 Integrated Report, and a TMDL is required.

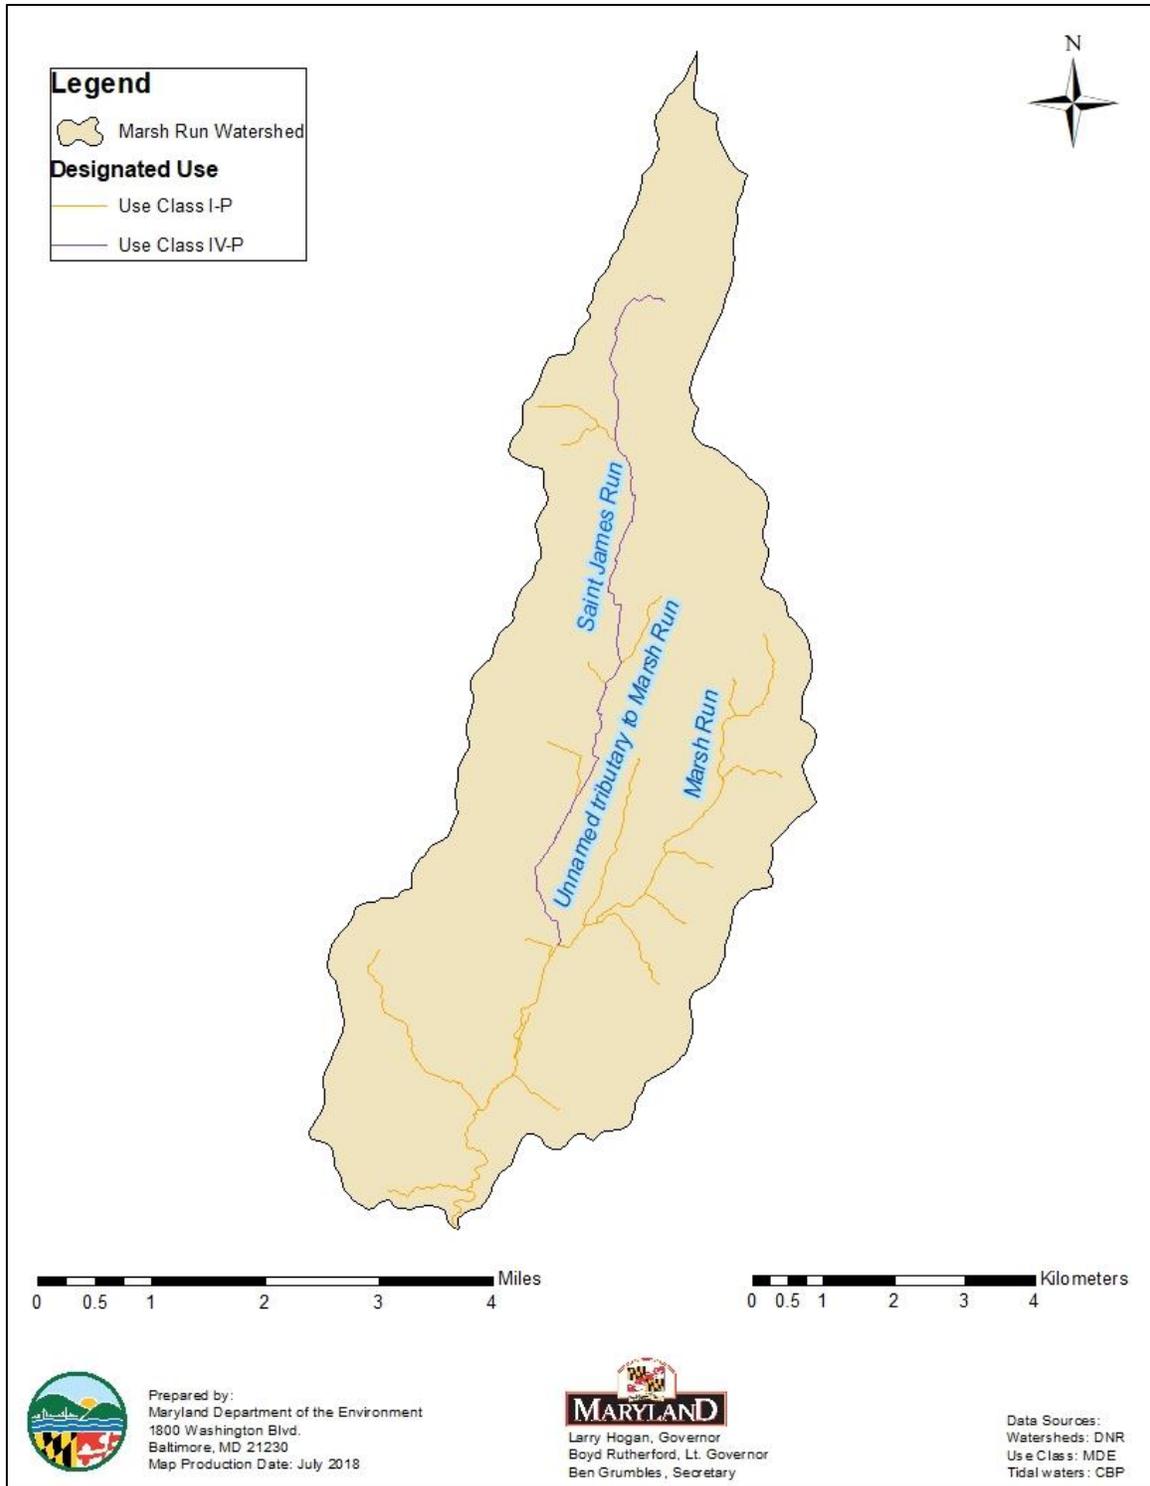


Figure 4: Designated Use Classes of the Marsh Run Watershed in Washington County, Maryland

FINAL

3.0 TARGETED WATER QUALITY GOAL

The objective of the sediment TMDL established herein is to reduce sediment loads, and their detrimental effects on aquatic life in the Marsh Run watershed, to levels that support the Use Class I-P/IV-P designations for the watershed. Excessive sediment has been identified by the USEPA as the leading cause of impairment of our nation's waters, and as contributing to the decline of populations of aquatic life in North America (USEPA 2006). Sediment in streams may reduce visibility, preventing fish from seeing their prey, and may clog gills and filter feeding mechanisms of fish and benthic (bottom-dwelling) organisms. Excessive deposition of sediment on streambeds may bury eggs or larvae of fish and benthic macroinvertebrates, or degrade habitat by clogging the interstitial spaces between sand and gravel particles. Excessive sediment can also create hazards for recreation due to low visibility and the possibility of unseen objects.

The CWA requires TMDLs to be protective of all the designated uses applicable to a particular waterbody. The primary focus of this TMDL is the designated use of protection of aquatic life because the Integrated Report listing was based on a biological assessment of the watershed. The biological assessment revealed the current levels of TSS and other pollutants prevent the watershed from achieving its designated use of supporting aquatic life. The required reductions within the TMDL are expected to protect all designated uses of the watershed from sediment impacts, including water contact recreation. Aquatic life is more sensitive to sediment impacts than recreation because of continuous exposure that can affect respiration and propagation. Recreation, on the other hand, is sporadic and sediment is unlikely to pose a human health risk due to dermal contact or minimal ingestion that would occur during recreation. Additionally, USEPA's *Framework for Developing Suspended and Bedded Sediments (SABS) Water Quality Criteria* states:

“... where multiple designated uses (such as aquatic life and irrigation) overlap in a waterbody or on a specific segment or portion of the waterbody, SABS criteria established to protect the aquatic life use most likely will be stringent enough to protect all other uses except perhaps drinking water uses.” (USEPA 2006)

This TMDL's protection of aquatic life from sediment impacts includes protection of trout and therefore support the recreational trout waters designated use. Narrative sediment criteria for recreational trout waters (Use Class IV) are the same as that for Use Class I waters. Therefore, if the TMDL is at a sediment level to support aquatic life (Use Class I), it is also meeting sediment requirements for recreational trout waters. Additionally, five of the eleven reference watersheds contain recreational trout waters (Use Class IV). Therefore, it can be inferred that setting sediment values based on these reference watersheds would be supportive of trout waters.

Marsh Run Watershed Use Classes also include the public water supply designation (-P). Narrative sediment criteria for public water supply are the same as that for Use Class I waters. Therefore, if the TMDL is at a sediment level to support aquatic life (Use Class I), it is also meeting sediment requirements for public water supply. Additionally, ten of the eleven reference watersheds contain public water supply designations. Therefore, it

FINAL

can be inferred that setting sediment values based on these reference watersheds would be supportive of public water supply.

Reductions in sediment loads are expected to result from decreased watershed erosion, which will then lead to improved benthic and fish habitat conditions. Specifically, sediment load reductions are expected to result in an increase in the number of benthic sensitive species present, an increase in the available and suitable habitat for a benthic community, a decrease in fine sediment (fines), and improved stream habitat diversity, all of which will result in improved water quality.

The TMDL will not completely resolve the impairment to biological communities within the watershed, since the BSID watershed analysis also identifies additional possible stressors impacting the biological conditions (e.g. sulfates). This impairment to aquatic life will only be fully addressed when all substances identified as impairing biological communities in the watershed are reduced to levels that will meet water quality standards. (MDE 2009a, 2015).

FINAL

4.0 TOTAL MAXIMUM DAILY LOADS AND SOURCE ALLOCATION

4.1 Overview

This section describes how the sediment TMDL and the corresponding allocations were developed for the Marsh Run watershed.

4.2 Analysis Framework

Since there are no specific numeric criteria in Maryland that quantify the impact of sediment on the aquatic life of stream systems, a reference watershed approach was used to establish the TMDL. In order to use a reference watershed approach, sediment loads were estimated using a watershed model. For this analysis, the CBP P5.3.2 model was used to calculate the sediment loads used in the reference watershed approach.

Watershed Model

The CBP P5.3.2 watershed model was chosen to estimate the sediment loads for the Marsh Run watershed TMDL and the loads were expressed as EOS sediment loads. The spatial domain of the CBP P5.3.2 watershed model segmentation aggregates to the MD 8-digit watersheds, which is with the scale of the impairment listing. The nonpoint source baseline sediment loads generated within the Marsh Run watershed are based on the EOS loads from the CBP P5.3.2 watershed model 2009 Progress Scenario. CBP P5.3.2 Progress Scenario EOS loads are calculated as the sum of individual land-use EOS loads within the watershed and represent a long-term average loading rate. Individual land-use EOS loads are calculated within the CBP P5.3.2 watershed model as a product of the land-use area, land-use target EOF loading rate, and loss from the EOF to the main channel. BMP data and reduction efficiencies are then subsequently applied to produce the final EOS loads. The loss from the EOF to the main channel is the *sediment delivery factor* and is defined as the ratio of the sediment load reaching a basin outlet to the total erosion within the basin. A *sediment delivery factor* is estimated for each land-use type based on the proximity of the land-use to the main channel. Thus, as the distance to the main channel increases, more sediment is stored within the watershed (i.e., *sediment delivery factor* decreases). Details of the data sources for the unit loading rates can be found in Section 2.2 of this report.

Reference Watershed Approach

In order to quantify the impact of sediment on the aquatic life of stream systems, a reference watershed TMDL approach was used. Reference watersheds are those watersheds that are identified as supporting aquatic life, based on Maryland's biological assessment methodology. The biological assessment methodology assesses biological impairment at the watershed scale based on the percentage of MBSS monitoring stations, translated into watershed stream miles, that have BIBI and/or FIBI scores lower than the Minimum Allowable IBI Limit (MAL). The MAL represents the threshold under which a watershed is listed as impaired for biology and is calculated based on the average annual allowable IBI value of 3.0 (on a scale of 1 to 5), the coefficient of variation of annual sentinel site results, and an assumed normal distribution. It accounts for annual variability

FINAL

and helps to avoid classification errors (i.e., false positives) when assessing for biological impairments (Roth et al. 1998, 2000; Stribling et al. 1998; MDE 2014a). For a full description of the selection of reference watersheds, please see *A Methodology for Addressing Sediment Impairments in Maryland's Watersheds* (MDE 2006).

Comparison of sediment loads from impaired watersheds to loads from reference watersheds requires that the watersheds be similar in physical and hydrological characteristics. To satisfy this requirement, MDE 2006 selected reference watersheds only from the Highland and Piedmont physiographic regions. This region is consistent with the non-coastal region that was identified in the 1998 development of FIBI and subsequently used in the development of BIBI (Roth et al. 1998; Stribling et al. 1998). Reference groups for both the Coastal Plain and the Eastern Shore have also been defined using the same approach.

To further reduce the effect of the variability within the Highland and Piedmont physiographic regions (i.e., soils, slope, etc.), the watershed sediment loads were then normalized by a constant background condition, the all forested watershed condition. This new normalized term, defined as the *forest normalized sediment load* (Y_n), represents how many times greater the current watershed sediment load is than the *all forested sediment load* (y_{for}). The y_{for} is a modeled simulation of what the sediment load would be if the watershed were in its natural all forested state, instead of its current mixed land use. It is calculated using the CBP P5.3.2 model. The *forest normalized sediment load* for this TMDL is calculated as the baseline watershed sediment load divided by the *all forested sediment load*. The equation for the *forest normalized sediment load* is as follows:

$$Y_n = \frac{y_{ws}}{y_{for}} \quad \text{(Equation 4.1)}$$

Where:

Y_n = forest normalized sediment load

y_{ws} = current watershed sediment load (ton/yr)

y_{for} = all forested sediment load (ton/yr)

FINAL

Eleven reference watersheds were identified in the Highland and Piedmont physiographic regions. Reference watershed *forest normalized sediment loads* were calculated using CBP P5.3.2 watershed model 2009 Progress Scenario EOS loads. The median and 75th percentile of the reference watershed *forest normalized sediment loads* were calculated and found to be 3.6 and 7.2 respectively¹. The median value of 3.6 was used as an environmentally conservative approach for establishing the sediment loading threshold for the TMDL (see Appendix A for more details).

The *forest normalized sediment load* for the Marsh Run watershed, estimated as 5.2, was calculated using CBP P5.3.2 2009 Progress Scenario EOS loads, as follows:

$$Y_n = \frac{y_{ws}}{y_{for}} = \frac{10,817 \text{ ton/yr}}{2,060 \text{ ton/yr}} = 5.2 \quad (\text{Calculation 4.1})$$

A comparison of the Marsh Run watershed *forest normalized sediment loads* to the *sediment loading threshold* demonstrates that the watershed exceeds the *sediment loading threshold*, indicating that it is receiving loads above the maximum allowable load that it can sustain and still meet water quality standards.

4.3 Scenario Descriptions and Results

The following analyses compare baseline conditions in the watershed (under which water quality problems exist) with potential future conditions, which project the water quality response to various simulated sediment load reductions. The analyses are grouped according to baseline conditions and future conditions associated with TMDLs.

Baseline Conditions

The baseline conditions are intended to provide a point of reference by which to compare the future scenario that simulates conditions of a TMDL. Baseline loads are calculated for nonpoint and point source loads. Point source loads can be subdivided into two categories, wastewater and stormwater.

The Marsh Run watershed baseline nonpoint source sediment loads are estimated using the land-use and EOS sediment loading rates from the CBP P5.3.2 2009 Progress Scenario. The 2009 Progress Scenario was chosen because it is used as the baseline year in the Chesapeake Bay TMDL. The 2009 Progress Scenario represents 2009 land-use and BMP implementation simulated using precipitation and other meteorological inputs from the period 1990-2000 to represent variable hydrological conditions, thereby addressing annual changes in hydrology and capturing wet, average and dry years. The period 1991-2000 is the hydrological simulation period for the Chesapeake Bay TMDL.

¹ The 75th percentile value of reference condition streams was recommended by USEPA to be used in establishing numerical criteria (MDE 2006). The median was found, for the sediment reference watersheds, to be approximately equivalent to other more complex statistical analyses and was used for ease of calculation (MDE 2009b). Both of these values ensure that the selected threshold will represent the reference group values, with the median being more conservative (lower).

FINAL

In general, wastewater point source baseline sediment loads are estimated based on the existing permit information. There are no wastewater point sources with TSS limits in the Marsh Run watershed. The stormwater point source baseline sediment loads are also based on CBP 5.3.2 loading rates, specifically those for urban land use. Details of these loading source estimates can be found in Section 2.2 and the technical memorandum to this document entitled *Point Sources of Sediment in the Marsh Run Watershed*.

TMDL Conditions

The TMDL scenario simulates conditions under which sediment loads have been reduced to levels that support aquatic life. In the TMDL calculation, the allowable load for the impaired watershed is calculated as the product of the *sediment loading threshold* (determined from watersheds with a healthy biological community) and the Marsh Run watershed *all forested sediment load* (see Section 4.2). The resulting load is considered the maximum allowable load the watershed can sustain and support aquatic life.

The TMDL loading and associated reductions are averaged at the watershed scale; however, it is important to recognize that some subwatersheds may require higher reductions than others, depending on the distribution of the land-use.

The formula for estimating the TMDL is as follows:

$$TMDL = \sum_{i=1}^n Yn_{ref} \cdot y_{for_i} \quad (\text{Equation 4.2})$$

Where:

TMDL = allowable load for impaired watershed (ton/yr)

Yn_{ref} = sediment loading threshold

y_{for_i} = all forested sediment load for CBP P5.3.2 model segment i (ton/yr)

i = CBP P5.3.2 model segment

n = number of CBP P5.3.2 model segments in watershed

4.4 Critical Condition and Seasonality

USEPA's regulations require TMDLs to take into account seasonality and critical conditions for stream flow, loading, and water quality parameters (CFR 2012b). The intent of this requirement is to ensure that the water quality of the waterbody is protected during times when it is most vulnerable. The biological monitoring data used to determine the reference watersheds reflect the impacts of stressors (i.e., sediment impacts to stream biota) over the course of time and therefore depict an average stream condition (i.e., captures all high and low flow events). Since the TMDL endpoint is based on the median of forest normalized loads from watersheds assessed as having good biological conditions (i.e., passing Maryland's biological assessment), by the nature of the biological data described above, it must inherently include the critical conditions of the

FINAL

reference watersheds. Therefore, since the TMDL reduces the watershed sediment load to a level compatible with that of the reference watersheds, critical conditions are inherently addressed. Moreover, the sediment loading rates used in the TMDL were determined using the CBP P5.3.2 model, which is a continuous simulation model with a simulation period 1991-2000, based on Hydrological Simulation Program Fortran (HSPF) model, thereby addressing annual changes in hydrology and capturing wet, average, and dry years. It should also be noted that the biological impact of sediment generally occurs over time and therefore use of a long term modeling approach also contributes to capturing critical conditions.

Seasonality is captured in two components. First, it is implicitly included through the use of the biological monitoring data as this data reflects the impacts of stressors over time, as described above. Second, the MBSS dataset included benthic sampling in the spring (March 1 - April 30) and fish sampling in the summer (June 1 - September 30). Benthic sampling in the spring allows for the most accurate assessment of the benthic population, and therefore provides an excellent means of assessing the anthropogenic effects of sediment impacts on the benthic community. Fish sampling is conducted in the summer when low flow conditions significantly limit the physical habitat of the fish community, and it is therefore most reflective of the effects of anthropogenic stressors as well.

4.5 TMDL Loading Caps

This section presents the Marsh Run watershed average annual sediment TMDL. This load is considered the maximum allowable long-term average annual load the watershed can sustain and support aquatic life.

The long-term average annual TMDL was calculated for the Marsh Run watershed based on Equation 4.2 and set at a load 3.6 times the all forested condition of the watershed. In order to attain the TMDL loading cap calculated for the watershed, reductions were applied to the predominant sediment sources (i.e., significant contributors of sediment to the stream system), independent of jurisdiction. Sediment reductions are also required in the Marsh Run watershed to meet the sediment allocations assigned under the 2010 Chesapeake Bay TMDL for sediment in the Potomac Tidal Fresh Water Quality Segment. To ensure consistency with the Bay TMDL, and therefore efficiency in the reduction of sediment loads, reductions will be applied to the same sediment sources identified in Maryland's Watershed Implementation Plans (WIPs) for the Bay TMDL, as applicable in the watershed. These include: (1) regulated developed land; (2) conventional till crops, conservation till crops, hay, and pasture; (3) harvested forest; (4) unregulated animal feeding operations and concentrated animal feeding operations (CAFOs); and (5) industrial wastewater sources and municipal wastewater treatment plants. In this TMDL, reductions were also applied to unregulated urban loads. Forest land is not assigned reductions because it is considered the most natural condition in the watershed.

The Marsh Run Watershed Baseline Load and TMDL are presented in Table 7.

Table 7: Marsh Run Watershed Baseline Load and TMDL

Baseline Load (ton/yr)	TMDL (ton/yr)	Total Reduction (%)
10,817	7,418	31

4.6 Load Allocations Between Nonpoint and Point Sources

Per USEPA regulation, all TMDLs need to be presented as a sum of Wasteload Allocations (WLAs) for point sources and Load Allocations (LAs) for nonpoint source loads generated within the assessment unit, accounting for natural background, tributary, and adjacent segment loads (CFR 2012a). The State reserves the right to allocate the TMDL among different sources in any manner that protects aquatic life from sediment related impacts.

Load Allocation

Individual LAs for each nonpoint land-use sector were calculated using the allocation methodology in the MD Phase I Watershed Implementation Plan (WIP), which was designed to be equitable, effective, and consistent with water quality standards (MDE 2010). The allocations were calculated by applying equal reductions to the *reducible* loads of all sectors. The *reducible* load is defined as the difference between the No Action (NA) scenario and the “Everything, Everyone, Everywhere” (E3) scenario. The NA scenario represents current land-uses without any sediment controls applied, while the E3 scenario represents the application of all possible BMPs and control technologies to current land-use. For more detailed information regarding the calculation of the LA, please see *Maryland’s Phase I Watershed Implementation Plan for the Chesapeake Bay Total Maximum Daily Load*.

In this watershed, unregulated urban land, pasture and crop land were identified as the predominant nonpoint sources of sediment and require reductions. Other land uses that individually contributed less than 1% of the total sediment load were not reduced as they would produce no discernible reductions. Forest is not assigned reductions, as it represents the most natural condition in the watershed. Sediment loads from regulated urban lands under National Pollutant Discharge Elimination System (NPDES) permits are considered point source loads that must be included in the WLA portion of a TMDL (USEPA 2002).

In this document, the LA for the Marsh Run watershed is expressed as one aggregate value for all nonpoint sources, including unregulated urban land use. For more detailed information regarding the Marsh Run watershed TMDL nonpoint source LA, please see the technical memorandum to this document entitled *Nonpoint Sources of Sediment in the Marsh Run Watershed*.

A summary of the baseline and load allocation for nonpoint sources is presented in Table 8. The percent reduction shown in Table 8 does not represent the reduction applied to reducible loads, but the required reduction between the allocation and the baseline load.

FINAL

Wasteload Allocation

The WLA of the Marsh Run watershed is allocated to two permitted source categories, the Wastewater WLA and the Stormwater WLA. The categories are described below.

Wastewater WLA

Wastewater permits with specific TSS limits and corresponding flow information are assigned a WLA. In this case, detailed information is available to accurately estimate the WLA. If specific TSS limits are not explicitly stated in the wastewater permit, then TSS loads are expected to be *de minimis*. If loads are *de minimis*, they pose little risk to the aquatic environment.

Wastewater permits with specific TSS limits include:

- Individual industrial facilities
- Individual municipal facilities
- General mineral mining facilities

There are no wastewater sources with explicit TSS limits in the Marsh Run watershed that contribute to the watershed sediment load.

Stormwater WLA

NPDES stormwater program are point sources that must be included in the WLA portion of a TMDL” (USEPA 2002). Phase I and II permits can include the following types of discharges:

- Small, medium, and large municipal separate storm sewer systems (MS4s)
 - these can be owned by local jurisdictions, municipalities, and state and federal entities (e.g., departments of transportation, hospitals, military bases),
- Industrial facilities permitted for stormwater discharges, and
- Small and large construction sites
- Mineral mining facilities that do not have TSS limits

USEPA currently recommends that WLAs for NPDES regulated stormwater discharges be expressed as different WLAs for different identifiable categories (e.g., separate WLAs for MS4 and industrial stormwater discharges). These categories should be defined as narrowly as available information allows (e.g., for municipalities, separate WLAs for each municipality and for industrial sources, separate WLAs for different types of industrial stormwater sources or dischargers). In general, states are encouraged to disaggregate the WLA to facilitate implementation. USEPA recognizes that available data and information are usually not detailed enough to determine WLAs for NPDES regulated stormwater discharges on an outfall-specific basis (USEPA 2014).

FINAL

The Marsh Run NPDES Stormwater WLA is based on reductions applied to the sediment load from the portion of the urban land-use in the watershed associated with NPDES regulated stormwater permits. The NPDES stormwater WLA is calculated in the same manner as the load allocation for unregulated urban land acreage. Some of these sources may also be subject to controls from other management programs. The Marsh Run NPDES Stormwater WLA requires an overall reduction of 59% (see Table 8).

Table 8: Marsh Run Watershed TMDL Reductions by Source Category

	Baseline Load Source Categories		Baseline Load (ton/yr)	TMDL Components	TMDL (ton/yr)	Reduction (%)
Marsh Run Watershed contribution	Nonpoint Source		9,473	LA	6,870	27
	Point Source	Regulated Stormwater	1,344	WLA	548	59
		Wastewater	0		0	0
Total			10,817		7,418	31

For more information on the methods used to calculate the NPDES regulated stormwater baseline sediment load, see Section 2.2.2. For a detailed list of all of the NPDES regulated stormwater discharges within the watershed and information regarding the NPDES stormwater WLA distribution amongst these discharges, please see the technical memorandum to this document entitled *Point Sources of Sediment in the Marsh Run Watershed*.

As stormwater assessment and/or other program monitoring efforts result in a more refined source assessment, MDE reserves the right to revise the current NPDES Stormwater WLA provided the revisions protect aquatic life from sediment related impacts.

4.7 Margin of Safety

All TMDLs must include a margin of safety (MOS) to account for any lack of knowledge and uncertainty concerning the relationship between loads and water quality (CFR 2012b). The MOS shall also account for any rounding errors generated in the various calculations used in the development of the TMDL. This TMDL was developed using an environmentally conservative approach that implicitly incorporates an MOS.

Specifically, as was described in Section 4.2, the reference watershed forest normalized EOS loads were chosen in a conservative manner. Analysis of the reference group *forest normalized sediment loads* indicates that the 75th percentile of the reference watersheds is a value of 7.2 and that the median value is 3.6. For this analysis, the *sediment loading threshold* was set at the median value of 3.6 (MDE 2006). Use of the median as the

FINAL

threshold creates an environmentally conservative estimate, and results in an implicit MOS.

4.8 Summary of Total Maximum Daily Loads

The average annual Marsh Run watershed TMDL is summarized in Table 9. The TMDL is the sum of the LA, NPDES Stormwater WLA, Wastewater WLA, and MOS. The attainment of water quality standards within the Marsh Run watershed can only be achieved by meeting the average annual TMDL of TSS specified for the watershed within this report. The Maximum Daily Load (MDL) is summarized in Table 10 (See Appendix B for more details).

Table 9: Marsh Run Watershed Average Annual TMDL of TSS (ton/yr)

TMDL	=	L_{AMR}	+	NPDES Stormwater WLA_{MR}	+	Wastewater WLA_{MR}	+	MOS
7,418	=	6,870	+	548	+	0	+	Implicit

Table 10: Marsh Run Watershed Maximum Daily Load of TSS (ton/day)

MDL (ton/day)	=	L_{AMR}	+	NPDES Stormwater WLA_{MR}	+	Wastewater WLA_{MR}	+	MOS
6.3	=	5.8	+	0.5	+	0	+	Implicit

FINAL

5.0 ASSURANCE OF IMPLEMENTATION

Section 303(d) of the CWA and current USEPA regulations require reasonable assurance that the sediment TMDL can and will be implemented (CFR 2012b). This section provides the basis for reasonable assurance that the sediment TMDL in the Marsh Run watershed will be achieved and maintained.

While this TMDL establishes a sediment loading target for the watershed, watershed managers and other stakeholders should always remain cognizant that the endpoint of this TMDL, and hence the definition of its successful implementation, is based on in-stream biological health. Load reductions are critical to tracking this effort, since the TMDL target is defined as the point where sediment loads match those seen in reference watersheds, but the watershed cannot be delisted or classified as meeting water quality standards until it is demonstrated that the biological health of the stream system is no longer impaired by sediment. In planning any implementation efforts related to this TMDL, careful consideration should be given both to the sediment load reductions, and to the direct potential impacts on biological communities.

MS4 Permit Implementation Plans

MDE published the Final Determination to Issue a Stormwater Permit to the State Highway Administration in October 2015. The permit states, “*By regulation at 40 CFR §122.44, BMPs and programs implemented pursuant to this permit must be consistent with applicable WLAs developed under [US]EPA approved TMDLs.*”

Section IV.E. of the permit details requirements for *Restoration Plans and Total Maximum Daily Loads*. Within one year of permit issuance, the permittee is required to submit an implementation plan for each stormwater WLA approved by the USEPA prior to the effective date of the permit. For TMDLs approved after the permit, implementation plans are due within one year of the USEPA approval of the TMDL. Implementation plans should include the following: a detailed implementation schedule, the final date for meeting applicable WLAs, a detailed cost estimate for all elements of the plan, a system that evaluates and tracks implementation through monitoring or modeling to document progress towards meeting established benchmarks, deadlines, and stormwater WLAs, and a public participation program. An annual TMDL assessment report shall also be submitted to MDE. Many of the practices which are described in the permittees’ stormwater WLA implementation plans may also be used by the permittees as retrofits for meeting their impervious area restoration requirements.

Stormwater retrofits can address both water quality and quantity. Examples of these retrofits include the reduction of impervious surfaces, modification of existing or installation of new stormwater structural practices, increased urban tree canopy, and stream restoration projects. Based on estimates by CBP, stormwater retrofit reductions range from as low as 10% for dry detention, to approximately 80% for wet ponds, wetlands, infiltration practices, and filtering practices (USEPA 2003b).

FINAL

For more information on the MS4 permits, please see [Maryland's NPDES Municipal Separate Storm Sewer System \(MS4\) Permits](#).

General Permit for Discharges from Small MS4s

MDE published the Final Determination to Issue the General Permit for Discharges from Small Municipal Separate Storm Sewer Systems (MS4s) in April 2018. The permit states that MS4 owners and operators must meet the following requirement:

“Attain applicable wasteload allocations (WLAs) for each established or approved Total Maximum Daily Load (TMDL) for each receiving water body, consistent with Title 33 of the U.S. Code (USC) 1342(p)(3)(B)(iii); 40 CFR § 122.44(k)(2)...”

Section V of the permit details requirements for *Chesapeake Bay Restoration and Meeting Total Maximum Daily Loads*. The general permit will require small MS4s to commence restoration efforts for twenty percent of existing developed lands that have little or no stormwater management. The five-year permit term requires permittees to develop planning strategies and work toward implementing water quality improvement projects. Restoration planning strategies and implementation schedules required under the general permit are consistent with addressing the water quality goals of the Chesapeake Bay TMDL by 2025. The general permit requires permittees to perform watershed assessments, identify water quality improvement opportunities, secure appropriate funding, and develop an implementation schedule to show the twenty percent impervious area restoration requirement will be achieved by 2025.

Stormwater retrofits can address both water quality and quantity. Examples of these retrofits include the reduction of impervious surfaces, modification of existing or installation of new stormwater structural practices, increased urban tree canopy, and stream restoration projects. Based on estimates by CBP, stormwater retrofit reductions range from as low as 10% for dry detention, to approximately 80% for wet ponds, wetlands, infiltration practices, and filtering practices (USEPA 2003b).

For more information on the MS4 permits, please see [Maryland's NPDES Municipal Separate Storm Sewer System \(MS4\) Permits](#).

2010 Chesapeake Bay TMDLs

Implementation of the TMDL for sediment in the Marsh Run watershed is expected to occur in parallel with implementation efforts for the 2010 Chesapeake Bay TMDLs for nutrients and sediment in the Potomac Tidal Fresh Water Quality Segment. While the objectives of the two efforts differ, with the 2010 Bay TMDLs focused on tidal water quality and this TMDL targeting biological integrity in streams, many of the sediment reductions achieved through implementation activities should result in progress toward both goals.

FINAL

The strategies for implementing the 2010 Bay TMDLs are described in Maryland's Phase I WIP (MDE 2010) and Phase II WIP (MDE 2012). The WIPs are the centerpieces of the State's "reasonable assurance" of implementation for the 2010 Bay TMDLs, and the strategies encompass a host of BMPs, pollution controls and other actions for all source sectors that cumulatively will result in meeting the State's 2025 targets, as verified by the Chesapeake Bay Water Quality Sediment Transport Model. In particular, the implementation of practices to reduce sediment loadings from the agricultural and urban stormwater sectors should result in decreased loads in the Marsh Run watershed's streams.

Nonpoint Source Urban Lands

Generally speaking, urban areas that do not have NPDES permits do not have mandatory restoration requirements and restoration activities are largely voluntary. The State makes several efforts to encourage jurisdictions to conduct voluntary activities by providing technical assistance and funding opportunities to guide and support local actions. For example, Section 319 of the Clean Water Act provides federal grants to assist in NPS management. Section 319(b) requires preparation of a state NPS management program plan for approval by the US Environmental Protection Agency. Maryland's most recent plan, *Maryland's 2015-2019 Nonpoint Source Management Plan*, addresses NPS according to pollutant and source. There are several programs listed in the report that address urban NPS, including Maryland Bay-Wise Program, Maryland Green Schools Awards, and the SMART Homeowner Reporting Program. Additionally, MDE is conducting outreach to non-MS4 jurisdictions regarding stormwater management requirements and retrofit BMPs. Funding sources for urban nonpoint source pollutants include: Federal 319(h) grants, Chesapeake and Atlantic Coastal Bays Trust Fund, and the State Revolving Loan Fund. More information on Maryland's NPS management program can be found at:

<http://mde.maryland.gov/programs/Water/319NonPointSource/Pages/index.aspx>.

Further efforts include offering competitive grant opportunities through the Chesapeake Bay Trust (CBT). Each year since 2015, MDE and MDDNR have entered into an agreement to pass federal funding through to local jurisdictions to enhance their ability to restore local water quality. The CBT administers the grant process with these funds and awards over \$1.2M for use by regulated and non-NPDES jurisdictions. More information about this funding can be found on the CBT website here: https://cbtrust.org/wp-content/uploads/WAGP-2YR-Milestone-2017-2018_FINAL.pdf This grant opportunity combined with technical assistance offered to successful candidates is one more example of the State's plan to address the load allocations and to ensure a better level of reasonable assurance that the TMDL endpoints will be achieved.

Implementation of Agricultural Best Management Practices

In agricultural areas comprehensive soil conservation plans can be developed that meet criteria of the USDA-NRCS Field Office Technical Guide (USDA 1983). Soil conservation plans help control erosion by modifying cultural practices or structural practices. The reduction percentage attributed to cultural practices is determined based on changes in land-use, while structural practices have a reduction percentage of up to 25%.

FINAL

In addition, sediment loadings from livestock can be controlled via stream fencing and rotational grazing. Sediment reduction efficiencies of methods applicable to pasture land-use range from 40% to 75% (USEPA 2004). Lastly, riparian buffers can reduce the effect of agricultural sediment sources through trapping and filtering.

Funding of Agricultural Best Management Practices

These measures can be funded through Maryland Department of Agriculture's (MDA's) Maryland Agricultural Water Quality Cost-Share (MACS) Program and USDA's Environmental Quality Incentives Program (EQIP) and Conservation Reserve Enhancement Program (CREP).

The MACS program was authorized in 1982 as one of several initiatives to improve water quality and achieve state water quality objectives. The MACS Program provides farmers with grants to cover up to 87.5 percent of the cost to install conservation measures known as best management practices on their farms to prevent soil erosion, manage nutrients and safeguard water quality in streams, rivers and the Chesapeake Bay.

Through EQIP, NRCS provides agricultural producers with financial resources and one-on-one help to plan and implement improvements, or what NRCS calls conservation practices. Using these practices can lead to cleaner water and air, healthier soil and better wildlife habitat, all while improving agricultural operations.

The U.S. Department of Agriculture (USDA) and the State of Maryland have partnered in implementing a voluntary CREP to enroll up to 100,000 acres of agricultural land situated in Maryland. The Maryland Chesapeake Bay CREP is intended to improve water quality, reduce soil erosion, reduce the amount of sediment, phosphorous and other pollutants entering waterbodies, improve wildlife habitat and restore wetlands. With CREP, high-priority conservation goals are identified by the state, and then federal funds are supplemented with non-federal funds to achieve those goals.

Maryland Funding Programs

In response to the WIP and the increased responsibility for local governments to achieve nutrient and sediment reduction goals, Maryland has continued to increase funding in the Chesapeake and Atlantic Coastal Bays Trust Fund. *'Historical and Projected Chesapeake Bay Restoration Spending: A Report to the Maryland General Assembly pursuant to the 2018 Joint Chairman's Report'* about Section 40 of Maryland's Operating Budget, even though the annual restoration funds for the four agencies [MDDNR, MDA, MDE, MDP] varies from year to year, the total restoration funds for the first three years of the its evaluated time period (FY00 – FY02) was \$882,327,165, while the total for the past three years of the period (FY15 – FY17) was \$2,657,862,414, an increase of 201.2 percent. This increase was driven in part by the creation and subsequent funding increases in the two primary Bay restoration Special Funds: The Bay Restoration Fund and the Chesapeake and Atlantic Coastal Bays 2010 Trust Fund (MDE et al. 2018). For more information on Maryland's implementation and funding strategies to achieve nutrient and sediment reductions throughout the State's portion of the Chesapeake Bay watershed, please see [Maryland's Phase II Watershed Implementation Plan](#).

FINAL

Some other examples of programs that can provide funding for local governments and agricultural sources include the Federal Nonpoint Source Management Program (§ 319 of the Clean Water Act), the Buffer Incentive Program (BIP), the State Water Quality Revolving Loan Fund and the Maryland Agricultural Water Quality Cost-Share Program.

In summary, through the use of the aforementioned funding mechanisms and BMPs, there is reasonable assurance that this TMDL can be implemented.

Additional Biological Stressors

As has been stated previously in this report, the biological impairment in this watershed is due to multiple stressors, not just sediment. While reducing TSS will bring about a water quality impact in terms of clarity, achieving a positive impact in stream biological communities might require several stressors to be addressed. These stressors were described in the Marsh Run BSID report.

Many of the implementation actions to address sediment could concurrently address the other stressors identified in the BSID report. Since biological improvements will likely only be seen when multiple structural and pollutant stressors are addressed, watershed managers developing plans to address sediment should consider the effect of restoration projects on other stressors. Where possible, preference should be given to designs that address multiple stressors.

FINAL

REFERENCES

- CFR (Code of Federal Regulations). 2012a. *40 CFR 130.2(i)*.
<https://www.gpo.gov/fdsys/pkg/CFR-2011-title40-vol22/pdf/CFR-2011-title40-vol22-sec130-2.pdf>
- _____. 2012b. *40 CFR 130.7*.
<https://www.gpo.gov/fdsys/pkg/CFR-2011-title40-vol22/pdf/CFR-2011-title40-vol22-sec130-7.pdf>
- Claggett, P., F. M. Irani, and R. L. Thompson. 2012. *Estimating the Extent of Impervious Surfaces and Turf Grass across Large Regions*. Annapolis, MD: United States Geological Survey, Chesapeake Bay Program Office.
- Cochran, W. G. 1977. *Sampling Techniques*. New York: John Wiley and Sons.
- COMAR (Code of Maryland Regulations). 2018a. *26.08.02.02 B(2 & 8); 26.08.02.02-1*.
<http://www.dsd.state.md.us/comar/comarhtml/26/26.08.02.02.htm> (Accessed August 2018).
- _____. 2018b. *26.08.02.08 Q(1) & (6)(h)*.
<http://www.dsd.state.md.us/comar/comarhtml/26/26.08.02.08.htm> (Accessed August 2018).
- _____. 2018c. *26.08.02.07 A & E*.
<http://www.dsd.state.md.us/comar/comarhtml/26/26.08.02.07.htm> (Accessed August 2018).
- _____. 2018d. *26.08.02.04*.
<http://www.dsd.state.md.us/comar/comarhtml/26/26.08.02.04.htm> (Accessed August 2018).
- Klauda, R., P. Kazyak, S. Stranko, M. Southerland, N. Roth, and J. Chaillou. 1998. The Maryland Biological Stream Survey: A State Agency Program to Assess the Impact of Anthropogenic Stresses on Stream Habitat Quality and Biota. *Environmental Monitoring and Assessment* 51: 299-316.
- MDE (Maryland Department of the Environment). 2006. *A Methodology for Addressing Sediment Impairments in Maryland's Watersheds*. Baltimore, MD: Maryland Department of the Environment. Also Available at
http://www.mde.state.md.us/assets/document/Sediment%20TMDL%20Method%20Report_20070728.pdf
- _____. 2009a. *Maryland Biological Stressor Identification Process*. Baltimore, MD: Maryland Department of the Environment. Also Available at:
http://www.mde.state.md.us/programs/Water/TMDL/Documents/BSID_Reports/BSID_Methodology_Final_2009.pdf

FINAL

- _____. 2009b. *Updates to A Methodology for Addressing Sediment Impairments in Maryland's Watersheds for Sediment Total Maximum Daily Loads (TMDLs) developed starting in Fiscal Year (FY) 2009*. Baltimore, MD: Maryland Department of the Environment. Also Available at:
http://www.mde.state.md.us/programs/Water/TMDL/ApprovedFinalTMDLs/Documents/www.mde.state.md.us/assets/document/Methodology_Sed-NT_Addendum_20090505.pdf
- _____. 2010. *Maryland's Phase I Watershed Implementation Plan for the Chesapeake Bay Total Maximum Daily Load*. Baltimore, MD: Maryland Department of the Environment. Also available at http://www.mde.marynad.gov/programs/Water/TMDL/TMDLImplementation/Pages/Final_Bay_WIP_2010.aspx.
- _____. 2011. *Maryland Tier II Dataset*. Baltimore, MD: Maryland Department of the Environment.
- _____. 2012. *Maryland's Phase II Watershed Implementation Plan for the Chesapeake Bay Total Maximum Daily Load*. Baltimore, MD: Maryland Department of the Environment. Also available at http://www.mde.state.md.us/programs/Water/TMDL/TMDLImplementation/Pages/FINAL_PhaseII_WIPDocument_Main.aspx.
- _____. 2014a. *Biological Assessment Methodology for Wadeable Streams*. Baltimore, MD: Maryland Department of the Environment. Also Available at:
[http://www.mde.state.md.us/programs/Water/TMDL/Integrated303dReports/Documents/Assessment_Methodologies/Biological_Listing_Methodology-wadeablestreams_2014_Final%20\(New%20links\).pdf](http://www.mde.state.md.us/programs/Water/TMDL/Integrated303dReports/Documents/Assessment_Methodologies/Biological_Listing_Methodology-wadeablestreams_2014_Final%20(New%20links).pdf)
- _____. 2015. *Watershed Report for Biological Impairment of the Marsh Run Watershed in Washington County, Maryland Biological Stressor Identification Analysis Results and Interpretation*. Baltimore, MD: Maryland Department of the Environment. Also available at:
http://www.mde.maryland.gov/programs/Water/TMDL/Documents/BSID_Reports/Marsh_Run_BSID_final_080715.pdf
- _____. 2018a. *2018 Integrated Report of Surface Water Quality in Maryland*. Baltimore, MD: Maryland Department of the Environment. Also available at:
<http://www.mde.maryland.gov/programs/Water/TMDL/Integrated303dReports/Pages/2018IR.aspx>
- _____. 2015. Maryland Department of the Environment National Pollutant Discharge Elimination System Municipal Separate Storm Sewer System Discharge Permit (Permit Number: 11-DP-3313 MD0068276; MS4 system owned and operated by SHA in all MD Phase I and Phase II Jurisdictions, Maryland).

FINAL

http://mde.maryland.gov/programs/Water/StormwaterManagementProgram/Documents/SHA%20Final%20Permit%20complete%2010_9_2015.pdf (Accessed May, 2018).

MDE, MDDNR, MDA (Maryland Department of Agriculture), MDP (Maryland Department of Planning), DBM (Maryland Department of Budget and Management). 2018. *Historical and Projected Chesapeake Bay Restoration Spending: A Report to the Maryland General Assembly pursuant to the 2015 Joint Chairman's Report* – page 225. Page 10.

MGS (Maryland Geological Survey). 2012. *A Brief Description of the Geology of Maryland*. <http://www.mgs.md.gov/esic/brochures/mdgeology.html>

NRCS (Natural Resources Conservation Service). 2003. Soil Survey of Washington County, Maryland. Natural Resources Conservation Service United States Department of Agriculture, Natural Resources Conservation Service, in cooperation with the Board of County Commissioners of Washington County, Maryland; Washington County Soil Conservation District; and Maryland Agricultural Experiment Station (University of Maryland). Also available at: https://www.nrcs.usda.gov/Internet/FSE_MANUSCRIPTS/maryland/washingtonMD2003/washingtonMD2003_1.pdf
https://www.nrcs.usda.gov/Internet/FSE_MANUSCRIPTS/maryland/washingtonMD2003/washingtonMD2003_2.pdf

Nusser, S. M., and J. J. Goebel. 1997. The National Resources Inventory: A Long-Term Multi-Resource Monitoring Program. *Environmental and Ecological Statistics* 4: 181-204.

Roth, N., M. T. Southerland, J. C. Chaillou, R. Klauda, P. F. Kazyak, S. A. Stranko, S. Weisberg, L. Hall Jr., and R. Morgan II. 1998. Maryland Biological Stream Survey: Development of a Fish Index of Biotic Integrity. *Environmental Management and Assessment* 51: 89-106.

Roth, N. E., M. T. Southerland, J. C. Chaillou, P. F. Kazyak, and S. A. Stranko. 2000. *Refinement and Validation of a Fish Index of Biotic Integrity for Maryland Streams*. Columbia, MD: Versar, Inc. with Maryland Department of Natural Resources, Monitoring and Assessment Division.

Roth, N. E., M. T. Southerland, J. C. Chaillou, G. M. Rogers, and J. H. Volstad. 2005. *Maryland Biological Stream Survey 2000-2004: Volume IV: Ecological Assessment of Watersheds Sampled in 2003*. Columbia, MD: Versar, Inc. with Maryland Department of Natural Resources, Monitoring and Assessment Division.

Southerland, M. T., G. M. Rogers, R. J. Kline, R. P. Morgan, D. M. Boward, P. F. Kazyak, R. J. Klauda and S. A. Stranko. 2005. *New biological indicators to better assess the condition of Maryland Streams*. Columbia, MD: Versar, Inc. with Maryland Department of Natural Resources, Monitoring and Assessment Division.

FINAL

CBWP-MANTA-EA-05-13. Available at
http://www.dnr.state.md.us/streams/pubs/ea-05-13_new_ibi.pdf

Stribling, J. B., B. K. Jessup, J. S. White, D. Boward, and M. Hurd. 1998. *Development of a Benthic Index of Biotic Integrity for Maryland Streams*. Owings Mills, MD: Tetra Tech, Inc. with Maryland Department of Natural Resources, Monitoring and Assessment Program.

US Census Bureau. 2010. *2010 Census*. Washington, DC: US Census Bureau.

USDA (United States Department of Agriculture). 1982. *1982 Census of Agriculture*. Washington, DC: United States Department of Agriculture.

_____. 1983. Sediment Sources, Yields, and Delivery Ratios. In *National Engineering Handbook, Section 3, Sedimentation*. Washington, DC: United States Department of Agriculture, Natural Resources Conservation Service.

_____. 1987. *1987 Census of Agriculture*. Washington, DC: United States Department of Agriculture.

_____. 1992. *1992 Census of Agriculture*. Washington, DC: United States Department of Agriculture.

_____. 1997. *1997 Census of Agriculture*. Washington, DC: United States Department of Agriculture.

_____. 2002. *2002 Census of Agriculture*. Washington, DC: United States Department of Agriculture.

_____. 2006. *State Soil Geographic (STATSGO) Database for Maryland*. Washington, DC: United States Department of Agriculture, Natural Resources Conservation Service. Also available at
<http://websoilsurvey.sc.egov.usda.gov/App/HomePage.htm>.

USEPA (U.S. Environmental Protection Agency). 1991. Technical Support Document (TSD) for Water Quality-based Toxics Control. Washington, DC: U.S. Environmental Protection Agency. Also available at:
<https://www3.epa.gov/npdes/pubs/owm0264.pdf>

_____. 2002. *Establishing Total Maximum Daily Load (TMDL) Wasteload Allocations (WLAs) for Storm Water Sources and NPDES Permit Requirements Based on Those WLAs*. Washington, DC: U.S. Environmental Protection Agency.

_____. 2004. *Agricultural BMP Descriptions as Defined for the Chesapeake Bay Program Watershed Model*. Annapolis, MD: U.S. Environmental Protection Agency with Chesapeake Bay Program.

FINAL

_____. 2006. Framework for Developing Suspended and Bedded Sediments (SABS) Water Quality Criteria. USEPA Science Advisory Board Consultation, EPA Office of Water, Office of Science and Technology, May 2006.

_____. 2007. *Options for the Expression of Daily Loads in TMDLs*. Washington, DC: U.S. Environmental Protection Agency. Also available at: https://www.epa.gov/sites/production/files/2015-07/documents/2007_06_26_tmdl_draft_daily_loads_tech.pdf

_____. 2010a. *Chesapeake Bay Total Maximum Daily Load for Nitrogen, Phosphorus, and Sediment*. Annapolis, MD: U.S. Environmental Protection Agency, Chesapeake Bay Program Office. Also available at: <https://www.epa.gov/chesapeake-bay-tmdl/chesapeake-bay-tmdl-document>

_____. 2010b. *Chesapeake Bay Phase 5.3 Community Watershed Model*. Annapolis, MD: U.S. Environmental Protection Agency, Chesapeake Bay Program Office. Also available at: http://www.chesapeakebay.net/what/programs/modeling/phase_5.3_watershed_model

_____. 2014. *Revisions to the November 22, 2002 Memorandum "Establishing Total Maximum Daily Load (TMDL) Wasteload Allocations (WLAs) for Storm Water Sources and NPDES Permit Requirements Based on Those LAs"*. Washington, DC: U.S. Environmental Protection Agency.

APPENDIX A – Watershed Characterization Data

Table A-1: Reference Watersheds in the Piedmont/Highland Physiographic Regions

MD 8-Name	MD 8-digit	Physiographic Ecoregion	Use Class Designations	Percent Stream Mile BIBI/FIBI < 3.0 (%) ^{1,2}	Forest Normalized Sediment Load ³
Big Elk Creek	02130606	Piedmont	I-P	12.5	7.8
Brighton Dam	02131108	Piedmont	III-P, IV-P	10.0	3.0
Broad Creek	02120205	Piedmont	I-P, III-P	10.5	3.4
Deer Creek	02120202	Piedmont	III-P, IV-P	10.2	3.6
Fifteen Mile Creek	02140511	Highland	III-P, IV-P	6.7	1.7
Furnace Bay	02130609	Piedmont	I-P, II, III	10	6.6
Little Gunpowder Falls	02130804	Piedmont	I, II, III	13.3	3.8
Middle Patuxent River	02131106	Piedmont	IV-P	18.8	2.5
Northeast River	02130608	Piedmont	I, I-P, II	15.7	9.2
Octoraro Creek	02120203	Piedmont	I, III-P, IV-P	7.7	8.3
Savage River	02141006	Highland	III-P	4.9	2.7
Median					3.6
75th percentile					7.2

- Notes:**
- ¹ Percent stream mile is based on the percentage of MBSS stations with BIBI and/or FIBI scores significantly lower than 3.0 within the watershed (MDE 2014a).
 - ² The threshold to determine if an 8-digit watershed is impaired for impacts to biological communities (IBI<3.0), is based on a comparison to reference conditions (MDE 2014a).
 - ³ Forest normalized sediment loads based on Maryland watershed area only (consistent with MBSS random monitoring data).

APPENDIX B – Technical Approach Used to Generate Maximum Daily Loads

Summary

This appendix documents the technical approach used to define maximum daily loads (MDLs) of sediment consistent with the average annual TMDL in the Marsh Run watershed, which is considered the maximum allowable load the watershed can sustain and support aquatic life. The approach builds upon the modeling analysis that was conducted to determine the sediment loadings and can be summarized as follows.

- The approach defines MDLs for each of the source categories.
- The approach builds upon the TMDL modeling analysis that was conducted to ensure that average annual loading targets are at a level that support aquatic life.
- The approach converts daily time-series loadings into TMDL values in a manner that is consistent with available USEPA guidance on generating daily loads for TMDLs (USEPA 2007).
- The approach considers a daily load level of a resolution based on the specific data that exists for each source category.

Introduction

This appendix documents the development and application of the approach used to define MDL values. It is divided into sections discussing:

- Basis for approach
- Options considered
- Selected approach
- Results of approach

Basis for approach

The overall approach for the development of daily loads was based upon the following factors:

- **Average Annual TMDL:** The basis of the average annual sediment TMDL is that cumulative high sediment loading rates have negative impacts on the biological community. Thus, the average annual sediment load was calculated so as to ensure the support of aquatic life.
- **CBP P5.3.2 Watershed Model Sediment Loads:** As described in Section 2.2, the nonpoint source sediment loads from the Marsh Run watershed are based on EOS loads from the CBP P5.3.2 watershed model. The CBP P5.3.2 model river segments were calibrated to daily monitoring information for watersheds with a flow greater than 100 cubic feet per second (cfs), or an approximate area of 100 square miles.

FINAL

- **Draft USEPA guidance document entitled “Developing Daily Loads for Load-based TMDLs”:** This guidance document provides options for defining MDLs when using TMDL approaches that generate daily output (USEPA 2007).

The rationale for developing TMDLs expressed as *daily* loads was to accept the existing average annual TMDL, but then develop a method for converting this number to a MDL in a manner consistent with USEPA guidance and available information.

Options considered

The draft USEPA guidance document for developing daily loads does not specify a single approach that must be adhered to, but rather it contains a range of acceptable options (USEPA 2007). The selection of a specific method for translating a time-series of allowable loads into the expression of a TMDL requires decisions regarding both the level of resolution (e.g., single daily load for all conditions vs. loads that vary with environmental conditions) and level of probability associated with the TMDL.

This section describes the range of options that were considered when developing methods to calculate Marsh Run watershed MDLs.

Level of Resolution

The level of resolution pertains to the amount of detail used in specifying the MDL. The draft USEPA guidance document on daily loads provides three categories of options for level of resolution, all of which are potentially applicable for the Marsh Run watershed:

1. **Representative daily load:** In this option, a single daily load (or multiple representative daily loads) is specified that covers all time periods and environmental conditions.
2. **Variable daily load:** This option allows the MDL to vary as function of a particular characteristic that affects loading or waterbody response, such as flow or season.

Probability Level

All TMDLs have some probability of being exceeded, with the specific probability being either explicitly specified or implicitly assumed. This level of probability directly or indirectly reflects two separate phenomena:

1. Water quality criteria consist of components describing acceptable magnitude, duration, and frequency. The frequency component addresses how often conditions can allowably surpass the combined magnitude and duration components.
2. Pollutant loads, especially from wet weather sources, typically exhibit a large degree of variability over time. It is rarely practical to specify a “never to be exceeded value” for a daily load, as essentially any loading value has some finite probability of being exceeded.

FINAL

The draft daily load guidance document states that the probability component of the MDL should be based on a representative statistical measure that is dependent upon the specific TMDL and the best professional judgment of the developers (USEPA 2007). This statistical measure represents how often the MDL is expected/allowed to be exceeded. The primary options for selecting this level of protection would be:

1. **The maximum daily load reflects some central tendency:** In this option, the MDL is based upon the mean or median value of the range of loads expected to occur. The variability in the actual loads is not addressed.
2. **The maximum daily load is a value that will be exceeded with a pre-defined probability:** In this option, a “reasonable” upper bound percentile is selected for the MDL based upon a characterization of the variability of daily loads. For example, selection of the 95th percentile value would result in a MDL that would be exceeded 5% of the time.
3. **The maximum daily load reflects a level of protection implicitly provided by the selection of some “critical” period:** In this option, the MDL is based upon the allowable load that is predicted to occur during some critical period examined during the analysis. The developer does not explicitly specify the probability of occurrence.

Selected Approach

The approach selected for defining an Marsh Run Watershed MDL was based upon the specific data that exists for each source category. The approach consists of unique methods for each of the following categories of sources:

- Approach for Nonpoint Sources and Stormwater Point Sources within the Marsh Run watershed
- Approach for Wastewater Point Sources within the Marsh Run watershed

Approach for Nonpoint Sources and Stormwater Point Sources within the Marsh Run Watershed

The level of resolution selected for the Marsh Run MDL was a representative daily load, expressed as a single daily load for each loading source. This approach was chosen based upon the specific data that exists for nonpoint sources and stormwater point sources within the Marsh Run watershed. Currently, the best available data is the CBP P5.3.2 model daily time series calibrated to long-term average annual loads (per land-use). The CBP reach simulation results are calibrated to daily monitoring information for watershed segments with a flow typically greater than 100 cfs.

The probability level selected for the Marsh Run MDL was a pre-defined exceedance probability. Based on the USEPA guidance, “in the case where a long term daily load dataset is available, in which multiple years of data and a variety of environmental conditions are represented, it is preferable to select a maximum daily load as a percentile

FINAL

of the load distribution. A sufficiently long-term dataset allows for minimizing error associated with the fact that the daily load dataset might not exactly match a normal or lognormal distribution” (USEPA 2007). The exact percentile value to be used should be determined by the TMDL developer, based on site specific characteristics.

This CBP P5.3.2 model output provides a time series of daily TSS loads from the Marsh Run watershed, covering a 20-year period from 1985 to 2005. Because this is a long-term time series, it captures a broad range of meteorological and hydrological conditions and also minimizes the effect of potential statistical variances. As with the calculation of the TMDL value, environmentally conservative principles are also used in the MDL calculation. A 95th percentile flow was selected for the MDL, meaning that there is a 5% probability that daily loads will exceed this value. This percentile was chosen rather the 99th (which is also considered acceptable based on USEPA), in order to avoid the influence of extreme weather events and statistical outliers. Since the model daily time series represents the current (baseline) condition, the reduction percentage applied to each sector of the TMDL, was applied directly to the 95th percentile values to calculate the final MDL value.

*MDL = 95th percentile of daily load series values * Reduction % from TMDL*

(Eq B-1)

Where:

MDL = Maximum Daily Load, ton/day

Daily load series values = CBP 5.3.2 output

TMDL = Long term average annual load, ton/yr

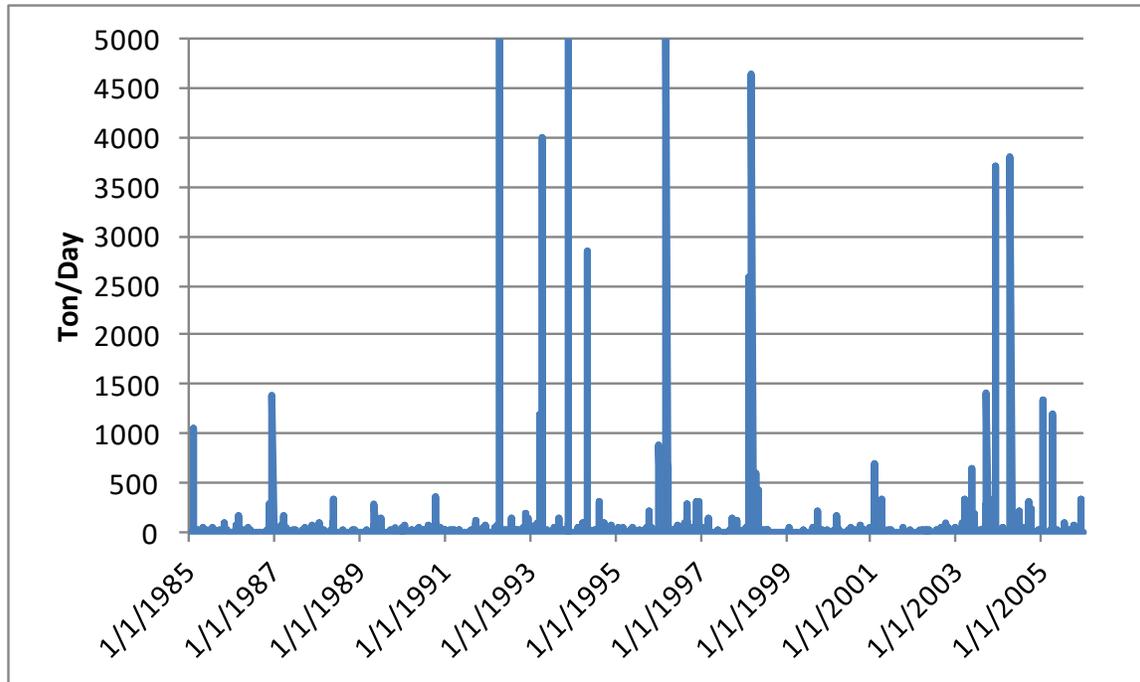


Figure B-1: Daily Time Series of CBP River Segment Daily Simulation Results for the Marsh Run Watershed

Approach for Wastewater Point Sources within the Marsh Run Watershed

The TMDL also considers contributions from other point sources (i.e., sources other than stormwater point sources) in the watershed that have NPDES permits with sediment limits. As these sources are generally minor contributors to the overall sediment load, the TMDL analysis that defined the average annual TMDL did not propose any reductions for these sources and held each of them constant at their existing technology-based NPDES permit monthly (or daily if monthly was not specified) limit for the entire year.

The approach used to determine MDLs for these sources was dependent upon whether a maximum daily limit was specified within the permit. If a maximum daily limit was specified, then the reported average flow was multiplied by the daily maximum limit and a conversion factor of 0.0042 to obtain an MDL in ton/day. If a maximum daily limit was not specified, the MDLs were calculated based on the guidance provided in the Technical Support Document (TSD) for Water Quality-based Toxics Control (USEPA 1991). The long-term average annual TMDL was converted to maximum daily limits using Table 5-2 of the TSD assuming a coefficient of variation of 0.6 and a 99th percentile probability. This results in a dimensionless multiplication factor of 3.11. The average annual Marsh Run TMDL of sediment/TSS is reported in ton/yr, and the conversion from ton/yr to a MDL in ton/day is 0.0085 (e.g. 3.11/365).

Results of approach

This section lists the results of the selected approach to define the Marsh Run MDLs. The final results are presented in Table B-1.

- Calculation Approach for Nonpoint Sources and Stormwater Point Sources within the Marsh Run Watershed

The MDL for Nonpoint Sources and Stormwater Point Sources within the Marsh Run Watershed is based upon the 95th percentile value of the CBP P5.3.2 model daily load time series, reduced by the same percentage as the corresponding TMDL value. The 95th percentile load of the daily times series is 9.1 tons/day and with a TMDL reduction of 31%, it results in a total watershed MDL of 6.3 tons/day. The total MDL is subdivided in accordance with the same ratios present in the TMDL.

- Calculation Approach for Wastewater Point Sources within the Marsh Run Watershed
 - There are no wastewater point sources with TSS limits in the Marsh Run watershed.

Table B-1: Marsh Run Watershed Maximum Daily Loads of Sediment/TSS (ton/day)

MDL (ton/day)	=	L_{AMR}	+	NPDES Stormwater WL_{AMR}	+	Wastewater WL_{AMR}	+	MOS
6.3	=	5.8	+	0.5	+	0	+	Implicit