RESPONSE AND DEVELOPMENT WORK PLAN

AREA B: SUB-PARCEL B1-2 LOGISTICS CENTERS XI & XII TRADEPOINT ATLANTIC SPARROWS POINT, MARYLAND

Prepared For:



ENVIROANALYTICS GROUP

1515 Des Peres Road, Suite 300 Saint Louis, Missouri 63131

Prepared By:



ARM GROUP INC.

9175 Guilford Road Suite 310 Columbia, Maryland 21046

ARM Project No. 160443M-18

Respectfully Submitted,

Melissa Replogle

Melissa A. Replogle, E.I.T.

Staff Engineer

T. Neil Peters, P.E. Senior Vice President

Revision 3 – August 30, 2019

TABLE OF CONTENTS

1.0	Introd	uction	1
2.0	Site D	escription and History	4
2.1.	Site	Description	4
2.2.	Site	History	4
3.0	Enviro	onmental Site Assessment Results	6
3.1.	Pha	se I Environmental Site Assessment Results	6
3.2.	Pha	se II Investigation Results	7
3.	.2.1.	Soil Investigation Findings	8
3.	.2.2.	Groundwater Investigation Findings	10
3.	.2.3.	Identification of Locations of Potential Concern	11
3.3.	Hur	nan Health Screening Level Risk Assessment	14
3.	.3.1.	Analysis Process	14
3.	.3.2.	Sub-Parcel B1-2 SLRA Results and Risk Characterization	18
3.	.3.3.	Evaluation of Comprehensive Environmental Response, Compensation,	and
L	iability	Act (CERCLA) Criteria	22
4.0	Propos	sed Site Development Plan	26
4.1.	Res	ponse Phase – Groundwater Abandonments	27
4.2.	Dev	relopment Phase	28
4.	.2.1.	Erosion and Sediment Control Installation	28
4.	.2.2.	Grading and Site Preparation	28
4.	.2.3.	Installation of Structures and Underground Utilities	28
4.	.2.4.	Floor Slabs and Paving	29
4.	.2.5.	Landscaping	29
4.	.2.6.	Stormwater Management	29
5.0	Devel	opment Implementation Protocols	31
5.1.	Dev	relopment Phase	31
5.	.1.1.	Erosion/Sediment Control	32
5.	.1.2.	Soil Excavation and Utility Trenching	32
5.	.1.3.	Soil Sampling and Disposal	34
5.	.1.4.	Fill	34
5.	.1.5.	Clay Liner Installation (if applicable)	35
5.	.1.6.	Dust Control	36
5.2.	Wat	ter Management	37
5.	.2.1.	Groundwater PAL Exceedances	37
5.	.2.2.	Dewatering	37
5.3.	Hea	lth and Safety	39
5.4.	Inst	itutional Controls (Future Land Use Controls)	39



TABLE OF CONTENTS (CONT.)

5.5. Po	ost Remediation Requirements	40
	onstruction Oversight	
	nits, Notifications and Contingencies	
	ementation Schedule	
	FIGURES	
Figure 1	Area A & B Parcels	Following Text
Figure 2	Sub-Parcel B1-2: Development Area	Following Text
Figure 3	Soil Boring Locations	Following Text
Figure 4	Soil Boring NAPL Screening Buffer (100 ft)	Following Text
Figure S1	Soil SVOC PAL Exceedances	Following Text
Figure S2	Soil PCB PAL Exceedances	Following Text
Figure S3	Soil Inorganic PAL Exceedances	Following Text
Figure 5	Shallow Groundwater Sample Locations	Following Text
Figure GW	1 Groundwater PAL Exceedances (all classes)	Following Text
Figure 6	Locations of Potential Concern	Following Text
Figure 7	B5-098-SB NAPL Delineation Results	Following Text
Figure 8	Risk Assessment Exposure Units	Following Text
Figure 9	Groundwater Network Abandonment	Following Text
	TABLES	
Table 1	Summary of Organics Detected in Soil	Following Text
Table 2	Summary of Inorganics Detected in Soil	•
Table 3	Summary of Organics Detected in Groundwater	Following Text
Table 4	Summary of Inorganics Detected in Groundwater	
Table 5	COPC Screening Analysis	Following Text
Table 6	Assessment of Lead	Following Text
Table 7	Soil Exposure Point Concentrations	Following Text
Table 8	Risk Ratios – Composite Worker Surface Soil	Following Text
Table 9	Risk Ratios – Composite Worker Sub-Surface Soil	Following Text
Table 10	Risk Ratios – Composite Worker Pooled Soil	Following Text
Table 11	Risk Ratios – Construction Worker Surface Soil	Following Text
Table 12	Risk Ratios – Construction Worker Sub-Surface Soil	Following Text
Table 13	Risk Ratios – Construction Worker Pooled Soil	Following Text



TABLE OF CONTENTS (CONT.)

APPENDICES

Appendix A	Request Letter from Tradepoint Atlantic	Following Text
Appendix B	Summary of Organics and Inorganics Detected in Soil	
	(NAPL Screening Locations)	Following Text
Appendix C	Select Soil Boring and Piezometer Logs	Following Text
Appendix D	Construction Worker SSLs – Calculation Spreadsheet	Following Text
Appendix E	Development Plan Drawings	Following Text
Appendix F	Capping Section Details	Following Text
Appendix G	Utility Trench Section Detail	Following Text
Appendix H	Utility Excavation NAPL Contingency Plan	Following Text
Appendix I	Health and Safety Plan	Following Text
Appendix J	Personal Protective Equipment Standard Operational Procedure	Following Text

ELECTRONIC ATTACHMENTS

Soil Laboratory Certificates of Analysis	Electronic Attachment
Soil Data Validation Reports	Electronic Attachment
Groundwater Laboratory Certificates of Analysis I	Electronic Attachment
Groundwater Data Validation Reports	Electronic Attachment
ProUCL Input Tables (formatted soil analytical data) I	Electronic Attachment
ProUCL Output Tables	Electronic Attachment
Lead Evaluation Spreadsheet	Electronic Attachment



1.0 INTRODUCTION

ARM Group Inc. (ARM), on behalf of EnviroAnalytics Group (EAG), has prepared this Response and Development Work Plan (RADWP) for a portion of the Tradepoint Atlantic property that has been designated as Area B: Sub-Parcel B1-2 (the Site). Tradepoint Atlantic submitted a letter (**Appendix A**) requesting an expedited remedial plan review to achieve construction deadlines for the proposed development on this Site. The proposed development of Sub-Parcel B1-2 will include permanent improvements on approximately 106 acres of land intended for occupancy in the eastern portion of Parcel B1, northwestern portion of Parcel B2, and northwestern portion of Parcel B5 (**Figure 1**). Outside of the main development area designated as Sub-Parcel B1-2, easements with a total area of approximately 0.4 acres within the construction Limit of Disturbance (LOD) will be utilized to install a rail spur and subgrade utilities for the project.

The conduct of any environmental assessment and cleanup activities on the Tradepoint Atlantic property, as well as any associated development, is subject to the requirements outlined in the following agreements:

- Administrative Consent Order (ACO) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the Maryland Department of the Environment (MDE), effective September 12, 2014; and
- Settlement Agreement and Covenant Not to Sue (SA) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the United States Environmental Protection Agency (USEPA), effective November 25, 2014.

Sub-Parcel B1-2 is part of the acreage that was removed (Carveout Area) from inclusion in the Multimedia Consent Decree between Bethlehem Steel Corporation, the USEPA, and the MDE (effective October 8, 1997) as documented in correspondence received from USEPA on September 12, 2014. Based on this agreement, USEPA determined that no further investigation or corrective measures will be required under the terms of the Consent Decree for the Carveout Area. However, the SA reflects that the property within the Carveout Area will remain subject to the USEPA's Resource Conservation and Recovery Act (RCRA) Corrective Action authorities.

An application to enter the full Tradepoint Atlantic property (3,100 acres) into the Maryland Department of the Environment Voluntary Cleanup Program (MDE-VCP) was submitted to the MDE and delivered on June 27, 2014. The property's current and anticipated future use is Tier 3 (Industrial), and plans for the property include demolition and redevelopment over several years.

In consultation with the MDE, Tradepoint Atlantic affirms that it desires to accelerate the assessment, remediation and redevelopment of certain sub-parcels within the larger site due to current market conditions. To that end, the MDE and Tradepoint Atlantic agree that the Controlled Hazardous Substance (CHS) Act (Section 7-222 of the Environment Article) and the CHS



Response Plan (Code of Maryland Regulations (COMAR) 26.14.02) shall serve as the governing statutory and regulatory authority for completing the development on the Sub-Parcel B1-2 and complement the statutory requirements of the VCP (Section 7-501 of the Environment Article). Upon submission of a Site RADWP and completion of any remedial activities for the sub-parcel, the MDE shall issue a No Further Action Letter (NFA) upon a recordation of an environmental covenant describing any necessary land use controls for the specific sub-parcel. At such time that all the sub-parcels within the larger parcel have completed remedial activities, Tradepoint Atlantic shall submit to the MDE a request for issuing a Certificate of Completion (COC) as well as all pertinent information concerning completion of remedial activities conducted on the parcel. Once the VCP has completed its review of the submitted information it shall issue a COC for the entire parcel described in Tradepoint Atlantic's VCP application.

Alternatively, Tradepoint Atlantic or other entity may elect to submit an application for a specific sub-parcel and submit it to the VCP for review and acceptance. If the application is received after the cleanup and redevelopment activities described in this RADWP are implemented and a NFA is issued by the MDE pursuant to the CHS Act, the VCP shall prepare a No Further Requirements Determination for the sub-parcel.

If Tradepoint Atlantic or other entity has not carried out cleanup and redevelopment activities described in the RADWP, the cleanup and redevelopment activities may be conducted under the oversight authority of either the VCP or the CHS Act, so long as those activities comport with this RADWP.

The Site consists of approximately 106 acres of land slated for development and occupancy. The proposed development will include the construction of two warehouse buildings designated as Logistics Centers XI and XII, along with exterior support areas (parking, access drives, etc.). The proposed layout of the development area is shown on **Figure 2**. Outside of the main development area, easements with a total area of approximately 0.4 acres (within the LOD) will be utilized to install a rail spur and subgrade utilities for the project. The temporary work outside of the boundary of the Site is not intended to be the basis for the issuance of a NFA or a COC, although the scope of construction work is covered by this RADWP.

This RADWP provides a Site description and history; summary of environmental conditions identified by the Phase I Environmental Site Assessment (ESA); summary of relevant findings and environmental conditions identified by the Parcel B1 Phase II Investigation, Parcel B2 Phase II Investigation, Parcel B5 Phase II Investigation, and Area B Groundwater Investigation; a human health Screening Level Risk Assessment (SLRA) conducted for the identified conditions; and any necessary engineering and/or institutional controls to facilitate the planned development and address the impacts and potential human health exposures. These controls include work practices and applicable protocols that are submitted for approval to support the development and use of the Site. Engineering/institutional controls approved and installed for this RADWP shall be described



Tradepoint Atlantic EnviroAnalytics Group

in closure certification documentation submitted to the MDE demonstrating that exposure pathways on the Site are addressed in a manner that protects public health and the environment. The remaining acreage of Parcel B1, Parcel B2 and Parcel B5 will be addressed in future work associated with completion of the obligations of the ACO and associated VCP requirements. This work will include assessments of risk and, if necessary, RADWPs to address risks associated with future land use.



2.0 SITE DESCRIPTION AND HISTORY

2.1. SITE DESCRIPTION

Parcel B1, Parcel B2, and Parcel B5 include areas of 217 acres, 123 acres, and 305 acres, respectively as shown on **Figure 1**. The Sub-Parcel B1-2 Development Area consists of approximately 106 acres intended for occupancy in the eastern portion of Parcel B1, northwestern portion of Parcel B2, and northwestern portion of Parcel B5 which will include two warehouses totaling approximately 1,500,000 square feet and exterior parking lots and roads (**Figure 2**). Outside of the main development area designated as Sub-Parcel B1-2, easements with a total area of approximately 0.4 acres (within the construction LOD) will be utilized to install a rail spur and subgrade utilities for the project. The Site is currently zoned Manufacturing Heavy-Industrial Major (MH-IM), and is not occupied. All historical buildings have been demolished, and the Site has been cleared of all significant vegetation. There is no groundwater use on-site or within the surrounding Tradepoint Atlantic property.

According to Figure B-2 of the Stormwater Pollution Prevention Plan (SWPPP) Revision 6 dated February 22, 2018, stormwater from the Site is discharged in several directions toward permitted National Pollution Discharge Elimination System (NPDES) Outfalls. Stormwater from the northwestern portion of the Site is diverted to the north and west through permitted NPDES Outfalls 013 and 014 (Humphrey Creek Wastewater Treatment Plant; HCWWTP) to the surface waters of Bear Creek. Stormwater from the southeastern portion of the Site is diverted to the east through permitted NPDES Outfalls 017 and 001 (Pennwood Canal) to the surface waters of Jones Creek and Old Road Bay, respectively.

2.2. SITE HISTORY

From the late 1800s until 2012, the production and manufacturing of steel was conducted at Sparrows Point. Iron and steel production operations and processes at Sparrows Point included raw material handling, coke production, sinter production, iron production, steel production, and semi-finished and finished product preparation. In 1970, Sparrows Point was the largest steel facility in the United States, producing hot and cold rolled sheets, coated materials, pipes, plates, and rod and wire. The steel making operations at the facility ceased in fall 2012.

As stated above, the Site encompasses portions of Parcel B1, Parcel B2, and Parcel B5. There were no significant industrial operations conducted in the portion of Parcel B2 covered by this RADWP. A small slab storage area was located in the northwestern portion of Parcel B2. The portion of Parcel B1 occupied by the Site included a large section of the Primary Rolling Mills Area, while the portion of Parcel B5 was formerly occupied by the Open Hearth Furnace Area (which also extended into the southern portion of Parcel B1). Both of these areas contained multiple iron and steel industrial work processes including material heating furnaces, soaking pits,



Tradepoint Atlantic EnviroAnalytics Group

descaling operations, storage yards (Mould Yard), and rolling and coiling operations. More information regarding the historical activities in each area can be found in the agency approved Phase II Investigation Work Plans for Parcel B1 (Revision 3 dated March 3, 2016), Parcel B2 (Revision 1 dated May 17, 2017), and Parcel B5 (Revision 1 dated December 3, 2015).



3.0 ENVIRONMENTAL SITE ASSESSMENT RESULTS

3.1. PHASE I ENVIRONMENTAL SITE ASSESSMENT RESULTS

A Phase I ESA was completed by Weaver Boos Consultants for the Sparrows Point property on May 19, 2014. Weaver Boos completed site visits of Sparrows Point from February 19 through 21, 2014, for the purpose of characterizing current conditions at the former plant. The Phase I ESA identified features across the Tradepoint Atlantic property which presented potential risks to the environment. These Recognized Environmental Conditions (RECs) included buildings and process areas where releases of hazardous substances and/or petroleum products potentially may have occurred. The Phase I ESA also relied upon findings identified during a previous visual site inspection (VSI) conducted as part of the RCRA Facility Assessment (RFA) prepared by A.T. Kearney, Inc. dated August 1993, for the purpose of identifying Solid Waste Management Units (SWMUs) and Areas of Concern (AOCs) on the property. This 1991 VSI is regularly cited in the Description of Current Conditions (DCC) Report prepared by Rust Environment and Infrastructure, dated January 1998 (included with Weaver Boos' Phase I ESA).

Weaver Boos' distinction of a REC or Non-REC was based upon the findings of the DCC Report (which was prepared when the features remained on-site in 1998) or on observations of the general area during their site visit. Weaver Boos made the determination to identify a feature as a REC based on historical information, observations during the site visit, and prior knowledge and experience with similar facilities. The following RECs were identified within, or in close proximity to, the Sub-Parcel B1-2 boundary:

Former Electrical Repair Shop (ERS) Oily Wastewater Tank (REC 8A, Finding 199):

REC 8A consisted of a steel aboveground tank of unknown capacity located to the north of the ERS in the Open Hearth Furnace Area. Electrical motors were occasionally steam cleaned, and the wash waters were sent to the tank. Oil was separated and sent to Palm Oil Recovery, Inc. (PORI) (SWMUs 71 through 73). The tank was removed during the late 1980's or early 1990's.

Waste Oil Stabilization/Packing Area (REC 9A, Finding 233):

REC 9A consisted of a concrete pad, a soil/gravel area, and 28 dumpsters. The unit received drums of waste oil from around the property. The waste oil was typically contaminated with soil, speedy dry, and grease. Upon arrival, the drums were transported to the dumpsters and emptied. The oil within the dumpsters was then mixed with lime and/or soil to stabilize it. The concrete pad was described as severely cracked and stained in the RFA Report.

Rolling Mills Impoundment (REC 9B, Finding 238):

REC 9B was recognized in the DCC report from a 1952 aerial photograph. Weaver Boos observed this area to be vacant during the site visit, but speculated that hazardous substances and/or petroleum products may have been present in the impoundment based on experience and historical source information.



Relevant SWMUs and AOCs were also identified as located in Figure 3-1 from the DCC Report. This figure generally shows the SWMUs, AOCs, and main facility areas within the property boundaries. The following SWMUs and AOCs were identified within, or in close proximity to, the Sub-Parcel B1-2 boundary:

PCB-contaminated Oil Spill (AOC C):

AOC C describes a previous PCB-contaminated oil release which occurred when a PCB-containing transformer was struck by a vehicle. Approximately 20 gallons of PCB-contaminated oil was released to a soil area of approximately 15 feet by 20 feet in dimension. After soil removal, samples were collected from the spill area, and PCB concentrations in the soil were below the applicable USEPA guidelines.

Former Slab Cut-off Spill Area (AOC F):

At AOC F, approximately 30 gallons of hydraulic oil were spilled on February 5, 1990. The oil discharged to the ground within the Slabbing Mill, between the Slab Yard and the Soaking Pits. The surface soil remained oil-stained during a VSI in 1991.

Former Diesel Fuel Spill Area (AOC G):

At the location of AOC G, waste oil was applied to the road surface for dust control on the west side of Slab Haul Road. Approximately 50 tons of soils were removed during remediation efforts, and several thin layers of asphalt were observed during the removal. This suggested that the waste oil application was actually several asphalt paving events.

RCRA Regulated Storage Area (SWMU 193):

SWMU 193 was identified as containing drums of chromic acid, mercury, and antimony trichloride during the 1991 VSI. The RCRA Regulated Storage Area was located inside the former Skelp Mill building. This facility may have been the only RCRA permitted unit at the Bethlehem Steel Corporation property.

3.2. PHASE II INVESTIGATION RESULTS

Phase II Investigations specific to soil and groundwater conditions were performed for the areas covering Sub-Parcel B1-2 in accordance with the requirements outlined in the ACO as further described in the following agency-approved Phase II Investigation Work Plans:

- Area B: Parcel B1 (Revision 3) dated March 3, 2016.
- Area B: Parcel B2 (Revision 1) dated May 17, 2017; and subsequent comment response letter dated June 14, 2017.
- Area B: Parcel B5 (Revision 1) dated December 3, 2015.
- Area B Groundwater Investigation (Revision 3) dated October 6, 2015.



All soil and groundwater samples were collected and analyzed in accordance with agency-approved protocols during these Phase II Investigations, the specific details of which can be reviewed in each agency-approved Work Plan. Each Phase II Investigation was developed to target specific features which represented a potential release of hazardous substances and/or petroleum products to the environment, including RECs, SWMUs, and AOCs as well as numerous other targets defined from former operations that would have the potential for environmental contamination. Samples were also collected at site-wide locations to ensure full coverage of each investigation area. The full analytical results and conclusions of each investigation have been presented to the agencies in the following Phase II Investigation Reports:

- Area B: Parcel B1 (Revision 1) dated August 7, 2019.
- Area B: Parcel B2 (Revision 2) dated October 12, 2018.
- Area B: Parcel B5 (Revision 3) dated July 8, 2019.
- Area B Groundwater Investigation (Revision 0) dated September 30, 2016.

This RADWP summarizes the relevant soil and groundwater findings from these Phase II Investigations, with respect to the proposed development of Sub-Parcel B1-2. Regarding the easements located outside of the Site boundary, a limited dataset obtained from Parcel B23 is also relevant for the evaluation of soil data along the easements. Although the easements themselves will not extend into Parcel B23, soil and groundwater data obtained near the parcel boundary has been included for discussion within this RADWP. The Parcel B23 Phase II Investigation was completed in accordance with the approved Phase II Investigation Work Plan (Revision 0) dated July 24, 2018 and a subsequent comment response letter dated November 2, 2018. The findings of the Parcel B23 Phase II Investigation have not yet been formally presented to the agencies.

3.2.1. Soil Investigation Findings

Based on the scope of development for Sub-Parcel B1-2 (106 acres), including the easements outside of the Site boundary (0.4 acres), 163 soil samples collected from 85 soil borings during the various Phase II Investigations identified in the preceding section were selected for a representative evaluation of the Site. The 85 boring locations are shown on **Figure 3**, and the samples obtained from these borings provided relevant analytical data for discussion of on-site conditions. The majority of the identified borings are located within the proposed development area such that the data from these borings should be considered representative of potential exposures during development within Sub-Parcel B1-2; however, to supplement data along the easements, several borings located outside but in close proximity to the easements have also been included and are considered to be representative of the soil conditions along these alignments.

Soil samples collected during the various Phase II Investigations were analyzed for the USEPA Target Compound List (TCL) semi-volatile organic compounds (SVOCs), TCL volatile organic



compounds (VOCs), total petroleum hydrocarbon (TPH) diesel range organics (DRO) and gasoline range organics (GRO), Oil & Grease, USEPA Target Analyte List (TAL) metals, hexavalent chromium, and/or cyanide based on the parcel-specific sampling plans for Parcel B1, Parcel B2, Parcel B5, and Parcel B23 (relevant only for the easements). Shallow soil samples (0 to 1 foot bgs) were also analyzed for polychlorinated biphenyls (PCBs). The specific requirements for parameter analyses have varied over time and can be reviewed in each agency-approved Work Plan. The relevant laboratory Certificates of Analysis (including Chains of Custody) and Data Validation Reports (50+% validated soil data) are included as electronic attachments. The Data Validation Reports contain qualifier keys for the flags assigned to individual results in the attached summary tables.

Soil sample results relevant for the Sub-Parcel B1-2 Development Area and associated easements were screened against the Project Action Limits (PALs) established in the property-wide Quality Assurance Project Plan (QAPP) dated April 5, 2016, or based on other direct agency guidance (e.g., TPH/Oil & Grease). Table 1 and Table 2 provide a summary of the detected organic compounds and inorganics in the soil samples collected from the 85 soil borings that are most relevant for evaluating soil conditions at the Site. Figure S1 through Figure S3 present summaries of the soil sample results that exceeded the PALs among these 85 soil borings. The PALs for relevant polynuclear aromatic hydrocarbons (PAHs) have been adjusted upward based on revised toxicity data published in the USEPA Regional Screening Level (RSL) Composite Worker Soil Table. PAL exceedances in the soil samples relevant for the proposed development project were limited to six inorganics (antimony, arsenic, manganese, lead, vanadium, and hexavalent chromium). **SVOCs** (benz[a]anthracene, benzo[a]pyrene, benzo[b]fluoranthene, dibenz[a,h]anthracene, and naphthalene), and two PCB aroclors (Aroclor 1254 and Aroclor 1260 (as well as total PCBs).

An additional 27 soil borings outside the development area were included as secondary locations to evaluate the potential presence of non-aqueous phase liquid (NAPL) in close proximity to the Site. These 27 soil borings are highlighted on **Figure 4**. The purpose of these additional soil borings was to provide a conservative screening method to determine the potential presence of NAPL at the Site, which could be indicated through the presence of free product, sheen, or elevated concentrations of TPH-DRO/GRO and/or Oil & Grease. These 27 soil borings have been included primarily for NAPL screening purposes, and the analytical data obtained from these borings is not included in the SLRA because a sufficient soil dataset is already available within the Site boundary. **Appendix B** provides summary tables for the organic compounds and inorganics detected in the 27 soil borings that were completed within the conservative NAPL screening buffer. These analytical detections are provided for reference.

No soil samples collected inside the Site boundary exceeded the PAL for TPH/Oil & Grease (6,200 mg/kg). Two soil samples located within the NAPL screening buffer shown on **Figure 4** (B5-099-SB-4.5 and B5-161-SB-4) had elevated detections of TPH-DRO above the PAL. These analytical



exceedances are highlighted in **Appendix B**. In addition, potential evidence of NAPL was observed at several soil boring locations within, and in close proximity, to the Site which are relevant for the proposed development project. These findings are further discussed in Section 3.2.3, and contingency measures to address the potential presence of NAPL which could be encountered during construction are addressed in subsequent sections of this RADWP.

3.2.2. Groundwater Investigation Findings

Groundwater conditions were investigated in accordance with the separate Area B Groundwater Investigation Work Plan. During this groundwater investigation, 12 shallow monitoring wells were sampled within a reasonable proximity to Sub-Parcel B1-2 and its associated easements. A limited amount of groundwater data was also available from the separate Parcel B2 and Parcel B23 Phase II Investigations (one relevant groundwater sample was collected from a temporary groundwater sample collection point during each investigation). The 14 shallow groundwater points which provided relevant analytical data for the proposed development project are shown on **Figure 5**. Groundwater conditions below the Site are not a significant concern because there is no use of groundwater on the Tradepoint Atlantic property; however, groundwater may be encountered in the sub-parcel during some construction tasks.

The shallow groundwater samples were analyzed for TCL-SVOCs, TLC-VOCs, TAL-dissolved/total metals, TPH-DRO/GRO, Oil & Grease, hexavalent chromium, total/available cyanide, and/or PCBs based on the project-specific sampling plans. The specific requirements for parameter analyses have varied over time, and can be reviewed in each agency-approved Work Plan. The relevant laboratory Certificates of Analysis (including Chains of Custody) and Data Validation Reports (50+% validated groundwater data) are included as electronic attachments. The Data Validation Reports contain qualifier keys for the flags assigned to individual results in the attached summary tables.

The groundwater results relevant for the Sub-Parcel B1-2 Development Area and associated easements were screened against the PALs established in the property-wide QAPP dated April 5, 2016, or based on other direct agency guidance (e.g., TPH/Oil & Grease). **Table 3** and **Table 4** provide a summary of the detected organic compounds and inorganics in the groundwater samples submitted for laboratory analysis. **Figure GW1** presents a combined summary, with all classes of compounds, of the shallow groundwater results that exceeded the PALs. The tables and figure include all locations and analytical data relevant for the proposed development project. Similar to the evaluation of soil data, the PALs for relevant PAHs have been adjusted upward based on revised toxicity data published in the USEPA RSL Resident Tapwater Table. Groundwater PAL exceedances in the vicinity of the proposed development project consisted of one VOC (chloroform), three SVOCs (1,4-dioxane, benz[a]anthracene, and naphthalene), TPH-DRO and Oil & Grease, and four total/dissolved metals (hexavalent chromium, cobalt, manganese, and vanadium). For simplicity, the inorganic PAL exceedances shown on **Figure GW1** do not include



duplicate exceedances of total/dissolved metals. If both total and dissolved concentrations exceeded the PAL, the value for the total metals is displayed.

While concentrations of these constituents did exceed the aqueous PALs specified in the QAPP, none of the detected levels were significantly elevated and there were no concerns related to potential vapor intrusion (VI) risks. Total cyanide had previously been identified as a potential VI risk in the Area B Groundwater Phase II Investigation Report, but the screening level for cyanide has since been adjusted upward by the USEPA, eliminating this concern. Each groundwater collection point was also inspected for evidence of NAPL using an oil-water interface probe prior to sampling. None of the piezometers or wells relevant for the proposed development project showed evidence of NAPL during these checks. If groundwater is encountered during development, it will be managed to prevent exposures in accordance with the dewatering requirements outlined in Section 5.2.

3.2.3. Identification of Locations of Potential Concern

As noted above, there were no concerns related to potential VI risks with respect to the Phase II Investigation groundwater data obtained at the Site, and none of the monitoring wells or piezometers included in the preceding groundwater investigations exhibited evidence of NAPL. Lead, PCBs, and TPH/Oil & Grease in soil are subject to special requirements as designated by the agencies. The soil data relevant for this evaluation of Sub-Parcel B1-2 were evaluated to determine the presence of any locations of potential concern including: lead concentrations above 10,000 mg/kg, PCB concentrations above 50 mg/kg, TPH/Oil & Grease concentrations above 6,200 mg/kg, and/or evidence of NAPL. In addition, anomalously high concentrations of any compound at a given location could cause the associated soil boring to be identified as a location of potential concern. This final category is based primarily on previous reviews of Phase II Investigation Reports and feedback received from the MDE and/or USEPA.

There were no concentrations of total PCBs detected in soil above 50 mg/kg at the Site; therefore, PCBs are not contaminants of concern. There was one soil sample with a notable concentration of lead (B1-051-SB-5 with a detection of 12,300 mg/kg), one soil sample with a notable concentration of hexavalent chromium (B1-117-SB-4.5 with a detection of 555 mg/kg), and one soil sample with a notable concentration of antimony (B5-068-SB-1 with a detection of 1,680 mg/kg). Several soil borings located inside the Site boundary or within the conservative NAPL-screening buffer had soil samples with notable concentrations of TPH-DRO (detections exceeding 6,200 mg/kg) and/or physical evidence of NAPL in the soil cores, including B1-088-SB, B5-097-SB, B5-098-SB, B5-103-SB, B5-161-SB. A temporary NAPL screening piezometer was installed at each identified location to investigate the potential presence and mobility of NAPL in groundwater. The soil boring logs and piezometer construction logs from these locations with potential NAPL impacts have been included as **Appendix C**.



Each of the identified locations of potential concern were previously covered by the Logistics Centers Grading Plan for Logistics Centers XI & XII dated November 2, 2018 (which was developed for preparatory grading work associated with this development project). **Figure 6** provides a summary of all soil borings that were identified by this screening evaluation as locations of potential concern at the Site, each of which is further discussed below:

Notable Detection of Lead

During the Parcel B1 Phase II Investigation, a lead concentration of 12,300 mg/kg was observed at location B1-051-SB in the intermediate soil sample (from the 4 to 5 foot interval) as shown on **Figure 6**. This elevated concentration of lead is located in the area between the proposed warehouses identified as Logistics Centers XI and XII. Delineation of lead has been completed at this location in accordance with the Work Plan for Delineation/Characterization of Lead Impacted Soil dated February 15, 2018. None of the lead results obtained during the delineation investigation were comparable to the initial elevated result of 12,300 mg/kg. Given the lack of high concentrations of lead detected during the delineation, and the proposed future use of the Site, the lead impacts in this area do not appear to represent a significant exposure risk and no further action was proposed. Following review of the delineation results (presented in the Supplemental Investigation Report dated December 20, 2018), the agencies have agreed that no further action is warranted with respect to the impacts at this location.

Notable Detection of Hexavalent Chromium

During the Parcel B1 Phase II Investigation, a hexavalent chromium concentration of 555 mg/kg was observed at location B1-117-SB in the intermediate soil sample (from the 3.5 to 4.5 foot interval) as shown on **Figure 6**. This elevated concentration of hexavalent chromium is located outside of the proposed warehouse identified as Logistics Center XI under a proposed road/parking area. Following their review of the Parcel B1 Phase II Investigation Report, the MDE required that an additional investigation be completed to delineate the extent of the hexavalent chromium contamination. Delineation has since been completed at this location in accordance with the Work Plan for Delineation/Characterization of Hexavalent Chromium Impacted Soil dated April 19, 2018. None of the hexavalent chromium results obtained during the delineation investigation were comparable to the initial elevated result of 555 mg/kg. Given the lack of high concentrations of hexavalent chromium detected during the delineation, and the proposed future use of the Site, the impacts in this area do not appear to represent a significant exposure risk and no further action was proposed. Following review of the delineation results (presented in the Supplemental Investigation Report dated February 26, 2019), the agencies have agreed that no further action is warranted with respect to the impacts at this location.

Notable Detection of Antimony

During the Parcel B5 Phase II Investigation, an antimony concentration of 1,680 mg/kg was observed at location B5-068-SB in the shallow soil sample (from the 0 to 1 foot interval) as shown



on **Figure 6**. This elevated concentration of antimony is located outside of the proposed warehouse identified as Logistics Center XII under a proposed parking area. Following their review of the Parcel B5 Phase II Investigation Report, the MDE commented that this maximum detection of antimony was notably higher than other detections in the parcel. The MDE suggested that the area may require additional delineation, depending on the future development plan for this area. Given the proposed future use of this area as a parking lot, as well as the placement of fill over this area during site grading (the grade will be raised and ultimately capped by pavement), the antimony impacts in this area do not appear to represent a significant exposure risk for future workers and no further action is proposed at this time.

Notable Detections of TPH-DRO and/or NAPL

Soil borings that had elevated concentrations of TPH-DRO and/or visual observations of NAPL in the soil cores (free product or sheen) have been identified on **Figure 6** and are evaluated herein. A temporary NAPL screening piezometer was installed at each identified location to investigate the potential presence and mobility of NAPL in groundwater. The soil boring logs and piezometer construction logs for these locations have been included as **Appendix C**. It is notable that the proposed southwestern stormwater management pond is located in relatively close proximity to several soil borings that were identified as locations of potential concern with respect to TPH-DRO and/or NAPL. Soil screening will be especially important during any excavation of existing soil in this area. Contingency measures to address the potential presence of NAPL which could be encountered during construction are addressed in subsequent sections of this RADWP.

Each identified location is further discussed in its respective Phase II Investigation Report, but the specific findings at each location can be summarized as follows:

- Soil boring B1-088-SB (located below the proposed Logistics Center XII warehouse) had visual observations of a sheen in the soil core. Due to these observations, a temporary piezometer was installed at this location. NAPL was not detected in the piezometer during the 0-hour, 48-hour, and 30-day gauging measurements. There were no elevated concentrations of TPH/Oil & Grease detected in the soil samples from this location. Since the evidence of NAPL in the soil core was limited to a sheen, and based on the completed gauging events which did not detect NAPL, no additional action is proposed in this area.
- Soil boring B5-097-SB (located in a proposed parking area outside of the Logistics Center XII warehouse) had visual observations of NAPL in the soil core. Due to these observations, a temporary piezometer was installed at this location. NAPL was not detected in the piezometer during the 0-hour, 48-hour, and 30-day gauging measurements. There were no elevated concentrations of TPH/Oil & Grease detected in the soil samples from this location. Based on the completed gauging events which did not detect NAPL, no additional action is proposed in this area.



- Soil borings B5-098-SB and B5-099-SB are positioned in the immediate vicinity of each other (located outside of the proposed LOD but in close proximity). Both borings had visual observations of NAPL in the soil cores, and B5-099-SB also exhibited an elevated concentration of TPH-DRO of 7,780 mg/kg in the sample collected from 3.5 to 4.5 feet bgs. Due to these observations, a temporary piezometer was installed at each location. NAPL was later detected in the piezometer installed at B5-098-SB, and additional soil borings and piezometers were installed in the area during a subsequent delineation investigation. The delineation has been completed at this time (final 30-day gauging measurements were collected on October 26, 2018), and the majority of the NAPL mass is positioned outside of the LOD. The NAPL impacts do not extend below the footprint of Logistics Center XII. The NAPL delineation area is shown on **Figure 7**. Since the impacts are primarily located outside of the LOD, and there do not appear to be any utilities located in close proximity to the Site boundary, no additional action is proposed in this area.
- Soil boring B5-103-SB (located outside of the proposed LOD but in close proximity) had visual observations of NAPL in the soil core. Due to these observations, a temporary piezometer was installed at this location. NAPL was not detected in the piezometer during the 0-hour, 48-hour, and 30-day gauging measurements. There were no elevated concentrations of TPH/Oil & Grease detected in the soil samples from this location. Since this location is located outside of the LOD, and based on the completed gauging events which did not detect NAPL, no additional action is proposed in this area.
- Soil boring B5-161-SB (located outside of the proposed LOD but in close proximity) did not have physical evidence of NAPL in the soil core but exhibited an elevated concentration of TPH-DRO of 17,900 mg/kg in the sample collected from 3 to 4 feet bgs. Due to the elevated analytical detection, a temporary piezometer was installed at this location. NAPL was not detected in the piezometer during the 0-hour, 48-hour, and 30-day gauging measurements. Since this location is located outside of the LOD, and based on the completed gauging events which did not detect NAPL, no additional action is proposed in this area with respect to the Sub-Parcel B1-2 development plan.

3.3. HUMAN HEALTH SCREENING LEVEL RISK ASSESSMENT

3.3.1. Analysis Process

A baseline human health Screening Level Risk Assessment (SLRA) has been completed based on the analytical data obtained from the characterization of surface and subsurface soils in Sub-Parcel B1-2 and along the easements. It should be noted that processed slag aggregate sourced from the Tradepoint Atlantic property will be used as the primary fill material for this project; therefore, regardless of the findings of the Composite Worker baseline assessment, Sub-Parcel B1-2 will be subject to surface engineering controls (i.e., capping) unless separate approvals are received from the MDE following appropriate laboratory testing of the slag aggregate material. The SLRA was



conducted to further evaluate the existing soil conditions prior to the placement of the processed slag aggregate in support of the design of any additional response measures.

Two supplemental delineation investigations have been completed within the Site boundary, as described in Section 3.2.3. These included a soil lead delineation surrounding B1-051-SB and a soil hexavalent chromium delineation surrounding B1-117-SB. The complete results of both delineation investigations have been provided to the agencies under separate cover. In both cases, the soil results obtained during the delineation investigations were significantly lower than the original result obtained during the Phase II Investigations that initiated the delineation. Therefore, as a conservatism, the initial elevated results have been included in the SLRA, and the delineation results (which were significantly lower) have been excluded.

The SLRA included the following evaluation process:

Identification of Exposure Units (EUs): The Composite Worker SLRA was evaluated using two Exposure Units (EU1 and EU2) with areas of 60.8 acres and 45.1 acres, respectively. EU1 and EU2 correspond to the boundaries of Logistics Centers XI and XII. The Construction Worker SLRA was evaluated using the same two EUs with a slight modification to EU1. EU1 is slightly larger for the Construction Worker evaluation (61.2 acres) versus the Composite Worker evaluation (60.8 acres) due to the inclusion of the utility/rail easements at the northeast corner of the Site (0.4 acres). This Construction Worker EU has been designated as EU1-EXP to recognize the slightly larger area. The boundary of EU2 (45.1 acres) is identical for both the Composite Worker and Construction Worker evaluation. The SLRA EUs for the Composite Worker (EU1 and EU2) and Construction Worker (EU1-EXP and EU2) are shown in relation to the proposed development area and the 85 applicable soil borings on Figure 8. Six soil borings (B2-006-SB, B2-041-SB, B2-063-SB, B2-068-SB, B23-013-SB, and B23-029-SB) positioned along the utility/rail easements were not included in EU1 for the Composite Worker evaluation but were included in EU1-EXP for the Construction Worker evaluation.

Identification of Constituents of Potential Concern (COPCs): For the project-specific SLRA, compounds that were present at concentrations at or above the USEPA RSLs set at a target cancer risk of 1E-6 or target non-cancer Hazard Quotient (HQ) of 0.1 were identified as COPCs to be included in the SLRA. A COPC screening analysis is provided in **Table 5** to identify compounds above the relevant screening levels.

All aroclor mixtures (e.g., Aroclor 1242, Aroclor 1260) are taken into account for the reported concentrations of total PCBs. The total PCBs concentrations are used to evaluate the carcinogenic risk associated with PCBs. Aroclor 1254, which is included in the total PCBs summation for the carcinogenic risk estimate, is also evaluated separately for systemic toxicity (i.e., non-cancer hazard).



If the detection frequency of an analyte is less than 5% in a dataset with a minimum of 20 samples, the COPC can be eliminated from the risk assessment assuming the detections are not extremely high (based on agency discretion). A single detection that is extremely high could require delineation rather than elimination. No analyte designated as a COPC in the development LOD had a detection frequency less than 5%; thus, no COPCs were removed due to low detection frequencies.

Exposure Point Concentrations (EPCs): The COPC soil datasets for each EU were divided into surface (0 to 1 foot), subsurface (>1 foot), and pooled depths for estimation of potential EPCs. Thus, there are three soil datasets associated with each EU. A statistical analysis was performed for each COPC dataset using the ProUCL software (version 5.0) developed by the USEPA to determine representative reasonable maximum exposure (RME) values for the EPC for each constituent. The RME value is typically the 95% Upper Confidence Limit (UCL) of the mean. For lead, the arithmetic mean for each depth was calculated for comparison to the Adult Lead Model (ALM)-based values, and any individual results exceeding 10,000 mg/kg would be delineated for possible excavation and removal (if applicable). For PCBs, all results equaling or exceeding 50 mg/kg would be delineated for excavation and removal (if applicable).

Risk Ratios: The surface soil EPCs, subsurface soil EPCs, and pooled soil EPCs were compared to the USEPA RSLs for the Composite Worker and to site-specific Soil Screening Levels (SSLs) for the Construction Worker based on equations derived in the USEPA Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites (OSWER 9355.4-24, December 2002). Risk ratios were calculated with a cancer risk of 1E-6 and a non-cancer HQ of 1. The risk ratios for the carcinogens were summed to develop a screening level estimate of the baseline cumulative cancer risk. The risk ratios for the non-carcinogens were segregated and summed by target organ to develop a screening level estimate of the baseline cumulative non-cancer hazard.

For the Construction Worker, site-specific risk-based evaluations were completed for a range of potential exposure frequencies to determine the maximum exposure frequency for each EU that would result in risk ratios equivalent to a cumulative cancer risk of 1E-5 or Hazard Index (HI) of 1 for the individual target organs. This analysis indicated that the allowable exposure frequencies before additional worker protections or more detailed job safety evaluations might be needed are 80 days and 85 days for EU1-EXP and EU2, respectively.

There is no potential for human exposure to groundwater for a Composite Worker since groundwater is not used on the Tradepoint Atlantic property (and is not proposed to be utilized). In the event that construction/excavation leads to a potential Construction



Worker exposure to groundwater during development, health and safety plans and management procedures shall be followed to limit exposure risk.

Assessment of Lead: For lead, the arithmetic mean concentrations for surface soils, subsurface soils, and pooled soils for each EU were compared to the applicable RSL (800 mg/kg) as an initial screening. If the mean concentrations for the EU were below the applicable RSL, the EU was identified as requiring no further action for lead. If a mean concentration exceeded the RSL, the mean values were compared to calculated ALM values (ALM Version dated 6/21/2009 updated with the 5/17/2017 OLEM Directive) with inputs of 1.8 for the geometric standard deviation and a blood baseline lead level of 0.6 ug/dL. The ALM calculation generates a soil lead concentration of 2,518 mg/kg, which is the most conservative (i.e., lowest) concentration which would yield a probability of 5% of a blood lead concentration of 10 ug/dL. If the arithmetic mean concentrations for the EU were below 2,518 mg/kg, the EU was identified as requiring no further action for lead. The lead averages and ALM screening levels are presented for surface, subsurface, and pooled soils in **Table 6**. For lead, any results equaling or exceeding 10,000 mg/kg would warrant additional delineation for possible excavation and removal (see below).

Assessment of TPH-DRO/GRO and Oil & Grease: EPCs were not calculated for TPH-DRO/GRO or Oil & Grease. Instead, the individual results were compared to the PAL set to a HQ of 1 (6,200 mg/kg). No soil samples collected inside the Site boundary exceeded the PAL for TPH/Oil & Grease, although elevated concentrations of TPH-DRO were documented in B5-099-SB and B5-161-SB which are located in close proximity beyond the western Site boundary. Potential evidence of NAPL was observed at several soil boring locations within, and in close proximity, to the Site which are relevant for the proposed development. These findings are further discussed in Section 3.2.3. The soil borings with physical evidence of NAPL and/or elevated TPH-DRO concentrations are plotted with respect to the proposed development plan (including utilities) on **Figure 6**. Contingency measures to address the potential presence of NAPL which could be encountered during construction are addressed in subsequent sections of this RADWP.

Risk Characterization Approach: Generally, if the baseline risk ratio for each non-carcinogenic COPC or cumulative target organ does not exceed 1 (with the exception of lead), and the sum of the risk ratios for the carcinogenic COPCs does not exceed a cumulative cancer risk of 1E-5, then a no further action determination will be recommended. If the baseline estimate of cumulative cancer risk exceeds 1E-5 but is less than or equal to 1E-4, then capping of the EU will be considered to be an acceptable remedy for the Composite Worker. For the Construction Worker, cumulative cancer risks exceeding 1E-5, but less than or equal to 1E-4, will be mitigated via site-specific health and safety requirements. The efficacy of capping for elevated non-cancer hazard will be



evaluated in terms of the magnitude of exceedance and other factors such as bioavailability of the COPC.

Due to the major grading activities including cut and fill planned at the Site (covered by the Logistics Centers Grading Plan dated November 2, 2018), the SLRA was evaluated to determine baseline Composite and Construction Worker exposures to surface, subsurface, and pooled data. It should be noted that processed slag aggregate sourced from the Tradepoint Atlantic property will be used as the primary fill material for this project; therefore, regardless of the findings of the Composite Worker baseline assessment, Sub-Parcel B1-2 will be subject to surface engineering controls (i.e., capping) unless separate approvals are received from the MDE following appropriate laboratory testing of the slag aggregate material. The goal of the SLRA is therefore to determine whether additional response actions beyond capping may be needed due to current conditions at the Site.

The USEPA's acceptable risk range is between 1E-6 and 1E-4. If the sum of the risk ratios for carcinogens exceeds a cumulative cancer risk of 1E-4, further analysis of site conditions will be required including the consideration of toxicity reduction in any proposal for a remedy. The magnitude of any non-carcinogen HI exceedances and bioavailability of the COPC will also dictate further analysis of site conditions including consideration of toxicity reduction in any proposal for a remedy. For lead, if the ALM results indicate that the mean concentrations would present a 5% to 10% probability of a blood concentration of 10 ug/dL for the EU, then capping of the EU would be an acceptable presumptive remedy. The mean soil lead concentrations corresponding to ALM probabilities of 5% and 10% are 2,518 mg/kg, and 3,216 mg/kg, respectively. If the ALM indicates that the mean concentrations would present a >10% probability of a blood concentration of 10 ug/dL for the EU, further analysis of site conditions including toxicity reduction will be completed such that the probability would be reduced to less than 10% after toxicity reduction, but before capping.

3.3.2. Sub-Parcel B1-2 SLRA Results and Risk Characterization

Soil data were divided into three datasets (surface, subsurface, and pooled) for Sub-Parcel B1-2 to evaluate potential exposure scenarios. Due to the major grading activities including cut and fill planned at the Site (covered by the Logistics Centers Grading Plan dated November 2, 2018), each of these potential exposure scenarios is relevant for both the Composite and Construction Worker.

EPCs were calculated for each soil exposure dataset (i.e., surface, subsurface, and pooled surface/subsurface) in each EU. ProUCL output tables (with computed UCLs) derived from the data for each COPC in soils are provided as electronic attachments, with computations presented and EPCs calculated for COPCs within each of the three datasets. The ProUCL input tables are also included as electronic attachments. The results were evaluated to identify any samples that may require additional assessment or special management based on the risk characterization



approach. The calculated EPCs for the surface, subsurface, and pooled exposure scenarios are provided in **Table 7**.

As indicated above, the EPCs for lead are the average (i.e., arithmetic mean) values for each dataset. A lead evaluation spreadsheet, providing the computations used to determine lead averages for each dataset in each EU is also included as an electronic attachment. The average lead concentrations are presented for each dataset in **Table 6**, which indicates that neither surface, subsurface, nor pooled soils exceeded an average lead value of 800 mg/kg in any EU. The screening criterion for lead was set at an EU arithmetic mean of 800 mg/kg based on the RSL, with a secondary limit of 2,518 mg/kg based on the May 2017 updated ALM developed by the USEPA (corresponding to a 5% probability of a blood lead level of 10 ug/dL). There was one soil sample which exceeded 10,000 mg/kg of lead. As described in Section 3.2.3, a lead concentration of 12,300 mg/kg was detected in B1-051-SB-5 during the Parcel B1 Phase II Investigation. Delineation of lead was completed in this area in accordance with the Work Plan for Delineation/Characterization of Lead Impacted Soil dated February 15, 2018. Following review of the analytical results (presented within the Supplemental Investigation Report dated December 20, 2018), the agencies have agreed that no further action is warranted with respect to the lead impacts at this location. The initial elevated result of 12,300 mg/kg has been included in this SLRA as a conservatism, and the delineation results (which were significantly lower than the original result) have been excluded.

As described in Section 3.2.3, the MDE required that an additional investigation be completed to delineate the extent of the hexavalent chromium soil contamination in the vicinity of B1-117-SB. An elevated concentration of hexavalent chromium (555 mg/kg) was observed at this location in the intermediate sample B1-117-SB-4.5. Delineation of hexavalent chromium has since been completed at this location in accordance with the Work Plan for Delineation/Characterization of Hexavalent Chromium Impacted Soil dated April 19, 2018. Following review of the analytical results (presented within the Supplemental Investigation Report dated February 26, 2019), the agencies have agreed that no further action is warranted with respect to the hexavalent chromium impacts at this location. The initial elevated result of 555 mg/kg has been included in this SLRA as a conservatism, and the delineation results (which were significantly lower than the original result) have been excluded.

None of the detections of PCBs included in the project-specific SLRA evaluation exceeded the mandatory excavation criterion of 50 mg/kg.

Composite Worker Assessment:

Risk ratios for the estimates of potential EPCs for the Composite Worker baseline scenario prior to the placement of slag aggregate at the Site are shown in **Table 8** (surface), **Table 9** (subsurface), and **Table 10** (pooled soils). The results are summarized as follows:



Worker Scenario	Exposure Unit	Medium	Hazard Index (>1)	Total Cancer Risk
		Surface Soil	none	1E-5
	EU1	Subsurface Soil	none	5E-5
Composite		Surface & Subsurface Soil	none	1E-5
Worker		Surface Soil	none	3E-5
	EU2	Subsurface Soil	none	1E-5
		Surface & Subsurface Soil	none	3E-5

Based on the risk ratios for Sub-Parcel B1-2, the proposed environmental capping (100% of the Site) is an acceptable remedy to be protective of future Composite Workers for the surface, subsurface, and pooled exposure scenarios. None of the carcinogenic risk estimates for the Composite Worker were greater than 1E-4, indicating that the proposed capping remedy will provide adequate protection from carcinogens in the soil. None of the non-carcinogenic HI values exceeded 1. Capping and institutional controls (to maintain the integrity of the cap) are suitable measures for the protection of the future Composite Worker for both cancer risks and non-cancer hazards. The capping remedy will additionally be protective of slag aggregate which will be used as the primary fill material at the Site.

Construction Worker Assessment:

According to the work schedule provided by Tradepoint Atlantic, intrusive activities which could result in potential Construction Worker exposure risks are expected to be limited to three primary utility installation tasks:

• Domestic Water/Fire Loop: 120 exposure days estimated

• Sanitary: 120 exposure days estimated

• Stormwater: 96 exposure days estimated

Although the anticipated work period may be subject to change (see schedule in Section 7.0), the duration of these activities is not expected to increase. Each of these primary intrusive work tasks will be performed by a separate work crew. Construction Worker risks were evaluated for several exposure scenarios to determine the maximum exposure frequency for each EU that would result in risk ratios equivalent to a cumulative cancer risk above 1E-5 or HI of 1 for any individual target organ. Risk ratios for the estimates of potential EPCs for the Construction Worker scenario using the selected exposure durations (80 and 85 work days for EU1-EXP and EU2, respectively) are shown in **Table 11** (surface), **Table 12** (subsurface), and **Table 13** (pooled soils). The variables entered for calculation of site-specific Construction Worker SSLs (EU area, input assumptions, and exposure frequency) are indicated as notes on the tables. The spreadsheet used for computation of the site-specific Construction Worker SSLs is included in **Appendix D**. The results are summarized as follows:



Worker Scenario	Exposure Unit	Medium	Hazard Index (>1)	Total Cancer Risk
	EU1-EXP (80 exposure days)	Surface Soil	none	6E-7
		Subsurface Soil	none	3E-6
Construction		Surface & Subsurface Soil	none	1E-6
Worker	E112	Surface Soil	none	2E-6
	EU2 (85 exposure days)	Subsurface Soil	none	1E-6
		Surface & Subsurface Soil	none	2E-6

Using the 80-day exposure duration for EU1-EXP and the 85-day exposure duration for EU2, the carcinogenic risks were all less than 1E-5, and none of the non-carcinogens caused a cumulative HI to exceed 1 for any target organ system. These findings are below the acceptable limits for no further action established by the agencies. This evaluation indicates that site-specific health and safety protocols or further action would be required only if 80 exposure days or 85 exposure days were exceeded for an individual worker in EU1-EXP and EU2, respectively.

Certain activities at the Site (utility installations for specific crews as noted above) are anticipated to exceed these allowable durations, and Construction Worker risks must be mitigated to facilitate the proposed construction work. Additional site-specific health and safety requirements are warranted to be protective of workers. Upgraded Personal Protective Equipment (PPE) beyond standard Level D protection will be used for the entire scope of work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied during this project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE Standard Operational Procedure (SOP) provided as **Appendix J**.

Institutional controls will be required to be established for the protection of future Construction Workers in the event of any future long-term development which could include intrusive activities. These institutional controls will need to include a written notice to the MDE and USEPA at least 30 days prior to any future soil disturbances if the proposed duration of intrusive activity exposure would exceed the allowable duration determined in the SLRA for that EU (unless the contractor is proposing to use the upgraded modified Level D PPE specified in the approved SOP), health and safety requirements for any excavations, and proper management and characterization of any removed material.



3.3.3. Evaluation of Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) Criteria

Results from the SLRA indicate that a site-wide remedy of capping with institutional controls will be acceptable to mitigate potential current and future Composite Worker risks. Site-specific health and safety controls will be required to mitigate Construction Worker risks within the sub-parcel. This includes using modified Level D PPE. The modified Level D PPE requirements will be implemented throughout the project duration in accordance with the PPE SOP provided as **Appendix J**. Institutional controls will be required to be established for the protection of future Construction Workers in the event of any future long-term development which could include intrusive activities.

The proposed VCP capping remedy (with institutional controls) for Sub-Parcel B1-2 was evaluated for consistency with the CERCLA Threshold Criteria and the Balancing Criteria. The Threshold Criteria assess the overall protection of human health and the environment, as well as achievement of media cleanup objectives and control of sources of releases at the Site. The Balancing Criteria assess long-term effectiveness and permanence; reduction of toxicity, mobility or volume; short-term effectiveness; implementability; cost effectiveness; and community and State acceptance.

Threshold Criteria:

Protect Human Health and the Environment: The assessment against this criterion evaluates how the remedy, as a whole, protects and maintains protection of human health and the environment. This criterion is satisfied when response actions are complete. The purpose of this remedy is to provide a protective barrier between human site users and impacted materials, and to protect the environment by preventing surface water from contacting potentially impacted materials in place. The capping and institutional control remedy would eliminate risk to current and future industrial workers by preventing exposure to areas of the Site where processed slag aggregate has been placed or where soil concentrations exceed a cancer risk of 1E-5 or a HI of 1. Groundwater does not present a human health hazard since there is no groundwater use. Implementation of the proposed use restrictions will address the residual risk and will also protect hypothetical future Construction Workers by eliminating or controlling potential exposure pathways, thus, reducing potential intake and contact of soil/groundwater COPCs by human receptors.

Achieve Media Cleanup Objective: The assessment against this criterion describes how the remedy meets the cleanup objective, which is risk reduction, appropriate for the expected current and reasonably anticipated future land use. The objective is to protect current/future Composite Workers and Construction Workers from potential exposures to constituents present in slag aggregate or soil at levels that may result in risks of adverse health effects. Given the controlled access and use restrictions, the proposed remedy will



attain soil and groundwater objectives. The activity use restrictions will eliminate current and future unacceptable exposures to both soil and groundwater.

Control the Source of Releases: In its RCRA Corrective Action proposed remedies, USEPA seeks to eliminate or reduce further releases of hazardous wastes or hazardous constituents that may pose a threat to human health and the environment. Controlling the sources of contamination relates to the ability of the proposed remedy to reduce or eliminate, to the maximum extent practicable, further releases. Sampling results did not indicate localized, discernible source areas associated with the soil conditions observed at the Site, with the possible exception of NAPL at select soil boring locations (see Section 3.2.3). The proposed capping remedy will prevent contact with COPCs potentially present in the soil or slag aggregate, reducing potential risks for future industrial workers. The control measures included in the proposed remedy, such as Materials Management Plan requirements and groundwater use restrictions, provide a mechanism to control and reduce potential further releases of COPCs. This is achieved by eliminating the potential for groundwater use and requiring proper planning associated with intrusive activities.

Balancing Criteria:

Long-Term Reliability and Effectiveness: The assessment against this criterion evaluates the long-term effectiveness of the remedy in maintaining protection of human health and the environment after the response objectives have been met. The primary focus of this criterion is the extent and effectiveness of the controls that may be required to manage the risk posed by slag aggregate, treatment residuals and/or untreated wastes. The capping remedy will permanently contain the slag aggregate and other potentially contaminated media in place. In order for the cap to effectively act as a barrier, regular inspections will be required to determine if erosion or cracks have formed that could expose workers to contaminated materials.

Institutional controls (deed restrictions) will be implemented to protect future Composite and Construction Workers against inadvertent contact with potentially impacted media. These institutional controls are anticipated to include a restriction prohibiting the use of groundwater for any purpose, a written notice to the MDE and USEPA at least 30 days prior to any future soil disturbances if the proposed duration of intrusive activity exposure would exceed the allowable duration determined in the SLRA for that EU (unless the contractor is proposing to use the upgraded modified Level D PPE specified in the approved SOP), health and safety requirements for any excavations, and proper management and characterization of any removed material. The Tenant will be required to sign onto the Environmental Covenant with restriction in the NFA. The proposed remedy will maintain protection of human health and the environment over time by controlling exposures to the hazardous constituents potentially remaining in slag aggregate or existing on-site media. The long-term effectiveness is high, as use restrictions are



readily implementable and easily maintained. Given the historical, heavily industrial uses of the Site and the surrounding area, including the presence of landfills, land and groundwater use restrictions are expected to continue in the long term.

Reduction of Toxicity, Mobility, or Volume of Waste: The assessment against this criterion evaluates the anticipated performance of specific technologies that a remedial action alternative may employ. The capping remedy will prevent the spread of contaminants in wind-blown dust or stormwater and will prevent infiltration through the unsaturated zone from carrying contaminants to the groundwater. Thus, the mobility of contaminants will be reduced by the capping remedy.

Short-term Effectiveness: The assessment against this criterion examines how well the proposed remedy protects human health and the environment during the construction and implementation until response objectives have been met. This criterion also includes an estimate of the time required to achieve protection for either the entire site or individual elements associated with specific site areas or threats. The risks to the Construction Worker during remedy implementation are mitigated by implementing site-specific health and safety requirements including upgraded PPE. The short-term risk to site workers following appropriate health and safety measures during implementation of the remedy will be low, leading to a high level of short-term effectiveness for protection of future site users and the environment. Short-term effectiveness in protecting on-site workers and the environment will be achieved through establishing appropriate management, construction, health and safety, and security procedures. Proper water management protocols will be implemented to prevent discharges offsite. Security and fences will be used to maintain controlled access during construction.

Implementability: The assessment against this criterion evaluates the technical and administrative feasibility, including the availability of trained and experienced personnel, materials, and equipment. Technical feasibility includes the ability to construct and operate the technology, the reliability of the technology, and the ability to effectively monitor the technology. Administrative feasibility includes the capability of obtaining permits, meeting permit requirements, and coordinating activities of governmental agencies. The proposed capping remedy for the Composite Worker area uses readily available capping techniques.

Cost Effectiveness: The assessment against this criterion evaluates the capital costs, annual Operating and Maintenance (O&M) costs, and the net present value (NPV) of this remedy relative to other alternatives. The capping remedy remedial costs would be incurred as part of the proposed site development, regardless of the placement of slag aggregate.



State Support / **Agency Acceptance:** MDE has been involved throughout the Site investigation process. The proposed use restrictions included in the proposed remedy are generally recognized as commonly employed measures for long-term stewardship. Ultimately State/MDE support will be evaluated based on comments received during the public comment period.

A capping remedy with institutional controls would satisfy the CERCLA Threshold Criteria and the Balancing Criteria and would do so in a manner that ensures reliable implementation and effectiveness. The remedy is cost-effective and consistent with the proposed development plan.



4.0 PROPOSED SITE DEVELOPMENT PLAN

Tradepoint Atlantic is proposing to construct two warehouse buildings on Sub-Parcel B1-2 along with exterior support areas (parking, etc.). The proposed development of the warehouse facilities will include permanent improvements on approximately 106 acres of land intended for occupancy in the eastern portion of Parcel B1, northwestern portion of Parcel B2, and northwestern portion of Parcel B5. The proposed future use of Sub-Parcel B1-2 is Tier 3 – Industrial. The remainder(s) of Parcels B1, B2, and B5 will be addressed in separate development plans in accordance with the requirements of the ACO that will include RADWPs, if necessary. Outside of the main development area designated as Sub-Parcel B1-2, easements with a total area of approximately 0.4 acres (within the LOD) will be utilized to install a rail spur and service utilities for the project. The temporary utility work is not intended to be the basis for the issuance of a NFA or COC. The Site (106 acres encompassing Sub-Parcel B1-2; excluding the external easements) will be fully capped by surface engineering controls.

Certain compounds are present in the soils located near the surface and in the subsurface at concentrations in excess of the PALs. Therefore, soil is considered a potential media of concern. Potential risks to future adult workers associated with impacts to soil and groundwater exceeding the PALs will be addressed through a remedy consisting of surface engineering controls (capping of the entire area) and institutional controls (deed restrictions). The proposed site development plan provides for a containment remedy and institutional controls that will mitigate future adult workers from contacting impacted soil at the Site. In addition, Tradepoint Atlantic has proposed the use of processed slag aggregate as the primary fill material at the Site. The placement of materials other than approved clean fill, including slag aggregate, requires the installation of surface engineering controls (i.e., capping) regardless of the existing soil conditions.

Future Construction Workers may contact impacted surface and/or subsurface soil during earth movement activities associated with construction, including within the easements outside of the primary development area. The findings of the SLRA indicated that the screening level estimates of Construction Worker cancer risk for the site-specific 80-day and 85-day exposure frequencies were less than 1E-5 (the acceptable level for no further action) for EU1-EXP and EU2, respectively. Furthermore, no HI values above 1 were identified for any target organ using the respective exposure frequencies. This evaluation indicates that site-specific health and safety protocols or further action would be required only if these durations were exceeded in EU1-EXP and EU2, respectively.

Certain activities at the Site are anticipated to exceed these allowable durations, and Construction Worker risks must be mitigated to facilitate the proposed construction work. Additional site-specific health and safety requirements are warranted to be protective of workers. Upgraded PPE beyond standard Level D protection will be used for the entire scope of work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for



Construction Workers during project implementation. The modified Level D PPE requirements which will be applied during this project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as **Appendix J**.

A restriction prohibiting the use of groundwater for any purpose at the Site will be included as an institutional control in the NFA and COC issued by the MDE, and a deed restriction prohibiting the use of groundwater will be filed. These groundwater use restrictions will protect future Composite Workers from potential exposures. Proper water management is required to prevent unacceptable discharges or risks to Construction Workers during development. Work practices and health and safety plans governing groundwater encountered during excavation activities will provide protection for Construction Workers involved with future development at the Site.

The development plan for the Site is shown on **Figure 2**, and the detailed development drawings (provided by Kimley-Horn and Associates, Inc.) are included as **Appendix E**. The process of constructing the proposed warehouse buildings and exterior support areas (parking, etc.) will involve the tasks listed below. As-built and regulatory documentation for the outlined tasks and procedures will be provided in a Sub-Parcel B1-2 Development Completion Report:

4.1. RESPONSE PHASE – GROUNDWATER ABANDONMENTS

Well and piezometer abandonments were previously discussed in the Logistics Centers Grading Plan dated November 2, 2018 (which was developed for preparatory grading work).

As indicated on **Figure 9**, several groundwater wells were located within the proposed LOD, including SW-059-MWS, SW-067-MWS, SW-069-MWS, SW08-PZM003, and SW08-PZM053. The listed groundwater wells were sampled during the Area B Groundwater Investigation, with the results presented and discussed in the Phase II Investigation Report. These monitoring wells have been properly abandoned in accordance with COMAR 26.04.04.34 through 36. It is understood that the agencies may require the installation of additional permanent wells in the future following site development.

In addition, select NAPL delineation piezometers were located within the LOD in the vicinity of B5-098-PZ. These NAPL delineation piezometers are shown on **Figure 7**. B1-088-PZ and B5-097-PZ were previously located within the LOD, but both locations were observed to have been destroyed (following the completion of the 30-day NAPL gauging measurements) by vehicle traffic or other causes. The delineation piezometers within the LOD were properly abandoned in accordance with COMAR 26.04.04.34 through 36. Each piezometer was gauged a final time on the abandonment date to confirm that NAPL had not accumulated in the casing.

The abandonment of any permitted monitoring wells must be reported to the Water Management Administration as per COMAR 26.04.04, and records of all monitoring well and piezometer



abandonments (including abandonment forms, if available) will be included in the Development Completion Report.

4.2. DEVELOPMENT PHASE

4.2.1. Erosion and Sediment Control Installation

Installation of erosion and sediment controls will be completed in accordance with the requirements of the 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control prior to any construction at the Site. Any soils which are disturbed during the installation of erosion and sediment controls will be replaced on-site below the cap.

4.2.2. Grading and Site Preparation

As indicated on the development plans in **Appendix E**, site grading will occur within the Sub-Parcel B1-2 boundary. The Site will be raised with net fill, which will require importing material to the Site. The major grading activities were covered by the Logistics Centers Grading Plan for Logistics Centers XI & XII dated November 2, 2018 (which was developed for preparatory grading work associated with the development of the Site); however, some additional grading will be required to facilitate final construction.

Any material that is not suitable for compaction will be excavated and replaced with subbase material, although it is not anticipated that poor soils will be encountered. Borrow materials will be obtained from MDE-approved sources and will be documented prior to transport to the Site. Processed slag aggregate sourced from the Tradepoint Atlantic property or other materials approved by the MDE for industrial use may be used as fill, but the placement of materials other than approved clean fill will necessitate that the Site will be subject to surface engineering controls (i.e., capping). Fill sources shall be free of organic material, frozen material, or other deleterious material. In the case that there is excess material (not anticipated), the spoils will be stockpiled at a suitable location in accordance with the Materials Management Plan (MMP) for the Sparrows Point Facility (Papadopulos & Associates, et al., June 17, 2015). This work will be coordinated with MDE accordingly. No excess material will leave the 3,100-acre property without prior approval from MDE.

4.2.3. Installation of Structures and Underground Utilities

The warehouse, parking areas, and other infrastructure associated with the development of Sub-Parcel B1-2 will be installed as shown on the development plans in **Appendix E**. Soils relocated or removed during construction may be replaced on-site below the cap, but soil removed from utility trenches cannot be used as fill within the utility trenches unless such materials are approved for this use by the VCP. Additional protocols for the installation of utilities at the Site are provided in Section 5.1.2.



Any water removed will be collected to be sampled as described in Section 5.2 and, if acceptable, sent to the on-site HCWWTP. If analytical results indicate the presence of levels of contaminants exceeding levels that are acceptable for treatment at the HCWWTP (as defined in Section 5.2), the water will either be pre-treated through an on-site treatment system and retested prior to sending to the HCWWTP or will be disposed of at an appropriate off-site facility. Any water that must be removed and sent to the HCWWTP will be pumped to the nearest catch basin that discharges to the Tin Mill Canal (TMC). Any water discharged to a catch basin will be pumped through a filter bag or equivalent to remove suspended solids prior to discharge. Documentation of the catch basin(s) used shall be provided in the Development Completion Report.

4.2.4. Floor Slabs and Paving

Much of the Site will be covered with floor slabs or paving as indicated in the development plans provided in **Appendix E**. The paved areas will receive a layer of subbase material which will consist of compacted aggregate base, which may include processed slag aggregate sourced from the Tradepoint Atlantic property. The placement of processed slag aggregate or materials other than MDE-approved clean fill will necessitate that the Site will be subject to surface engineering controls (i.e., capping).

The required minimum thicknesses of all site-wide pavement sections which will serve as surface engineering controls are indicated in the general cap sections provided in **Appendix F**. According to the development plans, all paved areas at the Site will be installed with a minimum of 12 inches of crushed blast furnace slag subgrade and a minimum of 4 inches of overlying pavement surface (asphalt or concrete), which meet these required minimum thicknesses.

4.2.5. Landscaping

Small areas of the Site will be landscaped and may overlie areas which have been graded using processed slag aggregate as fill material. The required minimum thicknesses of all site-wide landscaping sections which will serve as surface engineering controls are indicated in the general cap sections provided in **Appendix F**. According to the development plans, all landscape areas at the Site will be installed with a minimum of 6 inches of clean topsoil overlying 18 inches of clean fill, with an underlying geotextile marker fabric between the clean fill and the underlying materials. The proposed landscape sections meet the minimum capping requirements.

4.2.6. Stormwater Management

The overall utility and grading plans for the Site showing the proposed locations of two stormwater ponds are provided within **Appendix E**. It is notable that the proposed southwestern stormwater management pond is located in relatively close proximity to several soil borings that were identified as locations of potential concern with respect to TPH-DRO and/or NAPL (refer to **Figure 6** and Section 3.2.3). Soil screening will be especially important during any excavation of



existing soil in this area. Contingency measures to address the potential presence of NAPL which could be encountered during construction are addressed in subsequent sections of this RADWP.

The required minimum thicknesses of all pond sections which will serve as surface engineering controls are indicated in the general cap sections provided in **Appendix F**. Stormwater ponds at the Site will be installed with an impermeable liner between the existing soil (or fill) and overlying clean fill or stone. Alternatively, a low-permeability clay liner with a minimum thickness of 12 inches may be used in lieu of the impermeable liner, in which case it must also be covered by a minimum of 12 inches of clean fill or stone for a total cap thickness of 24 inches. If a low-permeability clay liner is used, the material must undergo geotechnical testing and be approved by the MDE prior to its use, as outlined in Section 5.1.5.

Tradepoint Atlantic will work with the MDE Industrial & General Permits Division to renew the property-wide NPDES permit. A meeting has already been conducted for this purpose. The stormwater management systems for each parcel are reviewed and approved by Baltimore County for each individual development project. A full plan for the property will be designed once more parcels have been completed and there is a greater understanding of how the overall property will be developed. The agencies will be copied when the management plan is submitted.



5.0 DEVELOPMENT IMPLEMENTATION PROTOCOLS

5.1. DEVELOPMENT PHASE

This plan presents protocols for the handling of soils and fill materials in association with the development of Sub-Parcel B1-2. In particular, this plan highlights the minimum standards for construction practices and managing potentially contaminated materials to reduce potential risks to workers and the environment.

Several exceedances of the PALs were identified in soil samples across the Site. The PALs are set based on USEPA's RSLs for industrial soils, or other direct guidance from the MDE. Because PAL exceedances can present potential risks to human health and the environment at certain concentrations, this plan presents material management and other protocols to be followed during the work to adequately mitigate such potential risks for material remaining on-site during the development phase. No soils contaminated with total PCBs in excess of 50 mg/kg have been identified in Sub-Parcel B1-2. There was one soil sample with an elevated concentration of lead (B1-051-SB-5 with a detection of 12,300 mg/kg), one soil sample with an elevated concentration of hexavalent chromium (B1-117-SB-5 with a detection of 555 mg/kg), and one soil sample with an elevated concentration of antimony (B5-068-SB-1 with a detection of 1,680 mg/kg); however, none of these are expected to present an unacceptable risk to workers, as discussed in Section 3.2.3, and no additional response actions are proposed in these areas. There were several locations within, or adjacent to, the proposed grading area with potential indications of NAPL in the soil cores and/or elevated soil concentrations of TPH-DRO above 6,200 mg/kg (B1-088-SB, B5-097-SB, B5-098-SB, B5-099-SB, B5-103-SB, and B5-161-SB). These borings are pictured with the current development plan on **Figure 6** and should be considered with respect to utility alignments and inverts prior to trenching in these areas. The soil boring observation logs from these locations are provided for reference in **Appendix C**.

Following completion of the SLRA, the screening level estimates of Construction Worker cancer risk for the site-specific 80-day and 85-day exposure frequencies were less than 1E-5 (the acceptable level for no further action) for EU1-EXP and EU2, respectively. Furthermore, none of the potential non-cancer hazards were elevated above the HI of 1 for any exposure scenario when the schedule for intrusive construction activities was limited to these respective exposure durations. Certain activities at the Site are anticipated to exceed these allowable durations, and Construction Worker risks must be mitigated to facilitate the proposed work. Additional site-specific health and safety requirements are warranted to be protective of workers. Upgraded PPE beyond standard Level D protection will be used for the entire scope of work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied during this project, including specific PPE details, planning,



tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as **Appendix J**.

Based on the characterization of surface and subsurface soils, a capping remedy is required at the Site to be protective of future adult Composite Workers who could potentially contact surface soil (or relocated subsurface soil) at the Site. In addition, Tradepoint Atlantic has proposed the use of processed slag aggregate as the primary fill material at the Site. The placement of materials other than approved clean fill, including slag aggregate, requires the installation of surface engineering controls (i.e., capping) regardless of the existing soil conditions. The proposed capping sections will meet the required minimum thicknesses for surface engineering controls, which are provided in **Appendix F**.

5.1.1. Erosion/Sediment Control

Erosion and sediment controls will be installed prior to commencing work in accordance with 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control. The erosion and sediment controls will be approved by the MDE. In addition, the following measures will be taken to prevent contaminated soil from exiting the Site:

- Stabilized construction entrance will be placed at site entrance.
- A dry street sweeper will be used as necessary on adjacent roads, and the swept dust will be collected and properly managed.
- Accumulated sediment removed from silt fence, and sediment traps if applicable, shall be periodically removed and returned to the Site.

5.1.2. Soil Excavation and Utility Trenching

A pre-excavation meeting shall be held to address proper operating procedures for working on-site and monitoring excavations and utility trenching in potentially contaminated material. This meeting shall include the construction manager and the Environmental Professional (EP) providing oversight on the project. During the meeting, the construction manager and the EP shall review the proposed excavation and trenching locations and any associated utility inverts. The construction manager will be responsible for conveying all relevant information regarding excavation/grading and/or utility work to the site workers who will be involved with these activities. There were several soil borings with potential evidence of NAPL identified during the preceding Phase II Investigations within a reasonable proximity to the development LOD (see Figure 6 and Appendix C). It is notable that the proposed southwestern stormwater management pond is located in relatively close proximity to several soil borings that were identified as locations of potential concern with respect to TPH-DRO and/or NAPL (refer to Section 3.2.3). Soil screening will be especially important during any excavation of existing soil in this area. No additional response measures are proposed in these areas at this time, but the NAPL Contingency



Plan (discussed below) must be reviewed during the pre-excavation meeting. The HASP for the project shall also be reviewed and discussed.

The EP will provide oversight of soil excavation/trenching activities as described in Section 5.6. Soil excavation/trenching will occur during various phases of construction. In general, and based on the existing sampling information, all excavated materials are expected to be suitable for replacement on the Site. However, the EP will monitor the soil excavation activities for signs of significantly contaminated material which may not be suitable for reuse (as described below).

To the extent practical, all excavation activities should be conducted in a manner to minimize double or extra handling of materials. Any stockpiles shall be kept within the Site footprint, and in a location that is not subjected to concentrated stormwater runoff. Stockpiles shall be managed as necessary to prevent the erosion and off-site migration of stockpiled materials, and in accordance with the applicable provisions of the 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control. Soil designated for replacement on-site which does not otherwise exhibit evidence of contamination (as determined by the EP) may be managed in large stockpiles (no size restriction) as long as they remain within the erosion and sediment controls.

All utility trenches will be backfilled with bedding and backfill materials approved by the MDE for industrial use. A general utility cross section is provided as **Appendix G**. Additional preventative measures will be required if evidence of petroleum contamination is encountered, to prevent the discharge to, or migration of, petroleum product along a utility conduit. Contingency measures have been developed to ensure that utilities will be constructed in a manner that will prevent the migration of any encountered NAPL, and that excavated material will be properly managed. The Utility Excavation NAPL Contingency Plan (**Appendix H**) provides protocols to be followed if NAPL is encountered during the construction activities. Preventative measures to inhibit the spread of petroleum product will be conducted in accordance with this plan.

The EP will monitor all soil excavation and utility trenching activities for signs of potential contamination. In particular, soils will be monitored with a hand-held PID for potential VOCs, and will also be visually inspected for the presence of staining, petroleum waste materials, or other indications of significant contamination. If screening of excavated materials by the EP indicates the presence of conditions of potential concern (i.e., sustained PID readings greater than 10 ppm, visual staining, unsuitable waste materials, etc.), such materials shall be segregated for additional sampling and special management.

Excavated material exhibiting evidence of significant contamination shall be placed in stockpiles (not to exceed 500 cubic yards) on polyethylene sheeting and covered with polyethylene sheeting to minimize potential exposures and erosion when not in use. Materials stockpiled due to evidence of contamination will be sampled in accordance with waste disposal requirements, and transported to an appropriate permitted disposal facility. Plans for analysis of segregated soils for any use other than disposal must be submitted to the MDE for approval.



Excavated material that is visibly impacted by NAPL will be segregated and managed in accordance with the requirements specified in the Utility Excavation NAPL Contingency Plan. Excavated material with indications of possible NAPL contamination will also be containerized or placed in a stockpile (not to exceed 500 cubic yards) on polyethylene sheeting and covered with polyethylene sheeting until the material can be analyzed for TPH/Oil & Grease and PCBs (total) to characterize the material for appropriate disposal. The MDE will be notified if such materials are encountered during excavation or utility trenching activities.

5.1.3. Soil Sampling and Disposal

Excavated materials that are determined by the EP to warrant sampling and analysis because of elevated PID readings or other indications of potential contamination shall be sampled and analyzed to determine how the materials should be managed. If excavated and stockpiled, such materials should be covered with a polyethylene tarp to minimize potential exposures and erosion. All stockpiled soil may be considered for use as fill at this Site or on other areas of the property depending on the analytical results. A sampling Work Plan including a description of the material, estimated volume, and sampling parameters will be submitted to the MDE for approval. The resulting analytical data will be submitted to the MDE to determine the suitability of the material for reuse. If the MDE determines that the materials are unsuitable for reuse, the materials will be sampled to determine if they are classified as hazardous waste.

Soil material that is determined to be a hazardous waste shall be shipped off-site in accordance with applicable regulations to an appropriate and permitted RCRA disposal facility. Soil material may be taken to an appropriate off-site non-hazardous landfill for proper disposal if the concentrations of excavated sampled materials indicate that the materials are not hazardous, but still are not suitable for reuse. The quantities of all materials that require disposal off-site, if any, will be recorded and identified in the Development Completion Report.

5.1.4. **Fill**

Processed slag aggregate sourced from the Tradepoint Atlantic property will be used as the primary fill material for this project. The placement of processed slag aggregate or materials other than approved clean fill will necessitate that the Site will be subject to surface engineering controls (i.e., capping). Soil excavated on the sub-parcel has been determined to be suitable for re-use at the Site below the surface engineering controls, unless such materials are determined by the EP/MDE to be unsuitable for use as outlined in Section 5.1.2 and Section 5.1.3.

All over-excavated utility trenches will be backfilled with bedding and backfill approved by the MDE for industrial use. Soil removed from utility trenches cannot be used as fill within the utility trenches unless such materials are approved for this use by the VCP. As with structural fill, processed slag aggregate and other materials approved for industrial use can be used as backfill in utility trenches if the area will be covered by a VCP cap. Any utility backfill which will extend



into the cap (i.e., top 2 feet of backfill in landscaped areas) must meet the VCP clean fill requirements, and a geotextile marker fabric will be placed between the VCP clean fill and any underlying material. Materials placed in areas outside of Site boundary designated to be capped (i.e., within the external easements outside of Sub-Parcel B1-2) must meet the VCP clean fill requirements, or be otherwise approved by the MDE prior to placement. A general utility detail drawing is provided as **Appendix G**. Material imported to the Site will be screened according to MDE guidance for suitability.

5.1.5. Clay Liner Installation (if applicable)

If a clay liner is used in lieu of the impermeable liner between the existing soil (or fill) and overlying clean fill or stone in the proposed stormwater ponds, the following requirements shall be met. As shown in **Appendix F**, the low-permeability clay liner shall have a minimum thickness of 12 inches and shall be covered by a minimum of 12 inches of clean fill or stone.

Low-permeability clay for the stormwater pond liner construction (if selected) shall consist of relatively homogeneous materials that are not gap-graded or susceptible to soil piping, and shall have at least 15% of the material finer than the No. 200 sieve size.

If a clay liner is selected, the EP is responsible for ensuring testing as required to approve the low-permeability clay. An independent geotechnical testing laboratory shall carry out the following advance tests on each off-site source of material proposed for construction of the low-permeability clay liner.

- Standard Proctor ASTM D 698
- Hydraulic Conductivity Tests ASTM D 5084

The test results shall be submitted to the EP and the MDE for review and the material shall be approved by both parties prior to transportation to the Site. The low-permeability clay must be compacted to a density that corresponds to a hydraulic conductivity of $1x10^{-5}$ cm/s or lower as determined during laboratory testing. The in-place moisture content and compaction shall be measured by the EP during construction to match the selected laboratory conditions and verify compliance with the requirements approved by the MDE. Compaction testing shall be conducted with a nuclear density gauge in accordance with ASTM D 6938 at a frequency of at least one test per 2,500 square feet and at least one test per lift. The compacted liner shall be at least 12 inches thick and shall consist of at least two separate lifts of material placed in 8-inch maximum loose lift thickness (or 4 inches where hand-operated equipment is used). Materials that do not meet the compaction, moisture content, and/or other material specifications shall be reworked until acceptable results are obtained, or rejected and replaced with suitable materials.



5.1.6. **Dust Control**

General construction operations, including soil excavation and transport, and trenching for utilities will be performed at the Site. These activities are anticipated to be performed in areas of soil impacted with COPCs. Best management practices should be undertaken at the Sparrows Point property as a whole to prevent the generation of dust which could impact other areas of the property outside of the immediate work zone. To limit worker exposure to contaminants borne on dust and windblown particulates, dust monitoring will be performed in the immediate work zone and at the upwind and downwind perimeter of the Site, and dust control measures will be implemented if warranted based on the monitoring results. The action level proposed for the purpose of determining the need for dust suppression techniques (e.g. watering and/or misting) during the development activities at the Site will be 3.0 mg/m³. The lowest of the site-specific dust action levels, OSHA PELs, and ACGIH TLV was selected as the proposed action level.

The EP will be responsible for the dust monitoring program. Air monitoring will be performed using Met One Instruments, Inc. E-Sampler dust monitors or equivalent real-time air monitoring devices. The EP will set-up dust monitoring equipment at the outset of ground intrusive work or other dust-generating activities, and continuous dust monitoring will be performed during this work. In addition to work area monitoring, a dust monitor will be placed at selected perimeter locations that will correspond to the upwind and downwind boundaries based on the prevailing wind direction predicted for that day. The prevailing wind direction will be assessed during the day, and the positions of the perimeter monitors will be adjusted if there is a substantial shift in the prevailing wind direction.

Once all dust-generating activities are complete (which may occur at a later stage of the project once ground intrusive work has been completed or after the Site has been capped), the dust monitoring program may be discontinued. If additional dust-generating activities commence, additional dust monitoring activities will be performed.

If sustained dust concentrations exceed the action level (3.0 mg/m³) at any of the monitoring locations as a result of conditions occurring at the Site, operations will be stopped temporarily until dust suppression can be implemented. Operations may be resumed once monitoring indicates that dust concentrations are below the action level. The background dust concentration will be utilized to evaluate whether Site activities are the source of the action level exceedance. The background dust concentration will be based on measurements over a minimum of a 1-hour period at the upwind Site boundary. The upwind data will be used to calculate a time weighted average background dust concentration. As noted above, the locations of the perimeter dust monitors may be adjusted periodically if there is a substantial shift in the prevailing wind direction.

As applicable, air monitoring will be conducted during development implementation activities to assess levels of exposure to Site workers, establish that the work zone designations are valid, and verify that respiratory protection being worn by personnel, if needed, is adequate. Concurrent with



the work zone air monitoring, perimeter air monitoring will also be performed at the upwind and downwind Site boundaries to ensure contaminants are not migrating off-site. The concentration measured at the downwind perimeter shall not exceed the action level of 3.0 mg/m³, unless caused by background dust from upwind of the Site. If exceedances of the action level are identified downwind for more than five minutes, the background dust concentration shall be evaluated to determine whether the action level exceedances are attributable to Site conditions. If on-site activities are the source of the exceedances, dust control measures and additional monitoring will be implemented. The dust suppression measures may include wetting or misting using a hose connected to a water supply or a water truck stationed at the Site.

Dust control measures will be implemented as described above to address dust generated as a result of construction activities conducted at the Site. However, based on the nature of the area and/or on-going activities surrounding the Site, it is possible that windblown particulates may come from surrounding areas. As discussed above, the dust concentration in the upwind portion of the Site will be considered when monitoring dust levels in the work area. A pre-construction meeting will be held to discuss the potential of windblown particulates from other activities impacting the air monitoring required for this RADWP. Site contact information will be provided to address the possibility of upwind dust impacts. If dust is observed above the action level (3.0 mg/m³) and it is believed to originate from off-site (i.e., upwind) sources, this will immediately be reported to the MDE-VCP project team, as well as the MDE Air and Radiation Administration (ARA).

5.2. WATER MANAGEMENT

This plan presents the protocols for handling any groundwater or surface water that needs to be removed to facilitate construction of the proposed Sub-Parcel B1-2 development.

5.2.1. Groundwater PAL Exceedances

A total of 14 shallow groundwater samples (as shown on **Figure 5**) were collected from monitoring wells and temporary groundwater sample collection points within and surrounding the Site and its associated easements. Aqueous PAL exceedances in shallow groundwater in the vicinity of the development LOD included both inorganic and organic compounds. The aqueous PAL exceedances that are relevant for this RADWP obtained during the Area B Groundwater Investigation, Parcel B2 Phase II Investigation, and Parcel B23 Phase II Investigation are summarized on **Figure GW1**. While the concentrations of PAL exceedances are not deemed to be a significant human health hazard since there is no on-site groundwater use, proper water management is required to prevent unacceptable discharges or risks to on-site workers.

5.2.2. **Dewatering**

Dewatering may be necessary during the installation of underground utilities and within trenches and excavations. If dewatering is required, it shall be done in accordance with all local, state, and



federal regulations. Water that collects in excavations/trenches due to intrusion of groundwater, stormwater, and/or dust control waters will be transported to the HCWWTP. The water will be treated and discharged in accordance with NPDES Permit No. 90-DP-0064A; I. Special Conditions; A.4; Effluent Limitations and Monitoring Requirements.

Any water that must be removed and sent to the HCWWTP will be pumped to the nearest catch basin that discharges to the TMC. Water in the TMC feeds into the HCWWTP where it is treated prior to release into Bear Creek. Any water discharged to a catch basin will be pumped through a filter bag or equivalent to remove suspended solids prior to discharge. A figure is not being provided at this time as the specific discharge location for dewatering fluids may change during development as conditions dictate. Documentation of the catch basin(s) used shall be provided in the Development Completion Report.

The EP will inspect any water that collects in the excavations/trenches. If the water exhibits indications of significant contamination (sheen, odor, discoloration, presence of product), or if the excavation/trench is within a known area of significant groundwater contamination (if groundwater is the source of the intrusive water) or a significant Phase II Investigation target, the water may be sampled and analyzed for some or all of the analyses listed below. The analyses run will be dependent on the suspected source of contamination and local site conditions.

The results of the analyses will be reviewed by the HCWWTP operator to determine if any wastewater treatment system adjustments are necessary. If the results of the analyses are above the threshold levels listed below, the water will be further evaluated to confirm acceptable treatment at the HCWWTP, or will be evaluated to design an appropriate pre-treatment option. Alternatively, the water may be disposed of at an appropriate off-site facility.

	Analysis	Threshold Levels
•	Total metals by USEPA Method 6020A	1,000 ppm
•	PCBs by USEPA Method 8082	>Non-Detect
•	SVOCs by USEPA Method 8270C	1 ppm
•	VOCs by USEPA Method 8260B	1 ppm
•	Oil & Grease by USEPA Method 1664	200 ppm

Documentation of any water testing, as well as the selected disposal option, will be reported to the MDE in the Development Completion Report. Any permits or permit modifications related to dewatering will be provided to the agencies as addenda to this RADWP.



5.3. HEALTH AND SAFETY

A property-wide Health and Safety Plan (HASP provided as **Appendix I**) has been developed and is attached to this plan to present the minimum requirements for worker health and safety protection for all development projects. All contractors working on the Site must prepare their own HASP that provides a level of protection at least as much as that provided by the attached HASP. Alternately, on-site contactors may elect to adopt the HASP provided.

General health and safety controls (level D protection) would be adequate to mitigate any potential risk to Construction Workers during development for a duration of up to 80 exposure days in EU1-EXP and 85 exposure days in EU2. However, certain activities at the Site (utility installations for specific crews) are anticipated to exceed these allowable durations. Modified Level D PPE will be used for the entire scope of work covered by this RADWP as an additional protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. Health and safety controls outlined in the property-wide HASP and PPE SOP will mitigate any potential risk to Construction Workers from contacting impacted soil and groundwater during development. The modified Level D PPE requirements planned for this development project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as **Appendix J**.

Prior to commencing work, the contractor must conduct an on-site safety meeting for all personnel. All personnel must be made aware of the HASP and the PPE SOP. Detailed safety information shall be provided to personnel who may be exposed to COPCs. Workers will be responsible for following established safety procedures to prevent contact with potentially contaminated material.

5.4. INSTITUTIONAL CONTROLS (FUTURE LAND USE CONTROLS)

Long-term conditions related to future use of the Site will be placed on the RADWP approval, NFA, and COC. These conditions are anticipated to include the following:

- A restriction prohibiting the use of groundwater for any purpose at the Site and a requirement to characterize, containerize, and properly dispose of groundwater in the event of deep excavations encountering groundwater. The entire Tradepoint Atlantic property will be subject to the groundwater use restriction.
- Notice to the MDE and USEPA at least 30 days prior to any future soil disturbances if the
 proposed duration of intrusive activity exposure would exceed the allowable duration
 determined in the SLRA for that EU, unless the contractor is proposing to use the upgraded
 modified Level D PPE specified in the approved SOP.
- Requirement for a HASP for any future excavations at the Site.



- Complete appropriate characterization and disposal of any future material excavated at the Site in accordance with applicable local, state and federal requirements.
- Implementation of inspection procedures and maintenance of the containment remedies.

The responsible party will file the above deed restrictions as defined by the MDE-VCP in the NFA and COC. The Tenant will be required to sign onto the Environmental Covenant with restriction in the NFA. Tradepoint Atlantic will notify the Tenant of this requirement and will provide MDE with contact information for the Tenant prior to issuance of the NFA.

5.5. Post Remediation Requirements

Post remediation requirements will include compliance with the conditions specified in the NFA, COC, and the deed restrictions recorded for the Site. Deed restrictions will be recorded within 30 days after receipt of the final NFA. In addition, the MDE and USEPA will be provided with a written notice at least 30 days prior to any future soil disturbances if the proposed duration of intrusive activity exposure would exceed the allowable duration determined in the SLRA for that EU (unless the contractor is proposing to use the upgraded modified Level D PPE specified in the approved SOP). Written notice of planned excavation activities will include the proposed date(s) for the excavation, location of the excavation, health and safety protocols (as required), clean fill source (as required), and proposed characterization and disposal requirements.

Additional requirements will include inspection procedures and maintenance of the containment remedies to minimize degradation which could lead to future exposures. An Operations and Maintenance Plan (O&M Plan) will be submitted in the future for MDE approval, and will include long-term inspection and maintenance requirements for the capping remedies installed at the Site. The responsible party will perform cap inspections, perform maintenance of the cap, and retain cap inspection records, as required by the O&M Plan.

5.6. CONSTRUCTION OVERSIGHT

Construction Oversight by an EP will ensure and document that the project is built as designed and appropriate environmental and safety protocols are followed. Upon completion, the EP will certify that the project is constructed in accordance with this RADWP.

The EP will monitor all soil excavation/trenching activities for signs of potential contamination that may not have been previously identified. In particular, soils will be monitored with a handheld PID for potential VOCs, and will also be visually inspected for staining, petroleum waste materials, or other indications of significant contamination. If screening of excavated materials by the EP indicates the presence of conditions of potential concern (i.e., sustained PID readings greater than 10 ppm, visual staining, unsuitable waste materials, etc.), such materials shall be segregated for additional sampling and special management (as described in Section 5.1.2; Soil Excavation and Utility Trenching). The EP will also perform routine periodic breathing zone



monitoring and PPE spot checks during ground intrusive activities. The EP will also inspect any water that collects in the excavations/trenches on an as-needed basis to coordinate appropriate sampling prior to disposal (as described in Section 5.2.2; Dewatering).

Daily inspections, as necessary, will be performed during general site grading and cap construction activities to verify that appropriate fill materials are being used (as described in Section 5.1.4; Fill), geotechnical testing and field verification is performed as required for any clay liners (as described in Section 5.1.5; Clay Liner Installation), dust monitoring and control measures are being implemented as appropriate (as described in Section 5.1.6; Dust Control), the requirements of the HASP and the PPE SOP are being enforced as applicable (as described in Section 5.3; Health and Safety), and surface engineering controls are being installed with the appropriate minimum thicknesses (as shown on the RADWP attachments). Oversight by an EP will not be required during construction activities which do not have a significant environmental component, such as above-grade building construction.

Records shall be provided by the EP to document:

- Compliance with soil screening requirements
- Proper water management, including documentation of any testing and water disposal
- Compliance with geotechnical testing requirements and field verification for stormwater pond clay liners (if applicable)
- Observations of construction activities during site grading and cap construction
- Proper cap thickness and construction



6.0 PERMITS, NOTIFICATIONS AND CONTINGENCIES

The participant and their contractors will comply with all local, state, and federal laws and regulations by obtaining any necessary approvals and permits to conduct the activities contained herein. Any permits or permit modifications from State or local authorities will be provided as addenda to this RADWP.

A grading permit is required if the proposed grading disturbs over 5,000 square feet of surface area or over 100 cubic yards of earth. A grading permit is required for any grading activities in any watercourse, floodplain, wetland area, buffers (stream and within 100 feet of tidal water), habitat protection areas or forest buffer areas (includes forest conservation areas). Erosion and Sediment Control Plans will be submitted to, and approved by, the MDE prior to initiation of land disturbance for development.

There are no wetlands identified within the project area and no work will be performed beyond the shoreline so no permits are required from the MDE Water Resources Administration.

Contingency measures will include the following:

- 1. The MDE will be notified immediately of any previously undiscovered contamination, previously undiscovered storage tanks and other oil-related issues, and citations from regulatory entities related to health and safety practices.
- 2. Any significant change to the implementation schedule will be noted in the progress reports to MDE.
- 3. General health and safety controls (level D protection) would be adequate to mitigate any potential risk to Construction Workers during development for a duration of up to 80 exposure days in EU1-EXP and 85 exposure days in EU2. However, certain activities at the Site are anticipated to exceed these allowable durations. Therefore, additional site-specific health and safety requirements are warranted to be protective of workers. Upgraded PPE beyond standard Level D protection will be used for the entire scope of work covered by this RADWP as a protective measure to ensure that there are no unacceptable exposures for Construction Workers during project implementation. The modified Level D PPE requirements which will be applied during this project, including specific PPE details, planning, tracking/supervision, enforcement, and documentation, are outlined in the PPE SOP provided as Appendix J. If it is not possible to implement the PPE SOP as provided, the agencies will be notified and a RADWP Addendum will be submitted which details procedures to be undertaken to mitigate the potential risk to Construction Workers.



7.0 IMPLEMENTATION SCHEDULE

Progress reports will be submitted to the MDE on a quarterly basis. Each quarterly progress report will include, at a minimum, a discussion of the following information regarding tasks completed during the specified quarter:

- Development Progress
- Dust Monitoring
- Water Management
- Soil Management (imported materials, screening, stockpiling)
- Soil Sampling and Disposal
- Notable Occurrences (if applicable)
- Additional Associated Work (if applicable)

The proposed implementation schedule is shown below:

Task	Proposed Completion Date
Logistics Centers Grading Plan Approval	December 31, 2018 (complete)
Anticipated Final RADWP Approval	September 13, 2019
Task	Proposed Completion Date
Groundwater Abandonments	March 2019 (complete)
Task	Proposed Completion Date
Erosion and Sediment Control Installation	January 2019
Slag (or Alt. Fill) Delivery & Placement	June 2019
Building Pad Construction	July 2019
Utility Installations:	
Domestic Water/Fire Loop	August 2019
Sanitary	August 2019
Stormwater	August 2019
Parking Area Grading Completion	November 2019



Shell Completion February 2020

Submittal of Development Completion Report/ June 2020 Notice of Completion of Remedial Actions*

Request for NFA from the MDE July 2020

Recordation of institutional controls in

the land records office of Baltimore Within 30 days of receiving the approval


County of NFA from the MDE


Submit proof of recordation with Upon receipt from Baltimore County


Baltimore County


*Notice of Completion of Remedial Actions shall be prepared by Professional Engineer registered in Maryland and submitted with the Development Completion Report to certify that the work is consistent with the requirements of this RADWP and the Site is suitable for occupancy and use.




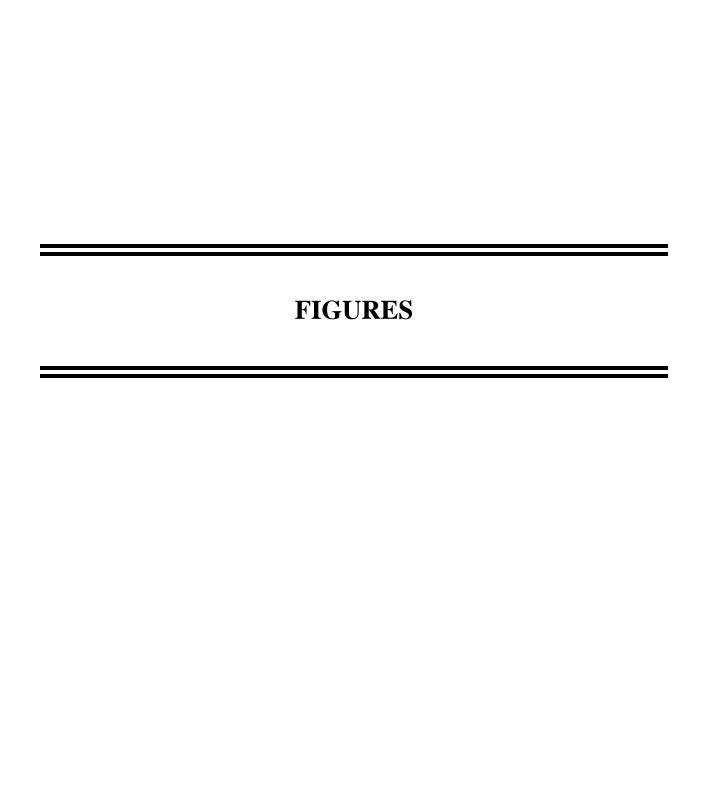


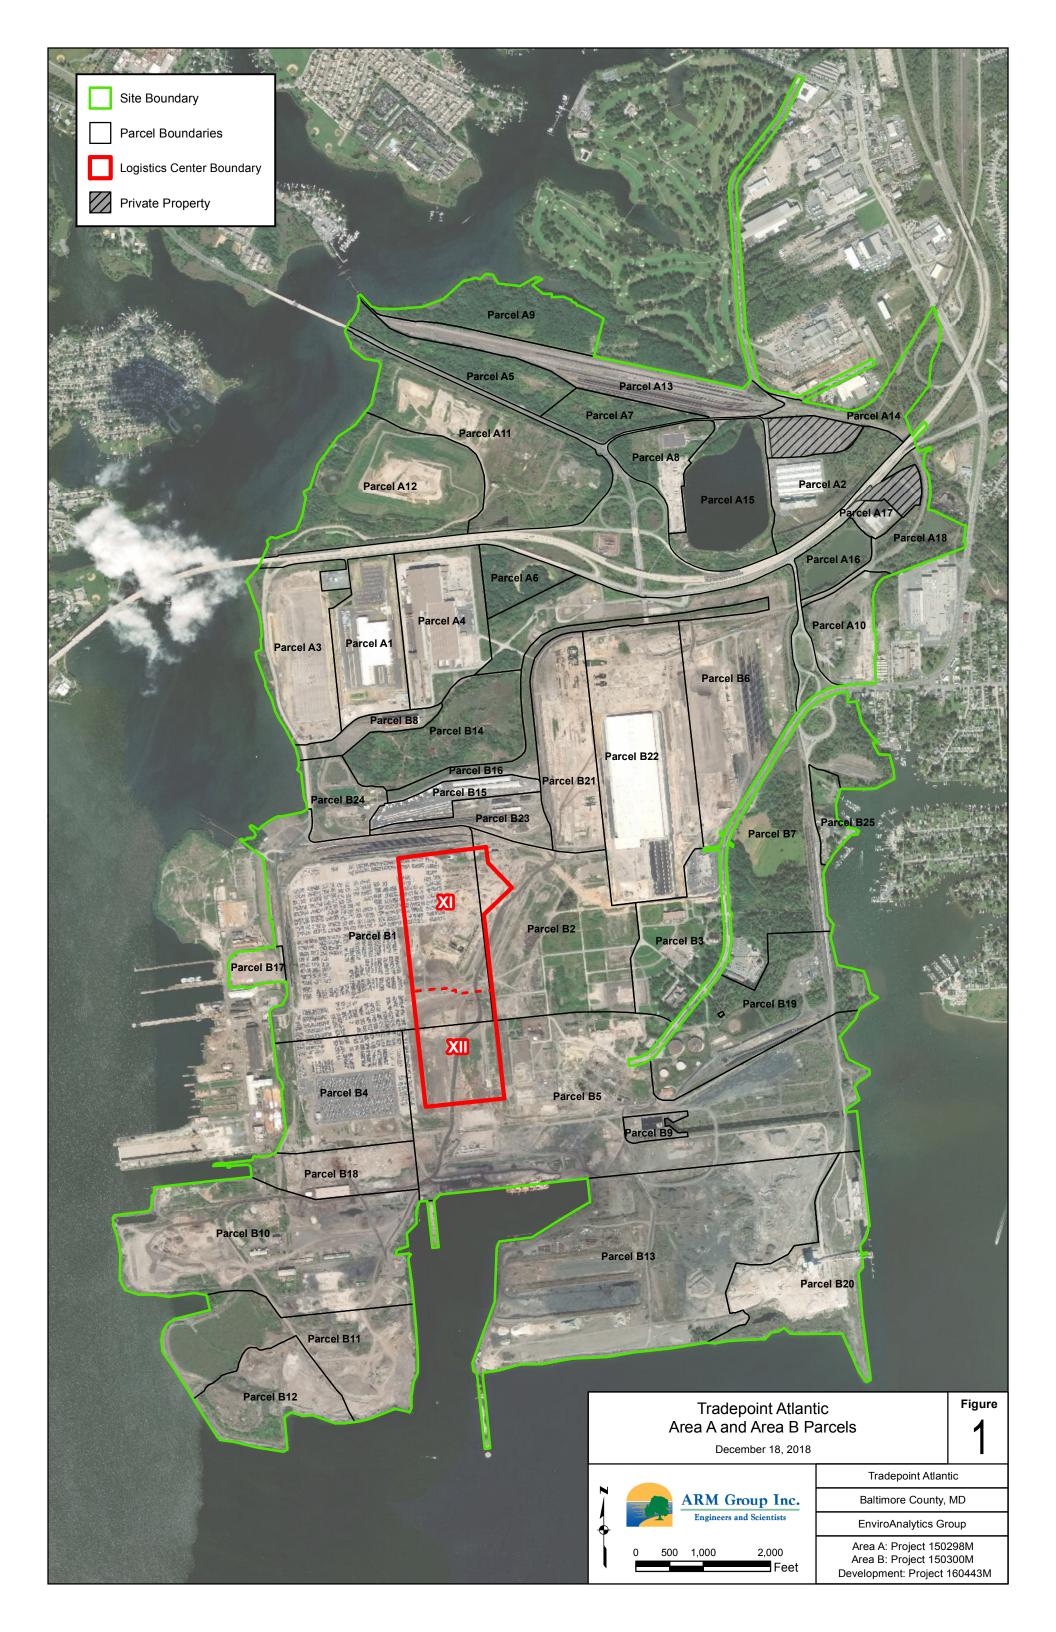


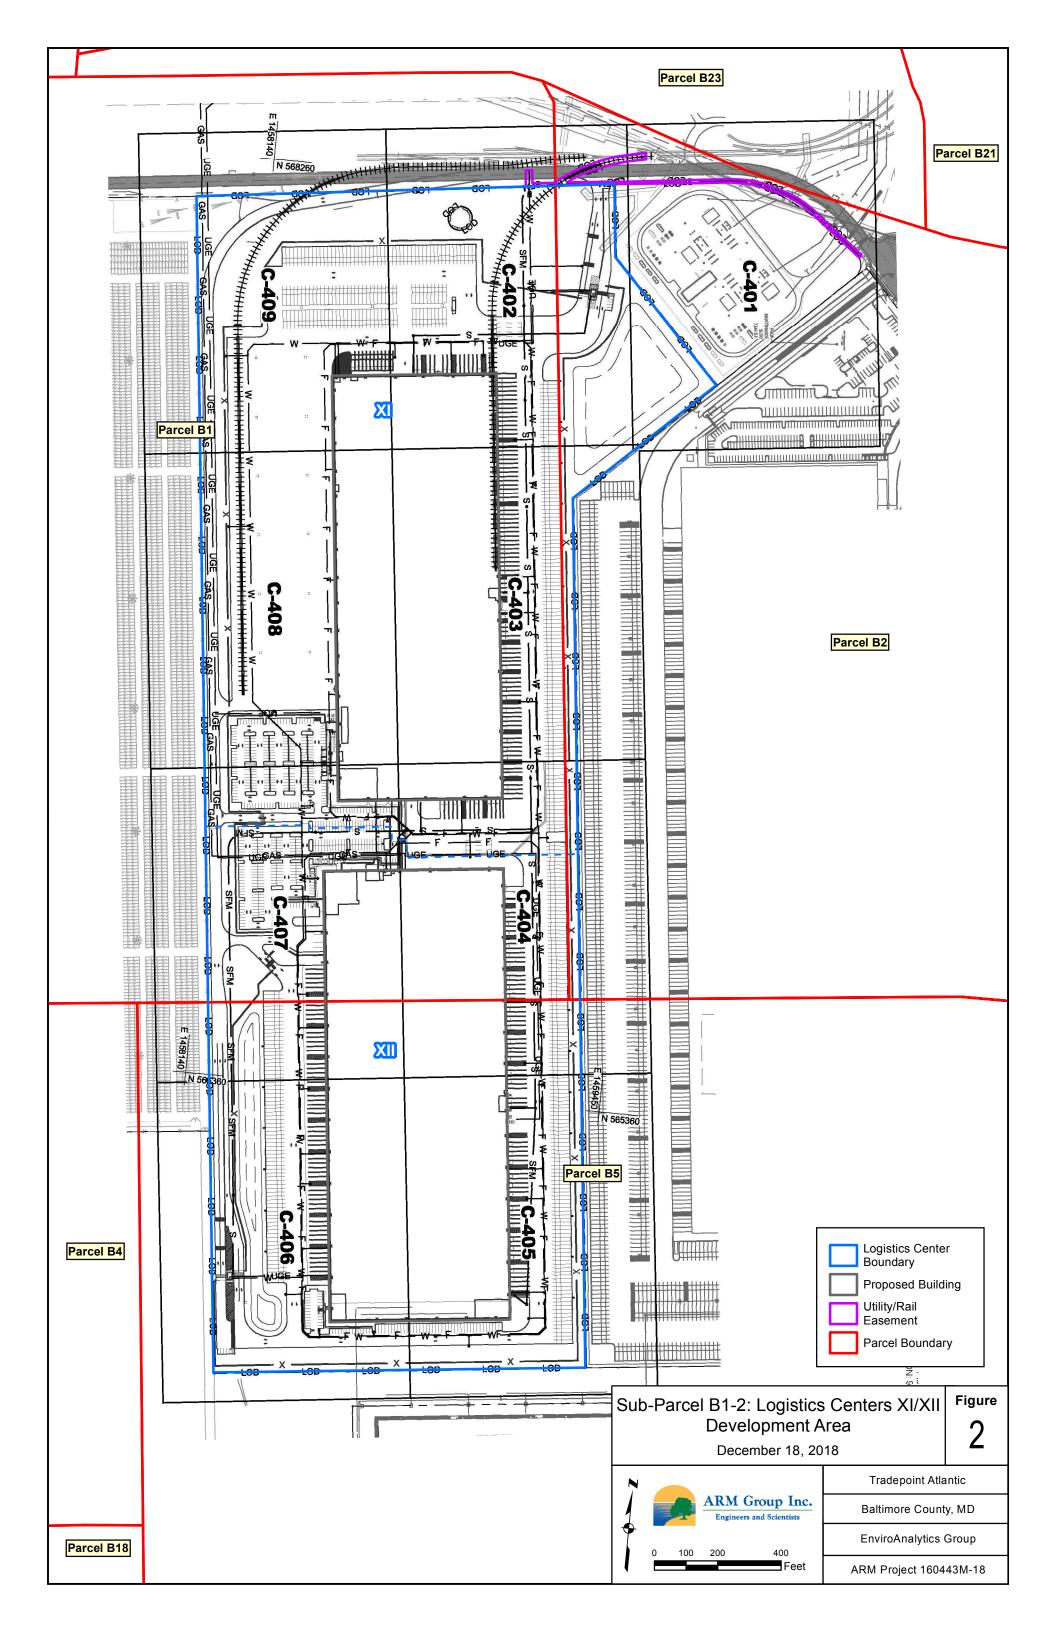


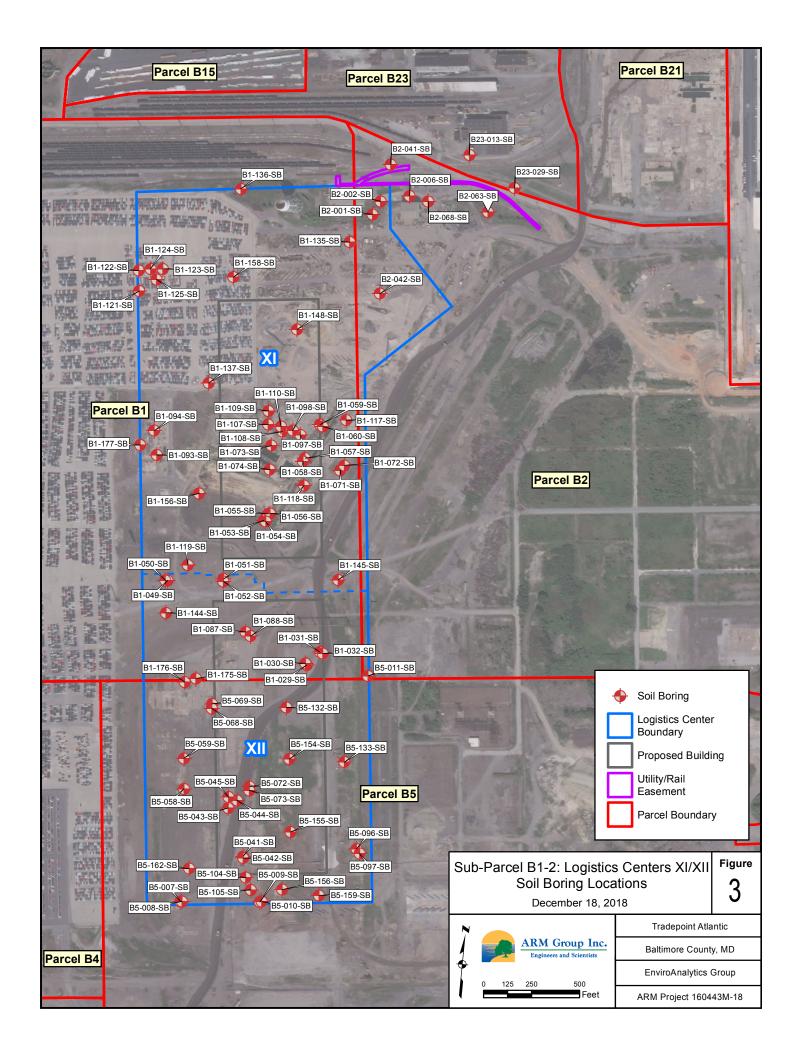


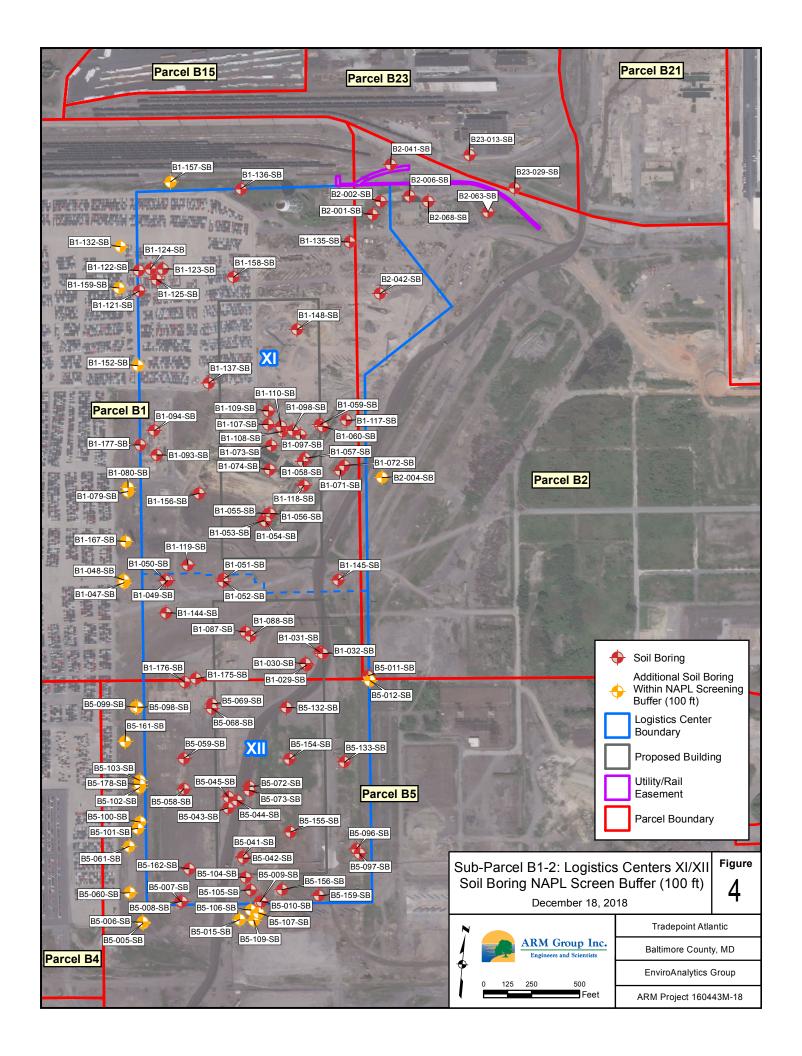


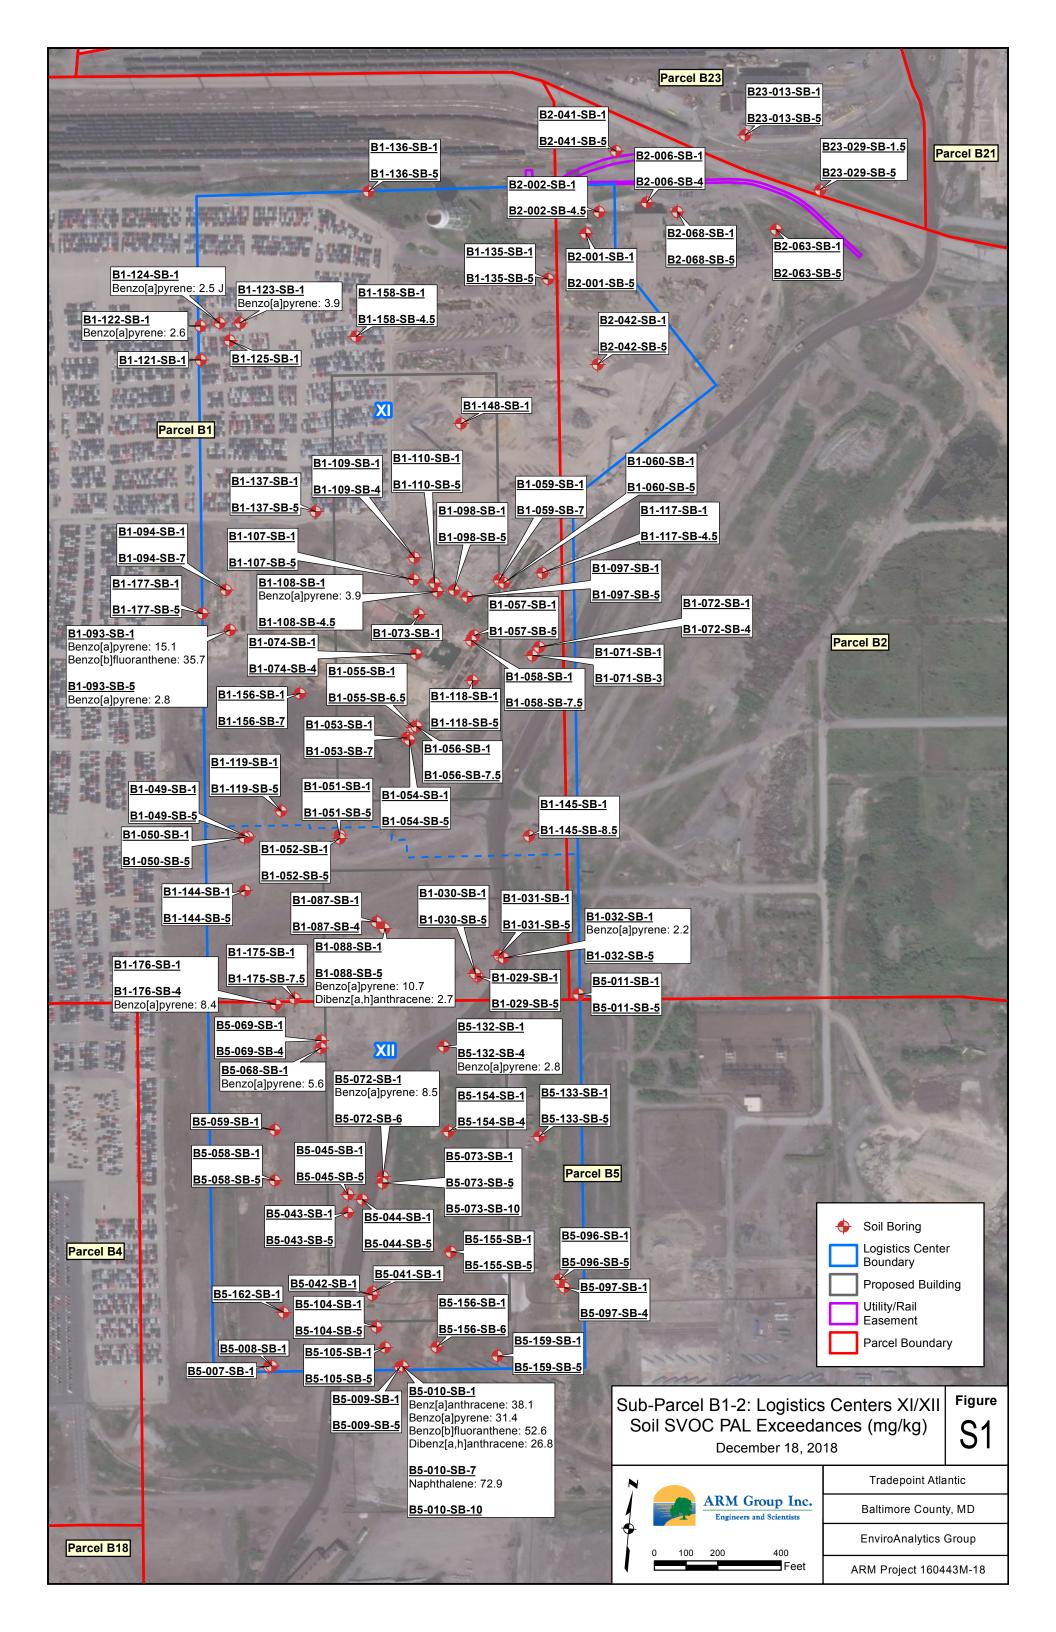


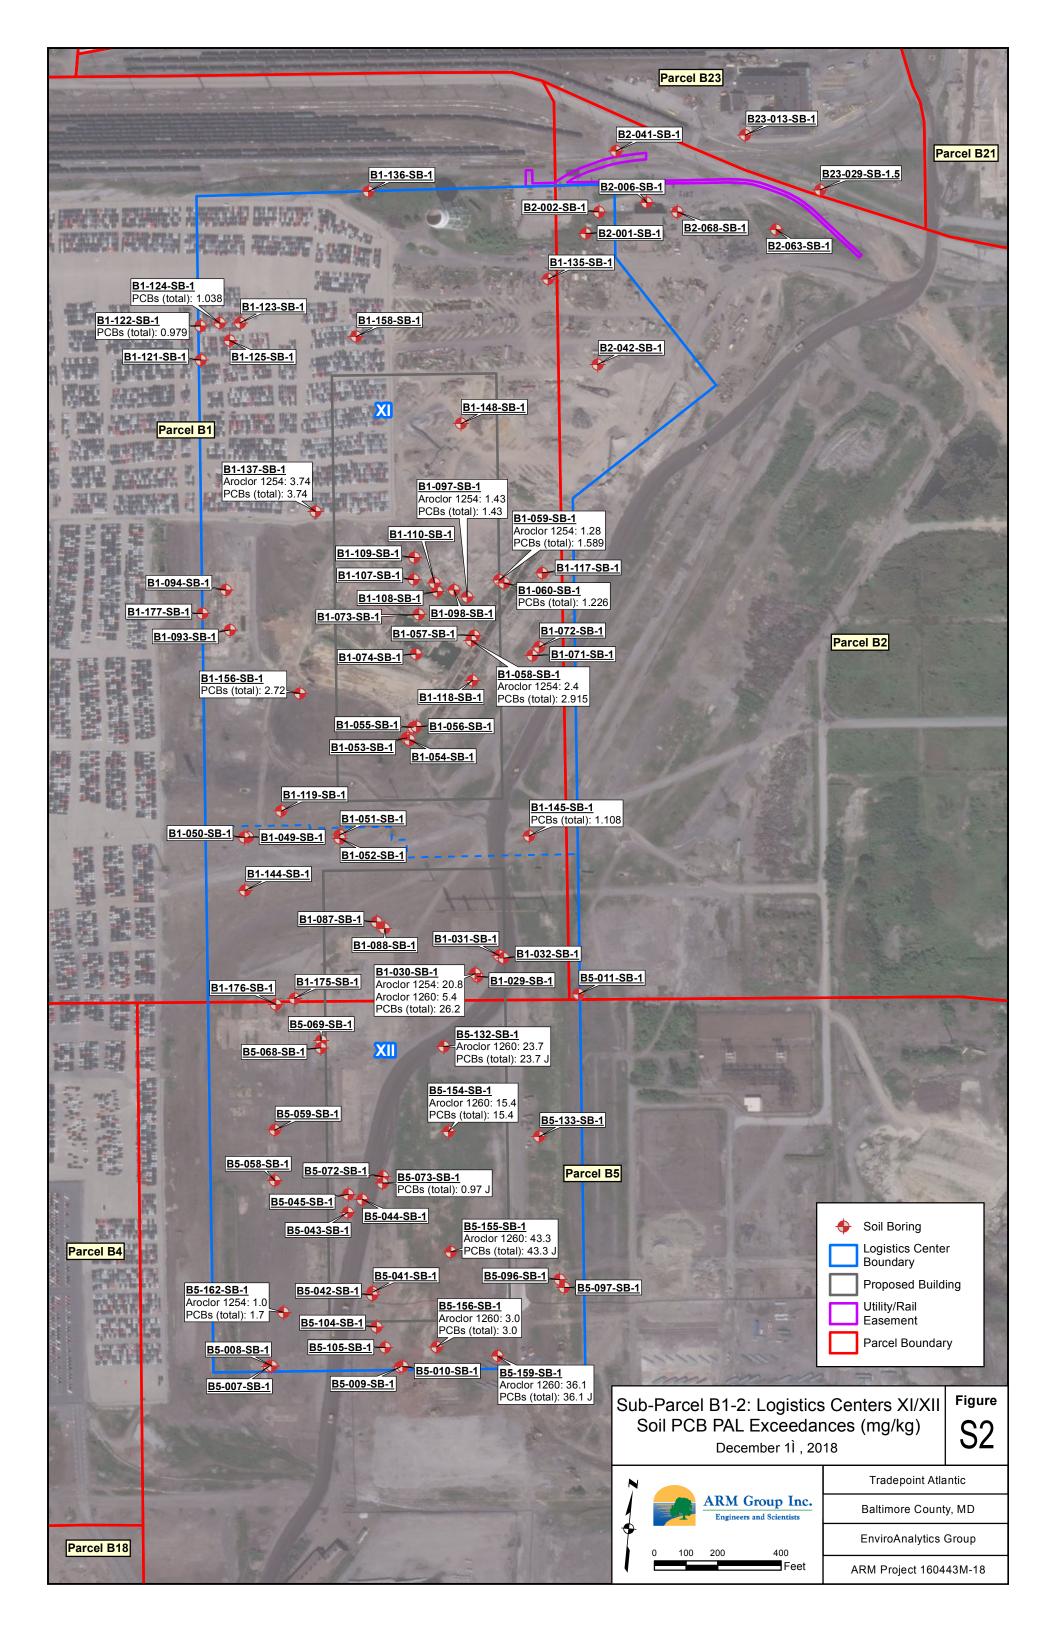


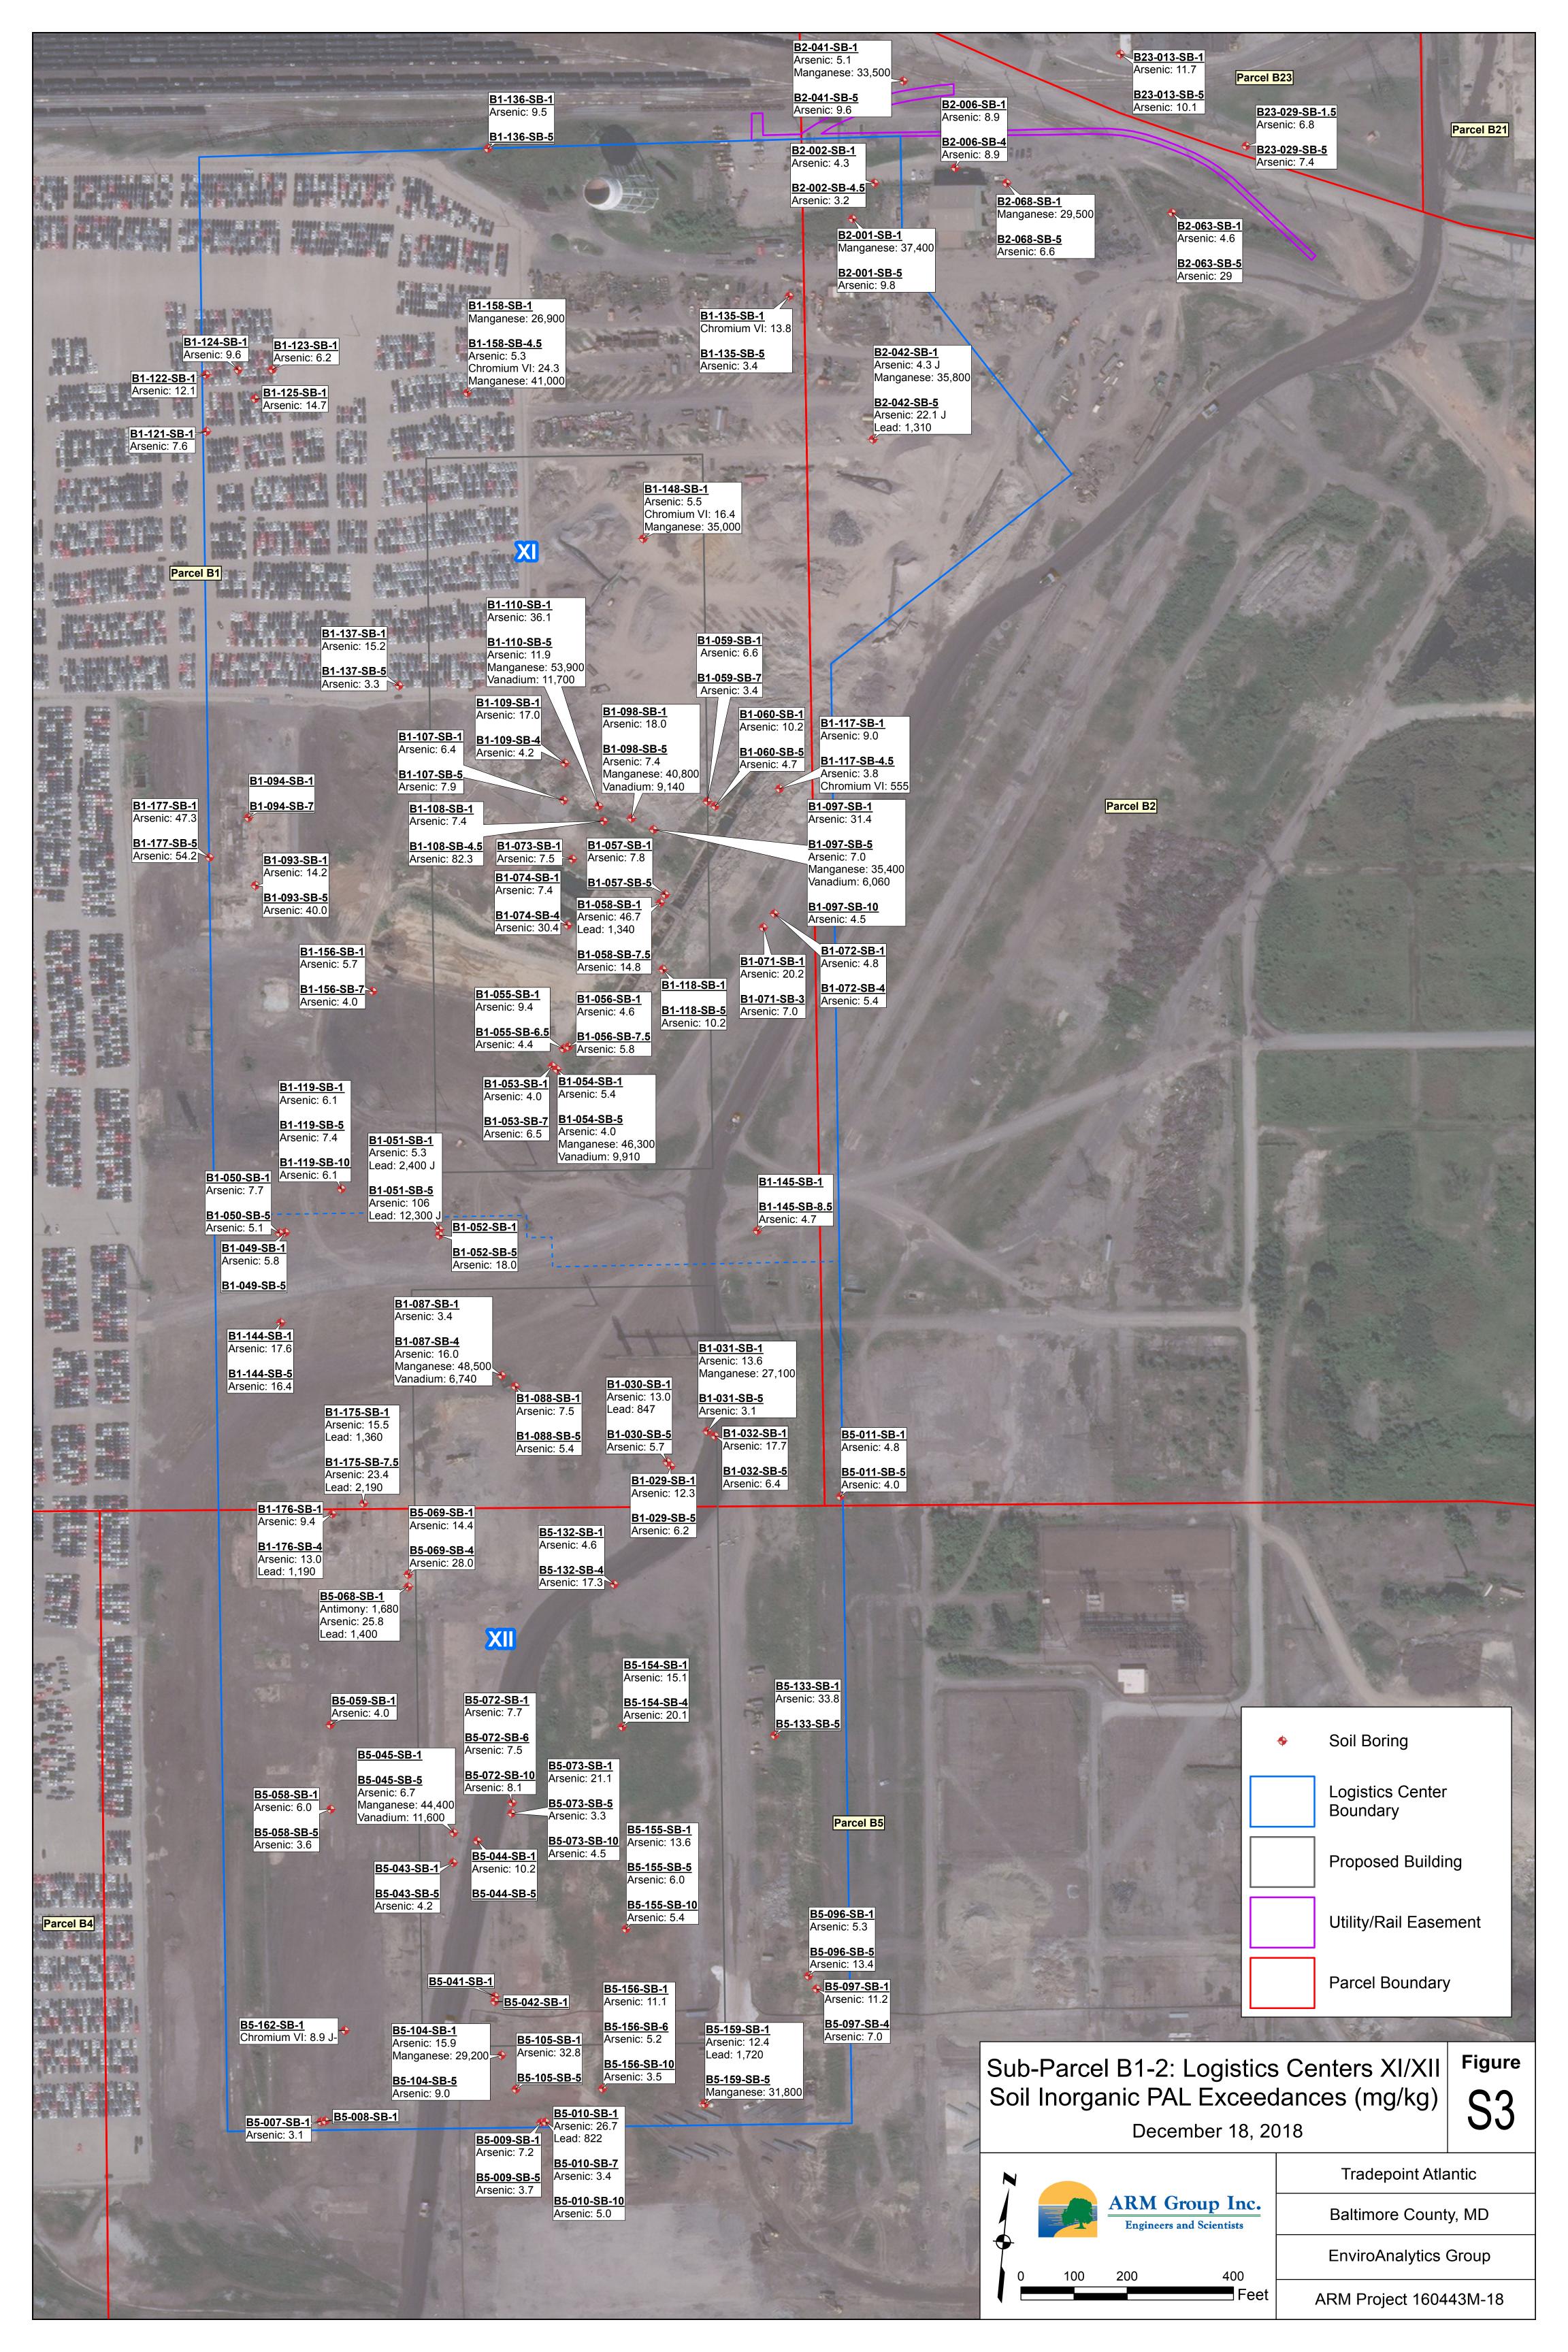


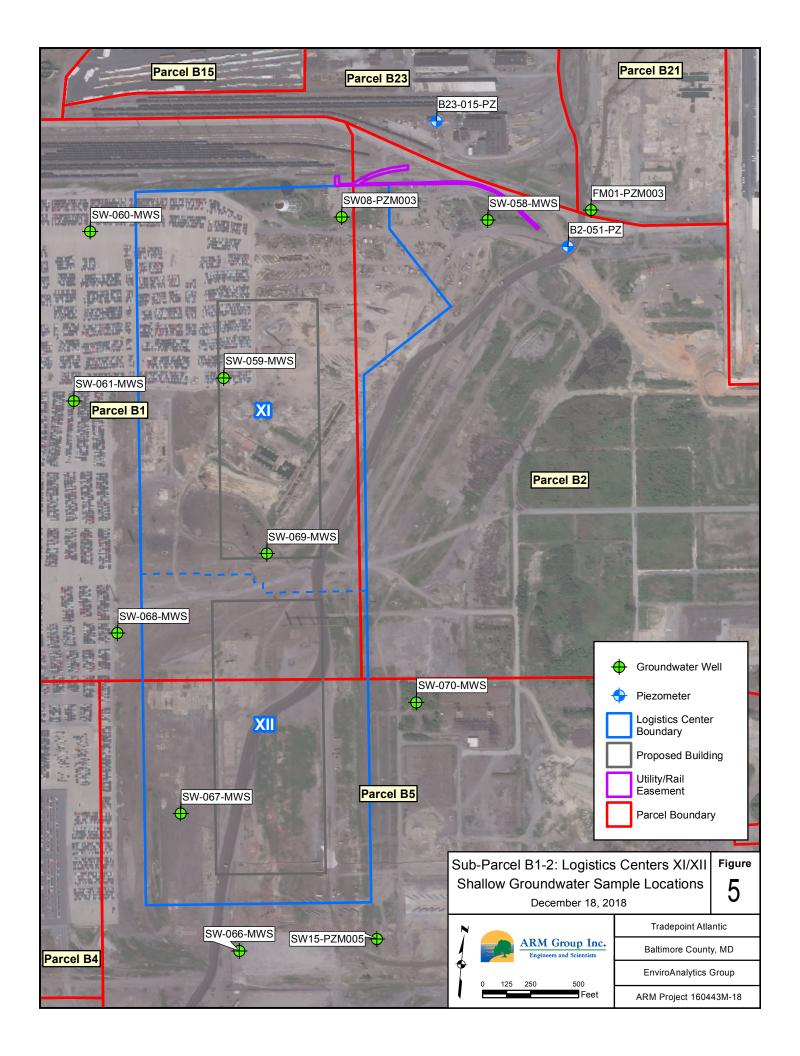


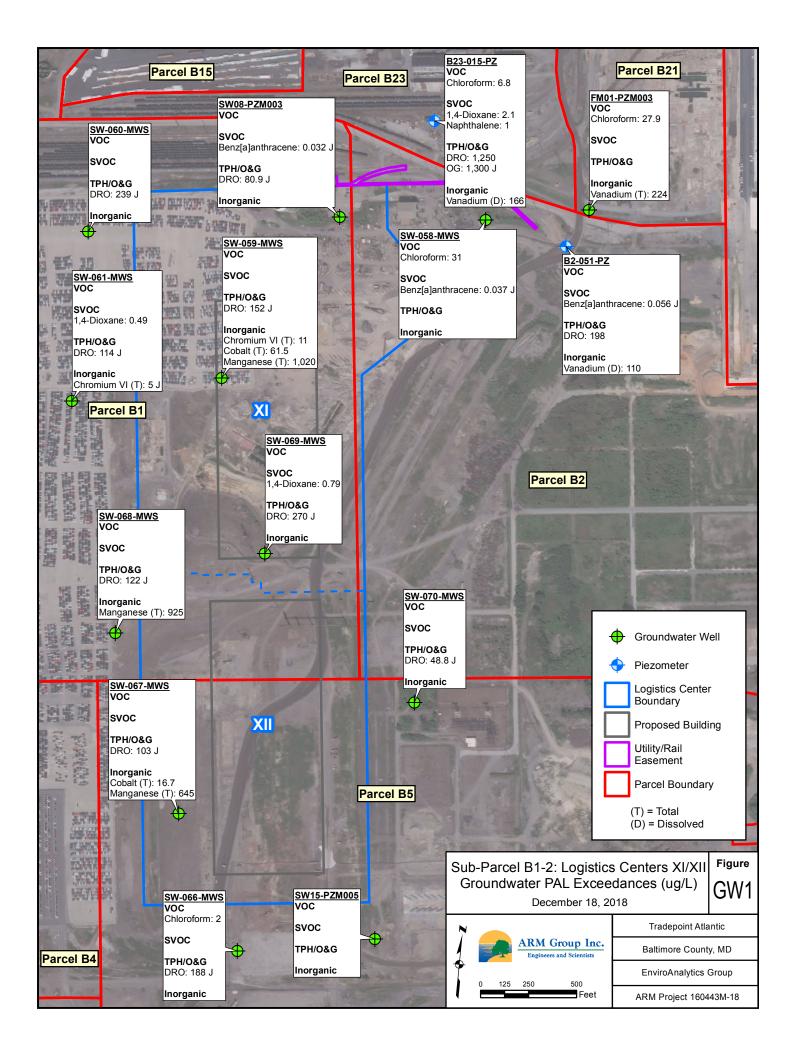

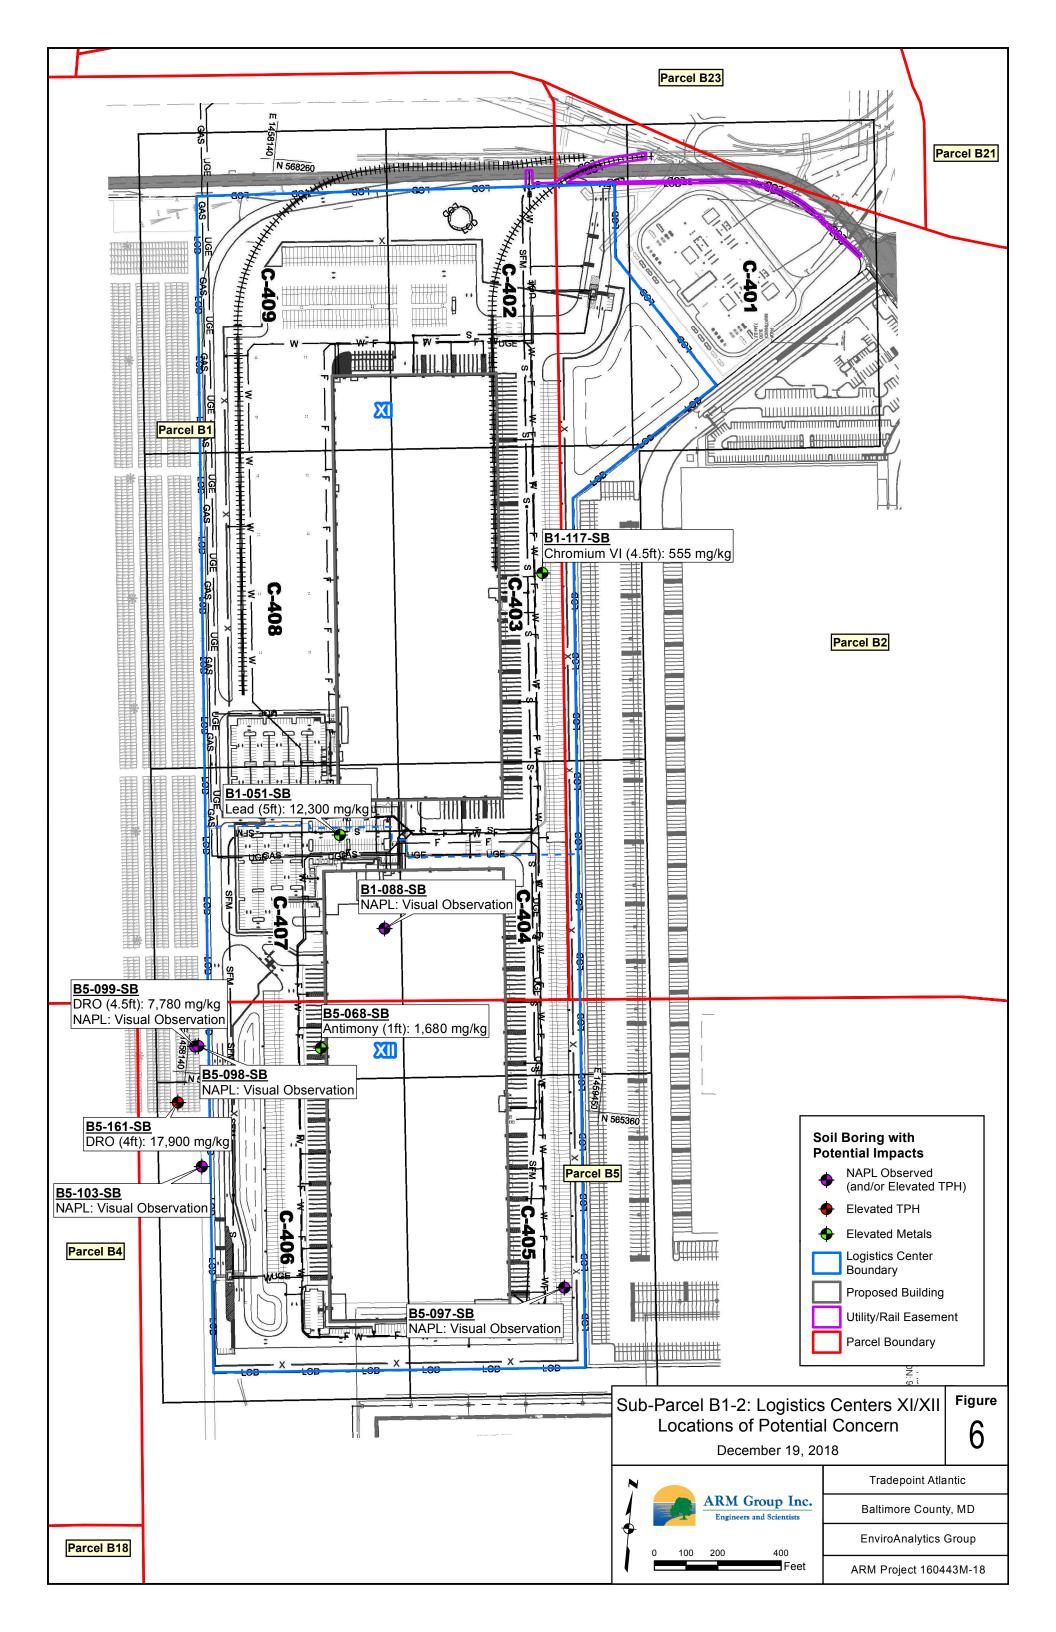

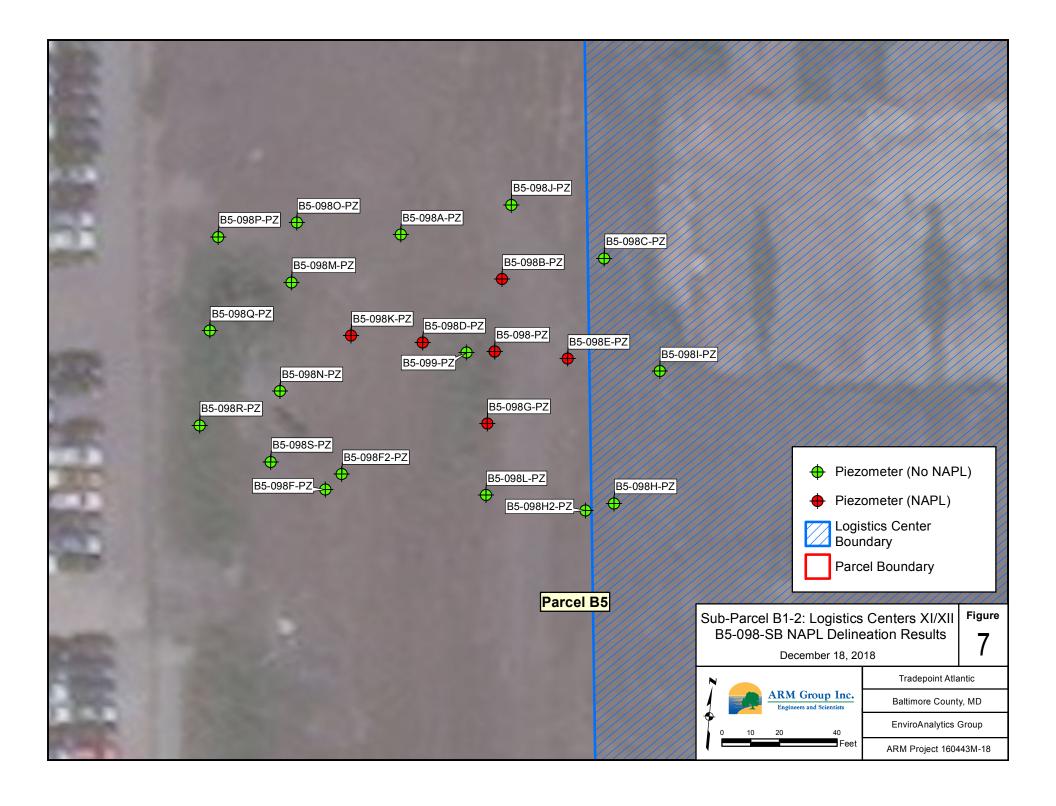

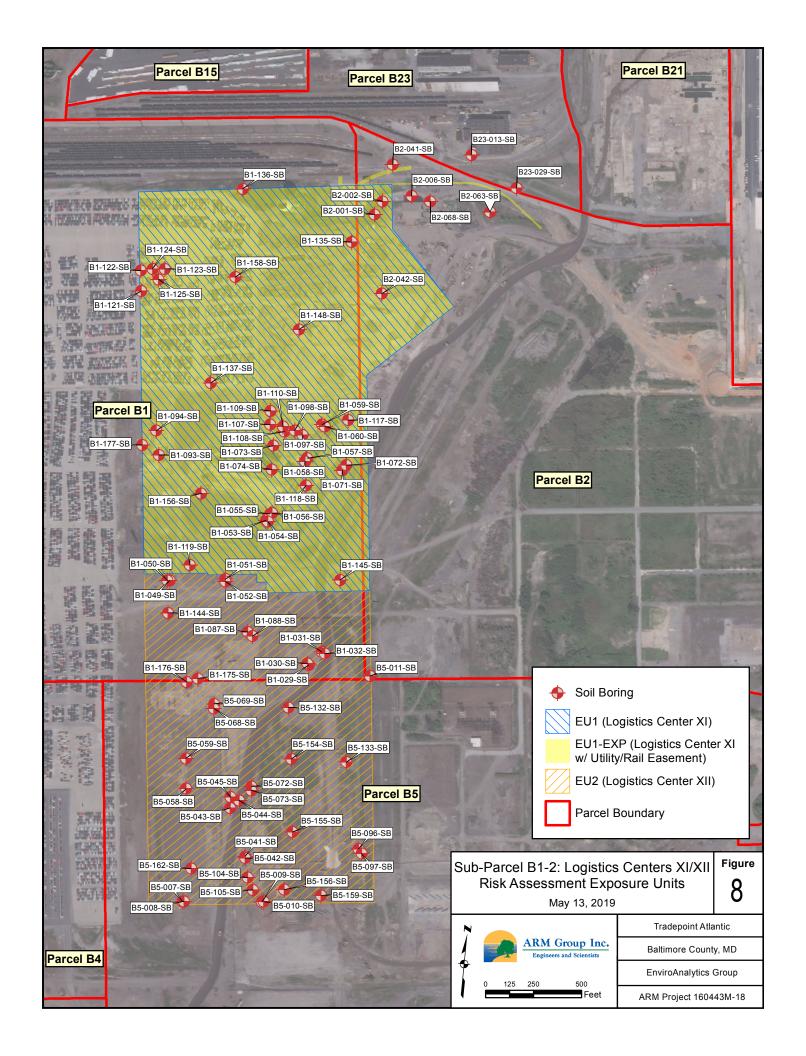

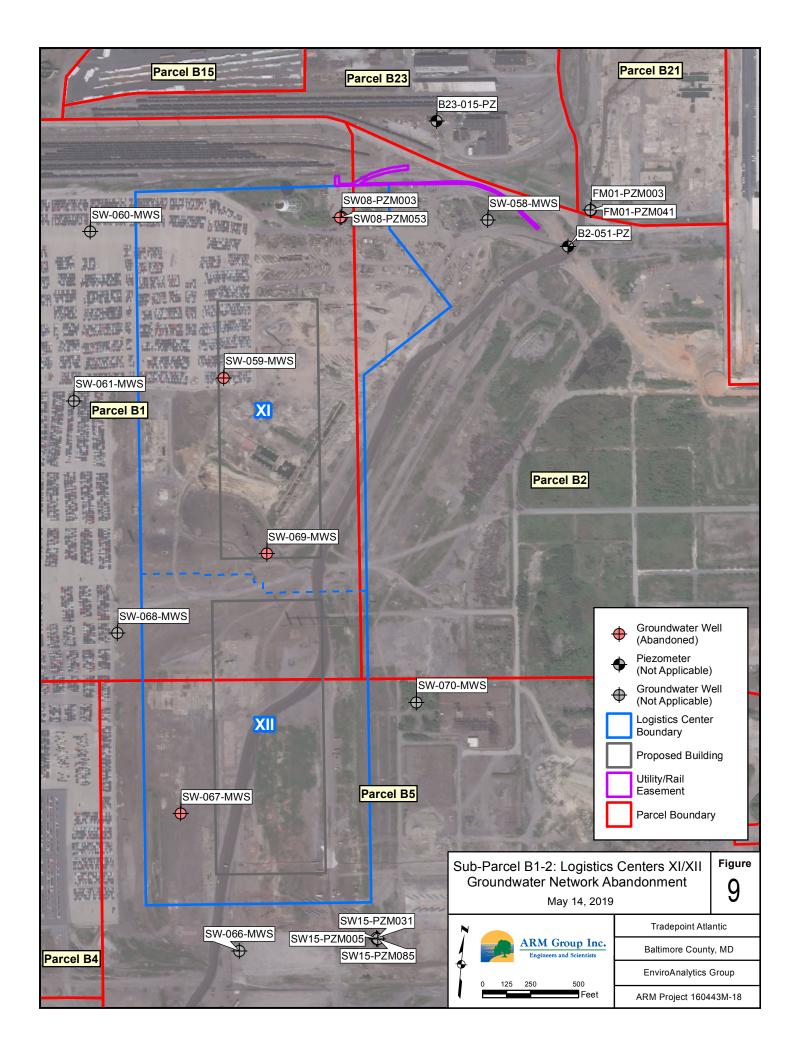

TABLES

Parameter	Units	PAL	B1-029-SB-1*	B1-029-SB-5*	B1-030-SB-1*	B1-030-SB-5*	B1-031-SB-1*	B1-031-SB-5*	B1-032-SB-1*
Volatile Organic Compounds			l	'					
1,1,1-Trichloroethane	mg/kg	36,000	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
1,1-Dichloroethane	mg/kg	16	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
2-Butanone (MEK)	mg/kg	190,000	0.0042 J	0.0089 U	0.0081 U	0.0092 U	0.0086 U	0.0094 U	0.0043 J
2-Hexanone	mg/kg	1,300	0.0073 U	0.0089 U	0.0081 U	0.0092 U	0.0086 U	0.0094 U	0.0094 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.0073 U	0.0089 U	0.0081 U	0.0092 U	0.0073 J	0.0094 U	0.0094 U
Acetone	mg/kg	670,000	0.0073 U	0.01	0.0061 J	0.011	0.01	0.013	0.015
Benzene	mg/kg	5.1	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0017 J	0.0019 J
Carbon tetrachloride	mg/kg	2.9	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
Cyclohexane	mg/kg	27,000	0.0073 U	0.0089 U	0.0081 U	0.0092 U	0.0086 U	0.0094 U	0.0094 U
Ethylbenzene	mg/kg	25	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0047	0.0047 U	0.0031 J
Methyl Acetate	mg/kg	1,200,000	0.036 U	0.045 U	0.041 U	0.046 U	0.043 U	0.047 U	0.047 U
Styrene	mg/kg	35,000	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
Tetrachloroethene	mg/kg	100	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
Toluene	mg/kg	47,000	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0032 J
Trichloroethene	mg/kg	6	0.0036 U	0.0045 U	0.0041 U	0.0046 U	0.0043 U	0.0047 U	0.0047 U
Xylenes	mg/kg	2,800	0.011 U	0.013 U	0.012 U	0.014 U	0.038	0.014 U	0.03
Semi-Volatile Organic Compoun	n -	200	0.051.11	0.050 11	0.024	0.00 11	0.071.11	0.05611	0.7
1,1-Biphenyl	mg/kg	200	0.071 U	0.078 U	0.034 J	0.08 U	0.071 U	0.076 U	0.5
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
2,4-Dimethylphenol	mg/kg	16,000	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
2,4-Dinitrophenol	mg/kg	1,600	0.18 U	0.2 U	0.19 U	0.2 U	0.18 U	0.19 U	0.18 U
2-Chloronaphthalene	mg/kg	60,000	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
2-Methylnaphthalene	mg/kg	3,000	0.017	0.012	0.063	0.0039 J	0.033	0.016	2.3
2-Methylphenol	mg/kg	41,000	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.14 U	0.16 U	0.15 U	0.16 U	0.02 J	0.15 U	0.14 U
4-Chloroaniline	mg/kg	11	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
Acenaphthene	mg/kg	45,000 45,000	0.0024 J	0.0023 J	0.075	0.001 J	0.0099	0.011	7.8
Acenaphthylene	mg/kg		0.0093	0.03	0.11	0.0067 J	0.038	0.011	0.093
Acetophenone Anthracene	mg/kg mg/kg	120,000 230,000	0.071 U	0.078 U 0.032	0.026 J 0.3	0.08 U	0.071 U	0.076 U	0.072 U
Benz[a]anthracene	mg/kg	230,000	0.013 0.036	0.032	0.66	0.0085 0.018	0.087 0.093	0.045 0.086	8.3 3.9
Benzaldehyde	mg/kg	120,000	0.030 0.071 U	0.078 U	0.039 J	0.08 U	0.071 U	0.076 U	0.072 U
Benzo[a]pyrene	mg/kg	2.1	0.071 0	0.078 0	0.039 3	0.08 0	0.071 0	0.070 0	2.2
Benzo[b]fluoranthene	mg/kg	21	0.11	0.14	1.3	0.043	0.3	0.16	3.7
Benzo[g,h,i]perylene	mg/kg	21	0.033	0.079	0.3	0.0097	0.082	0.052	0.45
Benzo[k]fluoranthene	mg/kg	210	0.12	0.29	1.3	0.044	0.31	0.16	1.4
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.077	0.078 U	0.57	0.08 U	0.22	0.076 U	0.18
Caprolactam	mg/kg	400,000	0.18 U	0.2 U	0.19 U	0.2 U	0.18 U	0.19 U	0.18 U
Carbazole	mg/kg	100,000	0.071 U	0.078 U	0.2	0.08 U	0.071 U	0.076 U	0.8
Chrysene	mg/kg	2,100	0.058	0.13	0.78	0.022	0.14	0.094	4.2
Dibenz[a,h]anthracene	mg/kg	2.1	0.011	0.031	0.099	0.0037 J	0.027	0.017	0.24
Di-n-butylphthalate	mg/kg	82,000	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
Di-n-ocytlphthalate	mg/kg	8,200	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
Fluoranthene	mg/kg	30,000	0.083	0.14	2.1	0.051	0.22	0.19	22.3
Fluorene	mg/kg	30,000	0.0033 J	0.0092	0.16	0.0024 J	0.0092	0.03	6.7
Hexachloroethane	mg/kg	8	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.031	0.084	0.31	0.011	0.075	0.048	0.57
Isophorone	mg/kg	2,400	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
Naphthalene	mg/kg	17	0.02	0.024	0.19	0.0069 J	0.03	0.29	4.4
N-Nitrosodiphenylamine	mg/kg	470	0.071 U	0.078 U	0.074 U	0.08 U	0.071 U	0.076 U	0.072 U
Phenanthrene	mg/kg		0.041	0.062	1.4	0.019	0.11	0.11	25.9
Phenol	mg/kg	250,000	0.071 U	0.078 U	0.023 J	0.08 U	0.071 U	0.076 U	0.072 U
Pyrene	mg/kg	23,000	0.079	0.12	1.8	0.044	0.28	0.17	16.8
PCBs									
Aroclor 1242	mg/kg	0.97	0.0557 U	N/A	0.573 U	N/A	0.0537 U	N/A	0.0586 U
Aroclor 1248	mg/kg	0.94	0.0557 U	N/A	0.573 U	N/A	0.0537 U	N/A	0.37
Aroclor 1254	mg/kg	0.97	0.0557 U	N/A	20.8	N/A	0.31	N/A	0.298
Aroclor 1260	mg/kg	0.99	0.102	N/A	5.4	N/A	0.115	N/A	0.195
Aroclor 1262	mg/kg		0.0557 U	N/A	0.573 U	N/A	0.0537 U	N/A	0.0586 U
Aroclor 1268	mg/kg		0.0557 U	N/A	0.573 U	N/A	0.0537 U	N/A	0.0586 U
PCBs (total)	mg/kg	0.97	0.102	N/A	26.2	N/A	0.425	N/A	0.863
TPH/Oil and Grease									
Diesel Range Organics	mg/kg	6,200	30.3	12.7	203	11.2	374	39.2	335
Gasoline Range Organics	mg/kg		9.3 U	9.3 U	8.7 U	9.6 U	6.2 J	9.5 U	10.9 U
Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

 $^{^{\}wedge}\,\textsc{PAH}$ compounds were analyzed via SIM

Parameter	Units	PAL	B1-032-SB-5*	B1-049-SB-1	B1-049-SB-5	B1-050-SB-1	B1-050-SB-5	B1-051-SB-1	B1-051-SB-5
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
1,1-Dichloroethane	mg/kg	16	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
2-Butanone (MEK)	mg/kg	190,000	0.0097 U	0.011 U	0.023 U	0.011 U	0.015 U	0.0096 U	0.013 U
2-Hexanone	mg/kg	1,300	0.0097 U	0.011 U	0.023 U	0.011 U	0.015 U	0.0096 U	0.013 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000 670,000	0.0097 U	0.011 U 0.011 UJ	0.023 U 0.023 UJ	0.011 U 0.011 UJ	0.015 U 0.015 UJ	0.0096 U 0.0096 UJ	0.013 U 0.013 UJ
Acetone Benzene	mg/kg mg/kg	5.1	0.014 0.0049 U	0.011 UJ 0.0054 U	0.023 UJ 0.011 U	0.011 UJ 0.0057 U	0.013 UJ 0.0073 U	0.0098 UJ 0.0048 U	0.013 UJ 0.0064 U
Carbon tetrachloride	mg/kg	2.9	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
Cyclohexane	mg/kg	27,000	0.0047 U	0.0034 C	0.023 U	0.0037 U	0.015 U	0.0096 U	0.0004 U
Ethylbenzene	mg/kg	25	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
Methyl Acetate		1,200,000	0.049 U	0.054 U	0.11 U	0.057 U	0.073 U	0.048 U	0.064 U
Styrene	mg/kg	35,000	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
Tetrachloroethene	mg/kg	100	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
Toluene	mg/kg	47,000	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
Trichloroethene	mg/kg	6	0.0049 U	0.0054 U	0.011 U	0.0057 U	0.0073 U	0.0048 U	0.0064 U
Xylenes	mg/kg	2,800	0.015 U	0.016 U	0.034 U	0.017 U	0.022 U	0.014 U	0.019 U
Semi-Volatile Organic Compoun	ds^								
1,1-Biphenyl	mg/kg	200	0.08 U	0.077 U	0.12 U	0.074 U	0.083 U	0.072 U	0.059 J
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.08 U	0.077 U	0.12 U	0.074 U	0.083 U	0.072 U	0.084 U
2,4-Dimethylphenol	mg/kg	16,000	0.08 U	0.077 U	0.12 U	0.074 U	0.083 U	0.072 U	0.084 U
2,4-Dinitrophenol	mg/kg	1,600	0.2 U	0.19 U	0.3 U	0.19 U	0.21 U	0.18 U	0.21 U
2-Chloronaphthalene	mg/kg	60,000	0.08 U	0.077 U	0.12 U	0.074 U	0.083 U	0.072 U	0.084 U
2-Methylnaphthalene	mg/kg	3,000	0.033	0.011	0.012 U	0.042	0.065	0.039	0.067
2-Methylphenol	mg/kg	41,000	0.08 U	0.077 U	0.12 U	0.074 U	0.083 U	0.072 U	0.084 U
3&4-Methylphenol(m&p Cresol) 4-Chloroaniline	mg/kg	41,000	0.16 U 0.08 U	0.15 U 0.077 U	0.24 U 0.12 U	0.15 U 0.074 U	0.17 U 0.083 U	0.14 U 0.072 U	0.05 J 0.084 U
Acenaphthene	mg/kg	45,000	0.08 0	0.077 U 0.0021 J	0.12 U	0.074 0	0.083 U 0.0062 J	0.072 U 0.0044 J	0.084 0
Acenaphthylene	mg/kg mg/kg	45,000	0.031	0.0021 3	0.012 U	0.012	0.0062 3	0.036	0.014
Acetophenone		120,000	0.03 0.08 U	0.031 0.077 U	0.012 U	0.074 U	0.018 0.083 U	0.030 0.072 U	0.016 0.025 J
Anthracene	mg/kg	230,000	0.15	0.077 0	0.0021 B	0.074 0	0.083 C	0.072 0	0.023 3
Benz[a]anthracene	mg/kg	21	0.17	0.12	0.0031 J	0.43	0.38	0.16	0.43
Benzaldehyde	mg/kg		0.08 U	0.077 R	0.12 R	0.074 R	0.083 R	0.072 R	0.019 J
Benzo[a]pyrene	mg/kg	2.1	0.17	0.22	0.0019 J	0.55	0.36	0.21	1.1 J
Benzo[b]fluoranthene	mg/kg	21	0.34	0.43 J	0.0053 J	1.2	0.89	0.47	1.9
Benzo[g,h,i]perylene	mg/kg		0.069	0.18	0.0029 J	0.17	0.3	0.19	0.45 J
Benzo[k]fluoranthene	mg/kg	210	0.34	0.44 J	0.0054 J	1.2	0.9	0.48	1.9
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.08 U	0.077 U	0.12 U	0.074 UJ	0.083 UJ	0.072 U	0.084 UJ
Caprolactam	mg/kg	400,000	0.2 U	0.19 U	0.3 U	0.19 U	0.21 U	0.18 U	0.21 U
Carbazole	mg/kg		0.038 J	0.077 U	0.12 U	0.074 U	0.044 J	0.072 U	0.33 J
Chrysene	mg/kg	2,100	0.18	0.13	0.0022 J	0.42	0.45	0.2	0.36
Dibenz[a,h]anthracene	mg/kg	2.1	0.026	0.054	0.012 U	0.076	0.13	0.067	0.16 J
Di-n-butylphthalate	mg/kg	82,000	0.08 U	0.077 U	0.12 U	0.074 U	0.083 U	0.072 U	0.084 U
Di-n-ocytlphthalate		0.000		0.055.11	O 10 T7	0.074 777	0.002 777	0 0 0 T T	0.004 ***
HILLOTONINANA	mg/kg	8,200	0.08 U	0.077 U	0.12 U	0.074 UJ	0.083 UJ	0.072 U	0.084 UJ
Fluoranthene	mg/kg	30,000	0.46	0.13	0.0029 B	0.61	0.6	0.23	0.63
Fluorene	mg/kg mg/kg	30,000 30,000	0.46 0.076	0.13 0.0052 J	0.0029 B 0.012 U	0.61 0.016	0.6 0.0079 J	0.23 0.0043 J	0.63 0.012
Fluorene Hexachloroethane	mg/kg mg/kg mg/kg	30,000 30,000 8	0.46 0.076 0.08 U	0.13 0.0052 J 0.077 U	0.0029 B 0.012 U 0.12 U	0.61 0.016 0.074 U	0.6 0.0079 J 0.083 U	0.23 0.0043 J 0.072 U	0.63 0.012 0.084 U
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene	mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21	0.46 0.076 0.08 U 0.079	0.13 0.0052 J 0.077 U 0.15	0.0029 B 0.012 U 0.12 U 0.0022 J	0.61 0.016 0.074 U 0.15	0.6 0.0079 J 0.083 U 0.31	0.23 0.0043 J 0.072 U 0.18	0.63 0.012 0.084 U 0.56 J
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone	mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400	0.46 0.076 0.08 U 0.079 0.08 U	0.13 0.0052 J 0.077 U 0.15 0.077 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U	0.61 0.016 0.074 U 0.15 0.074 U	0.6 0.0079 J 0.083 U 0.31 0.083 U	0.23 0.0043 J 0.072 U 0.18 0.072 U	0.63 0.012 0.084 U 0.56 J 0.084 U
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene	mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21	0.46 0.076 0.08 U 0.079	0.13 0.0052 J 0.077 U 0.15	0.0029 B 0.012 U 0.12 U 0.0022 J	0.61 0.016 0.074 U 0.15	0.6 0.0079 J 0.083 U 0.31	0.23 0.0043 J 0.072 U 0.18	0.63 0.012 0.084 U 0.56 J
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400	0.46 0.076 0.08 U 0.079 0.08 U 0.089	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine	mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U	0.61 0.016 0.074 U 0.15 0.074 U 0.041	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400 17 470	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400 17 470	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400 17 470	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.039	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37 N/A N/A N/A N/A	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B N/A N/A N/A N/A N/A N/A	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96 0.0557 U 0.0557 U 0.0557 U 0.0557 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46 N/A N/A N/A N/A N/A	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48 N/A N/A N/A N/A
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1262 Aroclor 1268	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37 N/A N/A N/A N/A N/A	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B N/A N/A N/A N/A N/A N/A N/A	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46 N/A N/A N/A N/A N/A N/A N/A	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48 N/A N/A N/A N/A
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total)	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37 N/A N/A N/A N/A	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B N/A N/A N/A N/A N/A N/A	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96 0.0557 U 0.0557 U 0.0557 U 0.0557 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46 N/A N/A N/A N/A N/A	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48 N/A N/A N/A N/A
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48 N/A N/A N/A N/A N/A N/A
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48 N/A N/A N/A N/A N/A N/A N/A
Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg	30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99 0.97 0.99	0.46 0.076 0.08 U 0.079 0.08 U 0.089 0.08 U 0.39 0.08 U 0.37 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.13 0.0052 J 0.077 U 0.15 0.077 U 0.015 0.077 U 0.039 0.077 U 0.21 J 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U 0.0609 U	0.0029 B 0.012 U 0.12 U 0.0022 J 0.12 U 0.0026 B 0.12 U 0.0026 B 0.12 U 0.003 B N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.61 0.016 0.074 U 0.15 0.074 U 0.041 0.074 U 0.15 0.074 UJ 0.96 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U 0.0557 U	0.6 0.0079 J 0.083 U 0.31 0.083 U 0.06 0.083 U 0.29 0.083 U 0.46 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.23 0.0043 J 0.072 U 0.18 0.072 U 0.03 0.072 U 0.11 0.072 U 0.23 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U 0.0597 U	0.63 0.012 0.084 U 0.56 J 0.084 U 0.17 0.084 U 0.42 0.054 J 0.48 N/A N/A N/A N/A N/A N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

 $^{^{\}wedge}$ PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-052-SB-1	B1-052-SB-5	B1-053-SB-1*	B1-053-SB-7*	B1-054-SB-1*	B1-054-SB-5*	B1-055-SB-1*
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
1,1-Dichloroethane	mg/kg	16	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
1,2,3-Trichlorobenzene	mg/kg	930	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
1,2,4-Trichlorobenzene	mg/kg	110	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
1,2-Dichlorobenzene	mg/kg	9,300	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
2-Butanone (MEK)	mg/kg	190,000	0.0099 U	0.012 U	0.0095 U	0.0097 U	0.0093 U	0.01 U	0.011 U
2-Hexanone	mg/kg	1,300	0.0099 U	0.012 U	0.0095 U	0.0097 U	0.0093 U	0.01 U	0.011 U
4-Methyl-2-pentanone (MIBK) Acetone	mg/kg mg/kg	56,000 670,000	0.0099 U 0.0099 UJ	0.012 U 0.012 UJ	0.0095 U 0.01	0.0097 U 0.0074 J	0.0093 U 0.011	0.01 U 0.01 U	0.011 U 0.011 U
Benzene	mg/kg	5.1	0.0099 UJ 0.005 U	0.012 UJ 0.0059 U	0.0047 U	0.0074 J 0.0033 J	0.011 0.0046 U	0.01 U	0.0011 U
Carbon tetrachloride	mg/kg	2.9	0.005 U	0.0059 U	0.0047 U	0.0033 J 0.0048 U	0.0046 U	0.0052 U	0.0057 U
Cyclohexane	mg/kg	27,000	0.009 U	0.012 U	0.0097 U	0.0097 U	0.0093 U	0.0032 C	0.011 U
Ethylbenzene	mg/kg	25	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
Methyl Acetate	mg/kg	1,200,000	0.05 U	0.059 U	0.047 U	0.048 U	0.046 U	0.052 U	0.057 U
Styrene	mg/kg	35,000	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
Tetrachloroethene	mg/kg	100	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
Toluene	mg/kg	47,000	0.005 U	0.0059 U	0.0047 U	0.0036 J	0.0046 U	0.0052 U	0.0057 U
Trichloroethene	mg/kg	6	0.005 U	0.0059 U	0.0047 U	0.0048 U	0.0046 U	0.0052 U	0.0057 U
Xylenes	mg/kg	2,800	0.015 U	0.018 U	0.014 U	0.015 U	0.014 U	0.015 U	0.017 U
Semi-Volatile Organic Compoun									
1,1-Biphenyl	mg/kg	200	0.073 U	0.061 J	0.07 U	0.079 U	0.072 U	0.075 U	0.021 J
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
2,4-Dimethylphenol	mg/kg	16,000	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
2,4-Dinitrophenol	mg/kg	1,600	0.18 U	0.2 U	0.18 U	0.2 U	0.18 U	0.19 U	0.19 U
2-Chloronaphthalene	mg/kg	60,000 3,000	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
2-Methylnaphthalene 2-Methylphenol	mg/kg mg/kg	41,000	0.02 0.073 U	0.18 0.08 U	0.026 0.07 U	0.098 0.079 U	0.021 0.072 U	0.02 0.075 U	0.13 0.074 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U 0.14 U	0.073 U	0.074 U
4-Chloroaniline	mg/kg	11	0.073 U	0.023 J	0.14 U	0.079 U	0.072 U	0.075 U	0.074 U
Acenaphthene	mg/kg	45,000	0.0031 J	0.015	0.002 J	0.0069 J	0.0051 J	0.012	0.01 B
Acenaphthylene	mg/kg	45,000	0.033	0.082	0.013	0.027	0.021	0.13	0.09
Acetophenone	mg/kg		0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Anthracene	mg/kg	230,000	0.052	0.16	0.029	0.056	0.038	0.14	0.089 B
Benz[a]anthracene	mg/kg	21	0.21	0.64	0.052	0.19	0.12	0.53	0.28
Benzaldehyde	mg/kg	120,000	0.073 R	0.063 J	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Benzo[a]pyrene	mg/kg	2.1	0.27 J	0.62	0.046	0.22	0.11	0.48	0.32
Benzo[b]fluoranthene	mg/kg	21	0.73 J	1.5	0.19	0.56	0.33	1.1	0.77
Benzo[g,h,i]perylene	mg/kg		0.12 J	0.42	0.02	0.074	0.06	0.11	0.29
Benzo[k]fluoranthene	mg/kg	210	0.7 J	1.5	0.19	0.58	0.34	1.1	0.79
bis(2-Ethylhexyl)phthalate Caprolactam	mg/kg	160 400,000	0.073 UJ 0.18 U	0.08 UJ 0.2 U	0.024 J 0.18 U	0.079 U 0.2 U	0.072 U 0.18 U	0.075 U 0.19 U	0.043 J 0.19 U
Carbazole	mg/kg mg/kg	400,000	0.18 U	0.2 U 0.1 J	0.18 U 0.07 U	0.2 U 0.026 J	0.18 U 0.072 U	0.19 U 0.026 J	0.19 U 0.037 J
Chrysene	mg/kg	2,100	0.073 0	0.1 5	0.076	0.020 3	0.072 0	0.020 3	0.037 3
Dibenz[a,h]anthracene	mg/kg	2.1	0.042 J	0.19	0.0068 J	0.23	0.024	0.06	0.099
Di-n-butylphthalate	mg/kg	82,000	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Di-n-ocytlphthalate	mg/kg	8,200	0.073 UJ	0.08 UJ	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Fluoranthene	mg/kg	30,000	0.25	1.1	0.13	0.36	0.27	1.1	0.43
Fluorene	mg/kg	30,000	0.0041 J	0.024	0.0019 J	0.0088	0.0052 J	0.019	0.011 B
Hexachloroethane	mg/kg	8	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.11 J	0.47	0.02	0.089	0.063	0.15	0.27
Isophorone	mg/kg	2,400	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Naphthalene	mg/kg	17	0.02	0.16	0.033	0.088	0.029	0.048	0.17 B
N-Nitrosodiphenylamine	mg/kg	470	0.073 U	0.08 U	0.07 U	0.079 U	0.072 U	0.075 U	0.074 U
Phenanthrene Phonal	mg/kg	250,000	0.081	0.7	0.081 0.07 U	0.21 0.079 U	0.16	0.31	0.22 B
Phenol Pyrana	mg/kg	250,000 23,000	0.073 U 0.25	0.08 U	0.07 U 0.12	0.079 U	0.072 U 0.23	0.075 U 0.9	0.074 U
Pyrene PCBs	mg/kg	23,000	0.25	0.86	U.12	0.3	0.23	บ.ร	0.4
					0.0539 U	N/A	0.0534 U	N/A	0.0557 U
	mø/ka	0.97	0.0573 II	N/A					
Aroclor 1242	mg/kg	0.97	0.0573 U 0.0573 U	N/A N/A					
Aroclor 1242 Aroclor 1248	mg/kg	0.94	0.0573 U	N/A	0.0539 U	N/A	0.0534 U	N/A	0.0557 U
Aroclor 1242 Aroclor 1248 Aroclor 1254	mg/kg mg/kg	0.94 0.97	0.0573 U 0.0573 U	N/A N/A	0.0539 U 0.0539 U	N/A N/A	0.0534 U 0.353	N/A N/A	0.0557 U 0.329
Aroclor 1242 Aroclor 1248	mg/kg	0.94	0.0573 U	N/A	0.0539 U	N/A	0.0534 U	N/A	0.0557 U
Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260	mg/kg mg/kg mg/kg	0.94 0.97 0.99	0.0573 U 0.0573 U 0.0573 U	N/A N/A N/A	0.0539 U 0.0539 U 0.0565	N/A N/A N/A	0.0534 U 0.353 0.123	N/A N/A N/A	0.0557 U 0.329 0.22
Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262	mg/kg mg/kg mg/kg mg/kg	0.94 0.97 0.99	0.0573 U 0.0573 U 0.0573 U 0.0573 U	N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0565 0.0539 U	N/A N/A N/A N/A	0.0534 U 0.353 0.123 0.0534 U	N/A N/A N/A N/A	0.0557 U 0.329 0.22 0.0557 U
Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268	mg/kg mg/kg mg/kg mg/kg	0.94 0.97 0.99	0.0573 U 0.0573 U 0.0573 U 0.0573 U 0.0573 U	N/A N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0565 0.0539 U 0.0539 U	N/A N/A N/A N/A N/A	0.0534 U 0.353 0.123 0.0534 U 0.0534 U	N/A N/A N/A N/A N/A	0.0557 U 0.329 0.22 0.0557 U 0.0557 U
Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	0.94 0.97 0.99 0.97	0.0573 U 0.0573 U 0.0573 U 0.0573 U 0.0573 U 0.0573 U 44.1	N/A N/A N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0565 0.0539 U 0.0539 U 0.0565	N/A N/A N/A N/A N/A N/A	0.0534 U 0.353 0.123 0.0534 U 0.0534 U 0.476	N/A N/A N/A N/A N/A N/A	0.0557 U 0.329 0.22 0.0557 U 0.0557 U 0.549
Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	0.94 0.97 0.99 0.97 6,200 6,200	0.0573 U 0.0573 U 0.0573 U 0.0573 U 0.0573 U 0.0573 U	N/A N/A N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0565 0.0539 U 0.0539 U 0.0565	N/A N/A N/A N/A N/A N/A	0.0534 U 0.353 0.123 0.0534 U 0.0534 U 0.476	N/A N/A N/A N/A N/A N/A	0.0557 U 0.329 0.22 0.0557 U 0.0557 U 0.549

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-055-SB-6.5*	B1-056-SB-1*	B1-056-SB-7.5*	B1-057-SB-1*	B1-057-SB-5*	B1-058-SB-1*
Volatile Organic Compounds								
1,1,1-Trichloroethane	mg/kg	36,000	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
1,1-Dichloroethane	mg/kg	16	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
2-Butanone (MEK)	mg/kg	190,000	0.0027 J	0.012 U	0.01 U	0.0087 U	0.017 U	0.0092 U
2-Hexanone	mg/kg	1,300	0.011 U	0.012 U	0.01 U	0.0087 U	0.017 U	0.0092 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.011 U	0.012 U	0.01 U	0.0087 U	0.017 U	0.0092 U
Acetone	mg/kg	670,000	0.02	0.012 U	0.018	0.0059 J	0.01 J	0.0092 U
Benzene	mg/kg	5.1	0.0023 J	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
Carbon tetrachloride	mg/kg	2.9	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
Cyclohexane	mg/kg	27,000	0.011 U	0.012 U	0.01 U	0.0087 U	0.017 U	0.0092 U
Ethylbenzene Methyl Acetate	mg/kg	25 1,200,000	0.0054 U 0.054 U	0.0059 U 0.059 U	0.005 U 0.05 U	0.0044 U 0.044 U	0.0086 U 0.086 U	0.0046 U 0.046 U
Styrene	mg/kg mg/kg	35,000	0.0054 U	0.039 U	0.03 U	0.044 U	0.086 U	0.046 U
Tetrachloroethene	mg/kg	100	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
Toluene	mg/kg	47,000	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
Trichloroethene	mg/kg	6	0.0054 U	0.0059 U	0.005 U	0.0044 U	0.0086 U	0.0046 U
Xylenes	mg/kg	2,800	0.016 U	0.0035 C	0.005 U	0.013 U	0.0060 U	0.014 U
Semi-Volatile Organic Compoun		-,555						
1,1-Biphenyl	mg/kg	200	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
2,4-Dimethylphenol	mg/kg	16,000	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
2,4-Dinitrophenol	mg/kg	1,600	0.2 U	0.18 U	0.2 U	0.19 U	0.2 U	0.95 U
2-Chloronaphthalene	mg/kg	60,000	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
2-Methylnaphthalene	mg/kg	3,000	0.026	0.016	0.032	0.058	0.0094	0.084
2-Methylphenol	mg/kg	41,000	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.16 U	0.15 U	0.16 U	0.16 U	0.16 U	0.76 U
4-Chloroaniline	mg/kg	11	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
Acenaphthene	mg/kg	45,000	0.012	0.0018 B	0.019	0.025	0.0027 J	0.077 U
Acenaphthylene	mg/kg	45,000	0.011	0.003 J	0.048	0.42	0.044	0.016 J
Acetophenone		120,000	0.081 U	0.073 U	0.082 U	0.035 J	0.082 U	0.38 U
Anthracene Benz[a]anthracene	mg/kg mg/kg	230,000	0.041 0.055	0.0075 B 0.026	0.062 0.12	0.19 0.62	0.099	0.021 J 0.046 J
Benzaldehyde	mg/kg	120,000	0.081 U	0.020 0.073 U	0.082 U	0.02 0.03 J	0.082 U	0.38 U
Benzo[a]pyrene	mg/kg	2.1	0.065	0.031	0.16	0.65	0.13	0.057 J
Benzo[b]fluoranthene	mg/kg	21	0.13	0.079	0.34	1.1	0.37	0.22
Benzo[g,h,i]perylene	mg/kg		0.044	0.023	0.12	0.26	0.033	0.061 J
Benzo[k]fluoranthene	mg/kg	210	0.13	0.081	0.35	0.58	0.38	0.22
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.081 U	0.073 U	0.082 U	0.016 J	0.082 U	1.1
Caprolactam	mg/kg	400,000	0.2 U	0.18 U	0.2 U	0.19 U	0.2 U	0.95 U
Carbazole	mg/kg		0.021 J	0.073 U	0.025 J	0.027 J	0.052 J	0.38 U
Chrysene	mg/kg	2,100	0.069	0.037	0.14	0.62	0.17	0.093
Dibenz[a,h]anthracene	mg/kg	2.1	0.018	0.0079	0.046	0.12	0.022	0.077 U
Di-n-butylphthalate	mg/kg	82,000	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
Di-n-ocytlphthalate	mg/kg	8,200	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
Fluoranthene	mg/kg	30,000	0.17	0.036	0.24	1.1	0.48	0.14
Fluorene	mg/kg	30,000	0.029	0.0025 B	0.042	0.034	0.01	0.0091 J
Hexachloroethane	mg/kg	8 21	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
Indeno[1,2,3-c,d]pyrene Isophorone	mg/kg mg/kg	2,400	0.042 0.081 U	0.021 0.073 U	0.13 0.082 U	0.28 0.078 U	0.045 0.082 U	0.031 J 0.38 U
Naphthalene	mg/kg	17	0.081 0	0.073 U 0.016 B	0.082	0.078 0	0.082 0	0.38 0
N-Nitrosodiphenylamine	mg/kg	470	0.044 0.081 U	0.010 B	0.082 U	0.14 0.078 U	0.082 U	0.38 U
Phenanthrene	mg/kg	770	0.081 0	0.073 C	0.082 0	0.078 0	0.082 0	0.38 0
Phenol	mg/kg	250,000	0.081 U	0.073 U	0.082 U	0.078 U	0.082 U	0.38 U
Pyrene	mg/kg	23,000	0.16	0.037	0.22	0.93	0.31	0.11
PCBs								
Aroclor 1242	mg/kg	0.97	N/A	0.054 U	N/A	0.0599 U	N/A	0.0567 U
Aroclor 1248	U 0	0.94	N/A	0.054 U	N/A	0.0599 U	N/A	0.0567 U
	mg/kg				27/4	0.0500.11		2.4
Aroclor 1254	mg/kg mg/kg	0.97	N/A	0.054 U	N/A	0.0599 U	N/A	2.4
			N/A N/A	0.054 U 0.0472 J	N/A N/A	0.0599 U 0.0599 U	N/A N/A	0.515
Aroclor 1254	mg/kg	0.97	N/A N/A	0.0472 J 0.054 U	N/A N/A		N/A N/A	0.515 0.0567 U
Aroclor 1254 Aroclor 1260	mg/kg mg/kg	0.97	N/A	0.0472 J	N/A	0.0599 U	N/A	0.515
Aroclor 1254 Aroclor 1260 Aroclor 1262	mg/kg mg/kg mg/kg	0.97	N/A N/A	0.0472 J 0.054 U	N/A N/A	0.0599 U 0.0599 U	N/A N/A	0.515 0.0567 U
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg	0.97 0.99 0.97	N/A N/A N/A N/A	0.0472 J 0.054 U 0.054 U 0.0472 J	N/A N/A N/A N/A	0.0599 U 0.0599 U 0.0599 U 0.0599 U	N/A N/A N/A N/A	0.515 0.0567 U 0.0567 U 2.915
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg mg/kg mg/kg mg/kg mg/kg	0.97 0.99 0.97	N/A N/A N/A N/A 30.7	0.0472 J 0.054 U 0.054 U 0.0472 J	N/A N/A N/A N/A	0.0599 U 0.0599 U 0.0599 U 0.0599 U	N/A N/A N/A N/A 31.3	0.515 0.0567 U 0.0567 U 2.915
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg	0.97 0.99 0.97	N/A N/A N/A N/A	0.0472 J 0.054 U 0.054 U 0.0472 J	N/A N/A N/A N/A	0.0599 U 0.0599 U 0.0599 U 0.0599 U	N/A N/A N/A N/A	0.515 0.0567 U 0.0567 U 2.915

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-058-SB-7.5*	B1-059-SB-1*	B1-059-SB-7*	B1-060-SB-1*	B1-060-SB-5*	B1-071-SB-1*	B1-071-SB-3*
Volatile Organic Compounds	•								
1,1,1-Trichloroethane	mg/kg	36,000	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
1,1-Dichloroethane	mg/kg	16	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
2-Butanone (MEK)	mg/kg	190,000	0.013 U	0.019 U	0.018 U	0.014 U	0.012 U	0.0087 U	0.0035 J
2-Hexanone	mg/kg	1,300	0.013 U	0.019 U	0.018 U	0.014 U	0.012 U	0.0087 U	0.0098 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.013 U	0.019 U	0.018 U	0.014 U	0.012 U	0.0087 U	0.0098 U
Acetone	mg/kg	670,000	0.019	0.019 U	0.018 U	0.014 U	0.012 U	0.0087 U	0.02
Benzene	mg/kg	5.1	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
Carbon tetrachloride	mg/kg	2.9	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
Cyclohexane	mg/kg	27,000	0.013 U	0.019 U	0.018 U	0.014 U	0.012 U	0.0087 U	0.0098 U
Ethylbenzene	mg/kg	25	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0018 J
Methyl Acetate	mg/kg	1,200,000	0.063 U	0.097 U	0.088 U	0.071 U	0.061 U	0.043 U	0.049 U
Styrene	mg/kg	35,000	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
Tetrachloroethene	mg/kg	100	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
Toluene Tricklamathona	mg/kg	47,000	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0019 J
Trichloroethene	mg/kg	6	0.0063 U	0.0097 U	0.0088 U	0.0071 U	0.0061 U	0.0043 U	0.0049 U
Xylenes	mg/kg	2,800	0.019 U	0.029 U	0.026 U	0.021 U	0.018 U	0.013 U	0.013 J
Semi-Volatile Organic Compoun		200	0.075.11	0.050 7	0.026	0.045	0.045	0.072.11	0.063.7
1,1-Biphenyl	mg/kg	200	0.075 U	0.058 J	0.026 J	0.047 J	0.045 J	0.072 U	0.062 J
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.075 U	0.076 U	0.072 U	0.076 U	0.075 U	0.072 U	0.073 U
2,4-Dimethylphenol	mg/kg	16,000	0.075 U	0.039 J	0.021 J	0.032 J	0.075 U	0.072 U	0.19
2,4-Dinitrophenol	mg/kg	1,600	0.19 U	0.19 U	0.18 U	0.19 U	0.19 U	0.18 U	0.18 U
2-Chloronaphthalene	mg/kg	60,000	0.075 U	0.11	0.47	0.092	0.075 U	0.072 U	0.073 U
2-Methylnaphthalene	mg/kg	3,000	0.027 0.075 U	0.36	0.074	0.48	0.19	0.017	0.51
2-Methylphenol 3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.075 U	0.04 J 0.081 J	0.028 J	0.039 J 0.094 J	0.075 U 0.15 U	0.072 U 0.14 U	0.073 U 0.15 U
4-Chloroaniline	mg/kg	11	0.13 U	0.081 J 0.076 U	0.069 J 0.072 U	0.094 J 0.076 U	0.13 U	0.14 U 0.072 U	0.13 U
Acenaphthene	mg/kg mg/kg	45,000	0.073 U	0.076 0	0.072 0	0.076 0	0.073 0	0.072 U 0.0027 J	0.073 0
Acenaphthylene	mg/kg	45,000	0.0038 3	0.039	0.0057 J	0.079	0.14	0.00273	0.049
Acetophenone	mg/kg	120,000	0.014 0.075 U	0.025 J	0.0037 J	0.042 0.034 J	0.14 0.075 U	0.011 0.072 U	0.049 0.066 J
Anthracene	mg/kg	230,000	0.045	0.023 3	0.072 0	0.32	1	0.019	0.31
Benz[a]anthracene	mg/kg	21	0.043	0.46	0.061	0.37	1.4	0.037	0.0073
Benzaldehyde	mg/kg	120,000	0.075 U	0.085	0.072 U	0.066 J	0.075 U	0.072 U	0.073 U
Benzo[a]pyrene	mg/kg	2.1	0.081	0.51	0.063	0.46	1.4	0.047	0.012
Benzo[b]fluoranthene	mg/kg	21	0.23	1.3	0.13	1.2	2.7	0.17	0.028
Benzo[g,h,i]perylene	mg/kg		0.036	0.16	0.02	0.097	0.31	0.028	0.011
Benzo[k]fluoranthene	mg/kg	210	0.24	1.2	0.12	1.2	0.88	0.17	0.029
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.075 U	0.07 J	0.072 U	0.044 J	0.075 U	0.17	0.073 U
Caprolactam	mg/kg	400,000	0.19 U	0.19 U	0.18 U	0.19 U	0.19 U	0.18 U	0.18 U
Carbazole	mg/kg		0.075 U	0.12	0.033 J	0.087	0.5	0.072 U	0.073 U
Chrysene	mg/kg	2,100	0.076	0.56	0.08	0.47	1.2	0.059	0.014
Dibenz[a,h]anthracene	mg/kg	2.1	0.012	0.077	0.011	0.055	0.12	0.011	0.0023 J
Di-n-butylphthalate	mg/kg	82,000	0.075 U	0.076 U	0.072 U	0.076 U	0.075 U	0.072 U	0.073 U
Di-n-ocytlphthalate	mg/kg	8,200	0.075 U	0.076 U	0.072 U	0.076 U	0.075 U	0.072 U	0.073 U
Fluoranthene	mg/kg	30,000	0.11	0.72	0.093	0.51	4.6	0.069	0.04
Fluorene	mg/kg	30,000	0.0047 J	0.049	0.012	0.054	0.53	0.0025 J	0.16
Hexachloroethane	mg/kg	8	0.075 U	0.076 U	0.072 U	0.076 U	0.075 U	0.072 U	0.073 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.032	0.17	0.019	0.1	0.34	0.029	0.0093
Isophorone	mg/kg	2,400	0.075 U	0.076 U	0.072 U	0.076 U	0.075 U	0.072 U	0.073 U
Naphthalene	mg/kg	17	0.035	0.32	0.036	0.27	0.25	0.014	0.054
N-Nitrosodiphenylamine	mg/kg	470	0.075 U	0.076 U	0.072 U	0.076 U	0.075 U	0.072 U	0.073 U
Phenanthrene	mg/kg		0.06	0.88	0.47	1.5	3.9	0.042	0.51
Phenol	mg/kg	250,000	0.075 U	0.042 J	0.072 U	0.054 J	0.075 U	0.072 U	0.073 U
Pyrene	mg/kg	23,000	0.11	0.67	0.11	0.51	3.6	0.066	0.13
PCBs						1	1		
Aroclor 1242	mg/kg	0.97	N/A	0.0556 U	N/A	0.0567 U	N/A	0.0549 U	N/A
Aroclor 1248	mg/kg	0.94	N/A	0.0556 U	N/A	0.344	N/A	0.11	N/A
Aroclor 1254	mg/kg	0.97	N/A	1.28	N/A	0.882	N/A	0.0549 U	N/A
Aroclor 1260	mg/kg	0.99	N/A	0.309	N/A	0.0567 U	N/A	0.105	N/A
Aroclor 1262	mg/kg		N/A	0.0556 U	N/A	0.0567 U	N/A	0.0549 U	N/A
Aroclor 1268	mg/kg	6.35	N/A	0.0556 U	N/A	0.0567 U	N/A	0.0549 U	N/A
DCD (to t t)	44		N 1 / A	1.589	N/A	1.226	N/A	0.215	N/A
PCBs (total)	mg/kg	0.97	N/A	1.307	IN/A	1.220	11/71	0.210	
TPH/Oil and Grease									
TPH/Oil and Grease Diesel Range Organics	mg/kg	6,200	244	171	124	262	303	82.1	1,510
TPH/Oil and Grease		6,200							

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-072-SB-1*	B1-072-SB-4*	B1-073-SB-1*	B1-074-SB-1*	B1-074-SB-4*	B1-087-SB-1*	B1-087-SB-4*
Volatile Organic Compounds	Omts	TAL	B1 0/2 SB 1	B1 0/2 8B 1	B1 073 SB 1	BI 071 SB 1	BI 071 SB 1	BI oor SB I	BI 007 SB 1
1,1,1-Trichloroethane	mg/kg	36,000	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
1,1-Dichloroethane	mg/kg	16	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
1,2,3-Trichlorobenzene	mg/kg	930	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
1,2,4-Trichlorobenzene	mg/kg	110	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
1,2-Dichlorobenzene	mg/kg	9,300	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
2-Butanone (MEK)	mg/kg	190,000	0.01 U	0.012 U	0.01 U	0.014 U	0.0093 U	0.0098 U	0.011 U
2-Hexanone	mg/kg	1,300	0.01 U	0.012 U	0.01 U	0.014 U	0.0093 U	0.0098 U	0.011 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.01 U	0.012 U	0.01 U	0.014 U	0.0093 U	0.0098 U	0.011 U
Acetone	mg/kg	670,000	0.0063 J	0.0069 J	0.017	0.014 J	0.0092 J	0.0098 U	0.009 J
Benzene	mg/kg	5.1	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
Carbon tetrachloride	mg/kg	2.9	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
Cyclohexane	mg/kg	27,000	0.01 U	0.012 U	0.01 U	0.014 U	0.0093 U	0.0098 U	0.011 U
Ethylbenzene	mg/kg	25	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
Methyl Acetate	mg/kg	1,200,000	0.05 U	0.059 U	0.052 U	0.07 U	0.047 U	0.049 U	0.054 U
Styrene Tetrachloroethene	mg/kg	35,000 100	0.005 U	0.0059 U	0.0052 U	0.007 U	0.0047 U	0.0049 U	0.0054 U
Toluene	mg/kg	47,000	0.005 U 0.005 U	0.0059 U 0.0059 U	0.0052 U 0.0052 U	0.007 U 0.007 U	0.0047 U 0.0047 U	0.0049 U 0.0049 U	0.0054 U 0.0054 U
Trichloroethene	mg/kg mg/kg	6	0.005 U	0.0059 U	0.0032 U 0.0052 U	0.007 U	0.0047 U	0.0049 U 0.0049 U	0.0034 U 0.0054 U
Xylenes	mg/kg	2,800	0.005 U	0.0039 U 0.018 U	0.0032 U 0.016 U	0.007 U	0.0047 U	0.0049 U	0.0034 U 0.016 U
Semi-Volatile Organic Compoun		۷,000	0.013 U	0.016 U	0.010 0	0.021 0	0.014 0	0.015 0	0.010 0
1,1-Biphenyl	mg/kg	200	0.071 U	0.015 J	0.11	0.016 J	0.081 U	0.035 J	0.026 J
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.071 U	0.013 J 0.071 U	0.073 U	0.074 U	0.081 U	0.033 J 0.076 U	0.020 J 0.071 U
2,4-Dimethylphenol	mg/kg	16,000	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.017 J
2,4-Dinitrophenol	mg/kg	1,600	0.18 U	0.18 U	0.18 U	0.19 U	0.2 U	0.19 U	0.18 U
2-Chloronaphthalene	mg/kg	60,000	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
2-Methylnaphthalene	mg/kg	3,000	0.015	0.097	0.057 J	0.018 J	0.012	0.13	0.12
2-Methylphenol	mg/kg	41,000	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.14 U	0.14 U	0.15 U	0.15 U	0.16 U	0.15 U	0.14 U
4-Chloroaniline	mg/kg	11	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
Acenaphthene	mg/kg	45,000	0.0029 J	0.04	0.062 J	0.014 J	0.0022 J	0.0093	0.042
Acenaphthylene	mg/kg	45,000	0.0074	0.008	0.11	0.38	0.042	0.01	0.018
Acetophenone	mg/kg		0.071 U	0.071 U	0.022 J	0.074 U	0.081 U	0.076 U	0.071 U
Anthracene	mg/kg	230,000	0.014	0.082	0.38	0.3	0.07	0.036	0.071
Benz[a]anthracene	mg/kg	21	0.028	0.0055 J	1.1	1.4	0.27	0.01	0.19
Benzaldehyde	mg/kg	120,000	0.071 U	0.071 U	0.038 J	0.074 U	0.081 U	0.076 U	0.071 U
Benzo[a]pyrene	mg/kg	2.1	0.024	0.0063 J	1.1	1.2	0.26	0.014	0.18
Benzo[b]fluoranthene	mg/kg	21	0.099	0.022	1.9	2.6	0.61	0.037	0.36
Benzo[g,h,i]perylene Benzo[k]fluoranthene	mg/kg	210	0.019	0.0037 J	0.62	0.62 2.7	0.14 0.62	0.016	0.073 0.37
bis(2-Ethylhexyl)phthalate	mg/kg mg/kg	160	0.1 0.017 J	0.023 0.071 U	0.27	0.2	0.02 0.081 U	0.038 0.084	0.071 U
Caprolactam	mg/kg	400,000	0.017 J	0.071 U	0.18 U	0.19 U	0.081 U	0.19 U	0.071 U
Carbazole	mg/kg	400,000	0.13 U	0.071 U	0.13	0.037 J	0.081 U	0.076 U	0.071 U
Chrysene	mg/kg	2,100	0.049	0.012	1.1	1.4	0.3	0.024	0.19
Dibenz[a,h]anthracene	mg/kg	2.1	0.0072 J	0.0012 J	0.22	0.23	0.06	0.0075 U	0.038
Di-n-butylphthalate	mg/kg	82,000	0.071 U	0.071 U	0.068 J	0.074 U	0.081 U	0.076 U	0.071 U
Di-n-ocytlphthalate	mg/kg	8,200	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
Fluoranthene	mg/kg	30,000	0.063	0.02	2.2	2.2	0.5	0.026	0.26
Fluorene	mg/kg	30,000	0.0025 J	0.038	0.061 J	0.029 J	0.0035 J	0.014	0.041
Hexachloroethane	mg/kg	8	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.017	0.0038 J	0.62	0.7	0.16	0.0069 J	0.082
Isophorone	mg/kg	2,400	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
Naphthalene	mg/kg	17	0.013	0.0093	0.17	0.063 J	0.024	0.043	0.031
N-Nitrosodiphenylamine	mg/kg	470	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
Phenanthrene	mg/kg	250.000	0.049	0.22	1.1	0.26	0.18	0.07	0.17
Phenol	mg/kg	250,000	0.071 U	0.071 U	0.073 U	0.074 U	0.081 U	0.076 U	0.071 U
Pyrene	mg/kg	23,000	0.054	0.043	2.2	2.4	0.49	0.066	0.23
PCBs	47 /1	0.07	0.0540.11	NT/A	0.052.11	0.054.11	NT/A	0.05411	NT/A
Aroclor 1242	mg/kg	0.97	0.0549 U	N/A	0.052 U	0.054 U	N/A	0.054 U	N/A
Aroclor 1248	mg/kg	0.94	0.15	N/A	0.052 U	0.312	N/A	0.054 U	N/A
Aroclor 1254	mg/kg	0.97 0.99	0.0912 0.105	N/A	0.393 0.162	0.054 U 0.147	N/A N/A	0.054 U	N/A N/A
Aroclor 1260 Aroclor 1262	mg/kg	0.99	0.105 0.0549 U	N/A N/A	0.162 0.052 U	0.147 0.054 U	N/A N/A	0.054 U 0.054 U	N/A N/A
Aroclor 1268	mg/kg mg/kg		0.0549 U 0.0549 U	N/A N/A	0.052 U 0.052 U	0.054 U	N/A N/A	0.054 U 0.054 U	N/A N/A
PCBs (total)	mg/kg mg/kg	0.97	0.0349 0	N/A N/A	0.032 0	0.034 0	N/A N/A	0.034 U 0.054 U	N/A
TPH/Oil and Grease	∥ mg/kg	U.7/	0.3404	1N/A	U.333	U.437	1N/A	0.034 U	IN/A
Diesel Range Organics	mg/kg	6,200	66.8	297	278	278	50.8	599	342
Gasoline Range Organics	mg/kg		10 U	12 U	12 U	14.3 U	11.3 U	12.6 U	12 U
	g/12	6,200		N/A	N/A	N/A	N/A	N/A	N/A
Oil and Grease	mg/kg	6 700	N/A	N/A	N/A	IN / A	N / A	IN / A	IN / A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

 $^{^{\}wedge}$ PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-088-SB-1*	B1-088-SB-5*	B1-093-SB-1*	B1-093-SB-5*	B1-094-SB-1*	B1-094-SB-7*	B1-097-SB-1*
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
1,1-Dichloroethane	mg/kg	16	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
2-Butanone (MEK)	mg/kg	190,000	0.0091 U	0.011 U	0.0033 J	0.01 U	0.023 U	0.027 U	0.0085 U
2-Hexanone	mg/kg	1,300	0.0091 U	0.011 U	0.012 U	0.01 U	0.023 U	0.027 U	0.0085 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.0091 U	0.011 U	0.012 U	0.01 U	0.023 U	0.027 U	0.0085 U
Acetone Benzene	mg/kg mg/kg	670,000 5.1	0.0091 U 0.0046 U	0.011 J 0.0057 U	0.024 0.0062 U	0.0053 J 0.0051 U	0.022 J 0.011 U	0.032 0.013 U	0.0085 U 0.0043 U
Carbon tetrachloride	mg/kg	2.9	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
Cyclohexane	mg/kg	27,000	0.0046 U 0.0091 U	0.0037 U 0.011 U	0.002 U	0.0031 U	0.011 U	0.013 U 0.027 U	0.0045 U
Ethylbenzene	mg/kg	25	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
Methyl Acetate	mg/kg	1,200,000	0.046 U	0.057 U	0.062 U	0.051 U	0.11 U	0.13 U	0.043 U
Styrene	mg/kg	35,000	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
Tetrachloroethene	mg/kg	100	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
Toluene	mg/kg	47,000	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
Trichloroethene	mg/kg	6	0.0046 U	0.0057 U	0.0062 U	0.0051 U	0.011 U	0.013 U	0.0043 U
Xylenes	mg/kg	2,800	0.014 U	0.017 U	0.019 U	0.015 U	0.034 U	0.04 U	0.013 U
Semi-Volatile Organic Compoun									
1,1-Biphenyl	mg/kg	200	0.073 U	0.35	0.027 J	0.086 U	0.11 U	0.04 J	0.073 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
2,4-Dimethylphenol	mg/kg	16,000	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.02 J	0.073 U
2,4-Dinitrophenol	mg/kg	1,600	0.18 U	0.18 U	0.21 U	0.22 U	0.27 U	0.25 U	0.18 U
2-Chloronaphthalene	mg/kg	60,000	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
2-Methylnaphthalene	mg/kg	3,000	0.041	0.49	0.12 0.083 U	0.13 0.086 U	0.011 U	0.11 0.1 U	0.03 0.073 U
2-Methylphenol 3&4-Methylphenol(m&p Cresol)	mg/kg mg/kg	41,000	0.073 U 0.15 U	0.025 J 0.1 J	0.083 U 0.17 U	0.086 U 0.17 U	0.11 U 0.21 U	0.1 U 0.052 J	0.073 U 0.15 U
4-Chloroaniline	mg/kg	11	0.13 U	0.073 U	0.17 U	0.17 U 0.086 U	0.21 U	0.032 J 0.1 U	0.13 U
Acenaphthene	mg/kg	45,000	0.073 J	2.1	0.89	0.032	0.11 U	0.35	0.073 0
Acenaphthylene	mg/kg	45,000	0.061	0.22	0.19	0.52	0.001 J	0.032	0.014
Acetophenone	mg/kg		0.073 U	0.097	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
Anthracene	mg/kg	230,000	0.045	7.2	3.3	0.8	0.0023 B	0.7	0.24
Benz[a]anthracene	mg/kg	21	0.14	11.4	12.3	2.7	0.0037 J	1.3	0.98
Benzaldehyde	mg/kg	120,000	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.21	0.073 U
Benzo[a]pyrene	mg/kg	2.1	0.19	10.7	15.1	2.8	0.0021 J	1.2	0.96
Benzo[b]fluoranthene	mg/kg	21	0.36	18	35.7	5.6	0.0052 J	3.2	2.4
Benzo[g,h,i]perylene	mg/kg		0.14	7	5.6	1.1	0.0017 J	0.42	0.44
Benzo[k]fluoranthene	mg/kg	210	0.37	18.5	36	5.7	0.0053 J	3.3	2.5
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.94	0.073 U
Caprolactam	mg/kg	400,000	0.18 U	0.18 U	0.21 U	0.22 U	0.27 U	0.25 U	0.18 U
Carbazole	mg/kg	2,100	0.073 U	3.7 11.3	3.2	0.17 2.7	0.11 U	0.86	0.27
Chrysene Dibenz[a,h]anthracene	mg/kg mg/kg	2,100	0.15 0.051	2.7	12.4	0.56	0.0034 J 0.011 U	1.4 0.18	0.98 0.2
Di-n-butylphthalate	mg/kg	82,000	0.073 U	0.31	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
Di-n-ocytlphthalate	mg/kg	8,200	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
Fluoranthene	mg/kg	30,000	0.19	27.1	45.3	5.1	0.0076 B	4.8	2.3
Fluorene	mg/kg	30,000	0.0042 J	2.1	0.65	0.1	0.011 U	0.28	0.051
Hexachloroethane	mg/kg	8	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.14	6.9	6.2	1.4	0.011 U	0.46	0.48
Isophorone	mg/kg	2,400	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
Naphthalene	mg/kg	17	0.038	0.88	0.33	0.46	0.0017 B	0.27	0.037
N-Nitrosodiphenylamine	mg/kg	470	0.073 U	0.073 U	0.083 U	0.086 U	0.11 U	0.1 U	0.073 U
Phenanthrene	mg/kg	250.00	0.079	18.5	14.7	1.7	0.011 B	3.5	0.95
Phenol	mg/kg	250,000	0.073 U	0.046 J	0.083 U	0.086 U	0.11 U	0.072 J	0.073 U
Pyrene	mg/kg	23,000	0.2	22.4	40.1	4.1	0.0043 B	5.4	2
PCBs	ar - /1	0.07	0.0550.11	NT/A	0.0640.11	NT/A	0.0762.11	NT/A	0.0552.11
Aroclor 1242	mg/kg	0.97	0.0552 U 0.0552 U	N/A N/A	0.0648 U 0.0648 U	N/A N/A	0.0762 U 0.0762 U	N/A N/A	0.0553 U 0.0553 U
Aroclor 1248 Aroclor 1254	mg/kg mg/kg	0.94 0.97	0.0552 U 0.0552 U	N/A N/A	0.0648 U 0.0577 J	N/A N/A	0.0762 U 0.0762 U	N/A N/A	1.43
Aroclor 1254 Aroclor 1260	mg/kg mg/kg	0.97	0.0552 U 0.0552 U	N/A N/A	0.0577 J 0.0648 U	N/A N/A	0.0762 U 0.0762 U	N/A N/A	0.0553 U
Aroclor 1262	mg/kg	0.99	0.0552 U	N/A	0.0048 0	N/A	0.0762 U	N/A	0.0553 U
Aroclor 1268	mg/kg		0.0552 U	N/A	0.0648 U	N/A	0.0762 U	N/A	0.0553 U
PCBs (total)	mg/kg	0.97	0.0552 U	N/A	0.2097	N/A	0.0762 U	N/A	1.43
TPH/Oil and Grease	o o								
Diesel Range Organics	mg/kg	6,200	45.5	1,950	359	109	8.8 J	390	106
Gasoline Range Organics	mg/kg		10.7 U	29.8	13.7 U	14.4 U	23.5 U	24.6 U	9.7 U
Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	N/A	N/A
			•	•	•	-	•	-	-

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-097-SB-5*	B1-098-SB-1*	B1-098-SB-5*	B1-107-SB-1*	B1-107-SB-5*	B1-108-SB-1*	B1-108-SB-4.5*
Volatile Organic Compounds	Cints	TILE	B1 077 BB 3	B1 070 5B 1	B1 070 5B 3	B1 107 BB 1	B1 107 5B 3	B1 100 5B 1	B1 100 5B 115
1,1,1-Trichloroethane	mg/kg	36,000	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
1,1-Dichloroethane	mg/kg	16	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
2-Butanone (MEK)	mg/kg	190,000	0.013 U	0.012 U	0.0097 U	0.009 U	0.0062 U	0.0093 U	0.0095 U
2-Hexanone	mg/kg	1,300	0.013 U	0.012 U	0.0097 U	0.009 U	0.0062 U	0.0093 U	0.0095 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.013 U	0.012 U	0.0097 U	0.009 U	0.0062 U	0.0093 U	0.0095 U
Acetone	mg/kg	670,000	0.01 J	0.012 U	0.0093 J	0.014	0.0062 U	0.0093 U	0.0095 U
Benzene	mg/kg	5.1	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Carbon tetrachloride	mg/kg	2.9	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Cyclohexane	mg/kg	27,000	0.013 U	0.012 U	0.0097 U	0.009 U	0.0062 U	0.0093 U	0.0095 U
Ethylbenzene	mg/kg	25	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Methyl Acetate	mg/kg	1,200,000	0.065 U	0.058 U	0.049 U	0.045 U	0.031 U	0.046 U	0.048 U
Styrene	mg/kg	35,000	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Tetrachloroethene	mg/kg	100	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Toluene	mg/kg	47,000	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Trichloroethene	mg/kg	2 800	0.0065 U	0.0058 U	0.0049 U	0.0045 U	0.0031 U	0.0046 U	0.0048 U
Xylenes	mg/kg	2,800	0.02 U	0.017 U	0.015 U	0.013 U	0.0093 U	0.014 U	0.014 U
Semi-Volatile Organic Compoun		200	0.072.11	0.072.11	0.007.7	0.010 7	0.072.11	0.07 U	0.074 1
1,1-Biphenyl 1,2,4,5-Tetrachlorobenzene	mg/kg mg/kg	350	0.073 U 0.073 U	0.072 U 0.072 U	0.067 J 0.076 U	0.019 J 0.071 U	0.073 U 0.073 U	0.07 U	0.074 J 0.076 U
2,4-Dimethylphenol		16,000	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
2,4-Dinitrophenol	mg/kg mg/kg	1,600	0.073 U 0.18 U	0.072 U 0.18 U	0.021 J 0.19 U	0.071 U 0.18 U	0.073 U 0.18 U	0.07 U 0.18 U	0.076 U
2-Chloronaphthalene	mg/kg	60,000	0.18 U	0.13 U	0.19 U	0.13 U	0.18 U	0.18 U	0.19 U
2-Methylnaphthalene	mg/kg	3,000	0.0023 J	0.0067 J	0.39	0.058	0.025	0.016	0.071
2-Methylphenol	mg/kg	41,000	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.15 U	0.14 U	0.15 U	0.14 U	0.15 U	0.14 U	0.15 U
4-Chloroaniline	mg/kg	11	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
Acenaphthene	mg/kg	45,000	0.0074 U	0.003 J	0.072	0.015	0.009	0.0058 J	0.01
Acenaphthylene	mg/kg	45,000	0.0048 J	0.0019 J	0.064	0.33	0.24	0.093	0.015
Acetophenone		120,000	0.073 U	0.072 U	0.044 J	0.071 U	0.073 U	0.07 U	0.019 J
Anthracene	mg/kg	230,000	0.0045 J	0.01	0.32	0.6	0.38	0.2	0.013
Benz[a]anthracene	mg/kg	21	0.011	0.017	1.1	0.7	1	2.1	0.0076 J
Benzaldehyde	mg/kg	120,000	0.073 U	0.04 J	0.11	0.016 J	0.073 U	0.07 U	0.056 J
Benzo[a]pyrene	mg/kg	2.1	0.015	0.022	1.3	0.71	1.1	3.9	0.0044 J
Benzo[b]fluoranthene	mg/kg	21	0.037	0.056	3	2.1	2.4	7.5	0.015
Benzo[g,h,i]perylene	mg/kg		0.01	0.021	0.73	0.32	0.42	2.8	0.0032 J
Benzo[k]fluoranthene	mg/kg	210	0.038	0.057	3.1	2.1	2.4	7.7	0.015
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.073 U	0.29	0.076 U	0.12	0.12	0.017 J	0.09
Caprolactam	mg/kg	400,000	0.18 U	0.18 U	0.19 U	0.18 U	0.18 U	0.18 U	0.19 U
Carbazole	mg/kg	2.100	0.073 U	0.072 U	0.092	0.065 J	0.026 J	0.044 J	0.076 U
Chrysene	mg/kg	2,100	0.013	0.043	1.2 0.34	0.89	1.2 0.19	2.6 0.6	0.024
Dibenz[a,h]anthracene Di-n-butylphthalate	mg/kg mg/kg	82,000	0.0038 J 0.073 U	0.0071 J 0.072 U	0.076 U	0.12 0.071 U	0.19 0.073 U	0.07 U	0.0079 U 0.024 J
Di-n-ocytlphthalate	mg/kg	8,200	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
Fluoranthene	mg/kg	30,000	0.017	0.042	2.2	0.99	1.1	1.1	0.057
Fluorene	mg/kg	30,000	0.00086 J	0.042 0.003 J	0.06	0.017	0.017	0.01	0.0097
Hexachloroethane	mg/kg	8	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.01	0.011	0.82	0.33	0.5	2.8	0.002 J
Isophorone	mg/kg	2,400	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
Naphthalene	mg/kg	17	0.0036 J	0.012	0.25	0.051	0.038	0.028	0.083
N-Nitrosodiphenylamine	mg/kg	470	0.073 U	0.072 U	0.076 U	0.071 U	0.073 U	0.07 U	0.076 U
Phenanthrene	mg/kg		0.0074	0.034	1.2	0.28	0.22	0.22	0.08
Phenol	mg/kg	250,000	0.073 U	0.072 U	0.076 U	0.024 J	0.073 U	0.07 U	0.076 U
Pyrene	mg/kg	23,000	0.015	0.05	2	1.4	1.3	1.4	0.043
PCBs	11				T			T -	
Aroclor 1242	mg/kg	0.97	N/A	0.0523 U	N/A	0.0535 U	N/A	0.0519 U	N/A
Aroclor 1248	mg/kg	0.94	N/A	0.0523 U	N/A	0.0535 U	N/A	0.0519 U	N/A
Aroclor 1254	mg/kg	0.97	N/A	0.0523 U	N/A	0.0535 U	N/A	0.117	N/A
Aroclor 1260	mg/kg	0.99	N/A	0.0523 U	N/A	0.0535 U	N/A	0.0895	N/A
Aroclor 1262	mg/kg		N/A	0.0523 U	N/A	0.0535 U	N/A	0.0519 U	N/A
Aroclor 1268	mg/kg	0.07	N/A	0.0523 U	N/A	0.0535 U	N/A	0.0519 U	N/A
PCBs (total)	mg/kg	0.97	N/A	0.0523 U	N/A	0.0535 U	N/A	0.2065	N/A
TPH/Oil and Grease	soc /1	6 200	4.5 D	251	(((152	00 1	57 O	02.0
Diesel Range Organics	mg/kg	6,200	4.5 B	251	66.6	153	98.1	57.8 9.9 H	92.9 8.8 II
		6,200	4.5 B 13.5 U N/A	251 12.9 U N/A	66.6 10.7 U N/A	9.6 U N/A	98.1 6.6 U N/A	57.8 9.9 U N/A	92.9 8.8 U N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-109-SB-1*	B1-109-SB-4*	B1-110-SB-1*	B1-110-SB-5*	B1-117-SB-1*	B1-117-SB-4.5*	B1-118-SB-1*
Volatile Organic Compounds	Cilits	TIL	B1 107 8B 1	B1 107 BB 1	BI III SB I	B1 110 SB 3	BI III SB I	B1 117 5B 1.5	B1 110 SB 1
1,1,1-Trichloroethane	mg/kg	36,000	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
1,1-Dichloroethane	mg/kg	16	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
2-Butanone (MEK)	mg/kg	190,000	0.0072 U	0.012 U	0.01 U	0.0096 U	0.0078 U	0.011 U	0.0095 U
2-Hexanone	mg/kg	1,300	0.0072 U	0.012 U	0.01 U	0.0096 U	0.0078 U	0.011 U	0.0095 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.0072 U	0.012 U	0.01 U	0.0096 U	0.0078 U	0.011 U	0.0095 U
Acetone	mg/kg	670,000	0.0072 U	0.006 J	0.01 J	0.0066 J	0.0078 U	0.018	0.0097
Benzene	mg/kg	5.1	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
Carbon tetrachloride	mg/kg	2.9	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
Cyclohexane	mg/kg	27,000	0.0072 U	0.012 U	0.01 U	0.0096 U	0.0078 U	0.011 U	0.0095 U
Ethylbenzene	mg/kg	25	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U	0.0047 U
Methyl Acetate	mg/kg	1,200,000	0.036 U	0.06 U	0.052 U	0.048 U	0.039 U	0.057 U	0.047 U
Styrene Tetrachloroethene	mg/kg	35,000	0.0036 U	0.006 U	0.0052 U	0.0048 U	0.0039 U	0.0057 U 0.0057 U	0.0047 U
	mg/kg	100	0.0036 U	0.006 U 0.006 U	0.0052 U 0.0052 U	0.0048 U 0.0048 U	0.0039 U 0.0039 U	0.0037 U	0.0047 U
Toluene Trichloroethene	mg/kg	47,000	0.0036 U 0.0036 U	0.006 U			0.0039 U 0.0039 U	0.0037 U	0.0047 U 0.0047 U
Xylenes	mg/kg	2,800	0.0036 U 0.011 U	0.006 U 0.018 U	0.0052 U 0.015 U	0.0048 U 0.014 U	0.0039 U 0.012 U	0.005 / U 0.017 U	0.0047 U 0.014 U
Semi-Volatile Organic Compoun	mg/kg	2,000	0.011 U	U.018 U	0.013 U	0.014 U	0.012 U	0.01 / 0	0.014 U
1,1-Biphenyl	mg/kg	200	0.074 U	0.017 J	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
1,2,4,5-Tetrachlorobenzene	mg/kg mg/kg	350	0.074 U 0.074 U	0.017 J 0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
2,4-Dimethylphenol	mg/kg	16,000	0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
2,4-Dinitrophenol	mg/kg	1,600	0.074 U	0.072 U	0.073 U	0.073 U	0.07 U	0.073 U	0.07 U
2-Chloronaphthalene	mg/kg	60,000	0.18 U	0.18 U	0.18 U	0.19 U	0.18 U	0.073 U	0.18 U
2-Methylnaphthalene	mg/kg	3,000	0.02	0.042	0.025 J	0.0053 J	0.027	0.014	0.0055 J
2-Methylphenol	mg/kg	41,000	0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.15 U	0.14 U	0.14 U	0.15 U	0.14 U	0.15 U	0.14 U
4-Chloroaniline	mg/kg	11	0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
Acenaphthene	mg/kg	45,000	0.011	0.095	0.032 J	0.0053 J	0.0014 J	0.001 J	0.0032 J
Acenaphthylene	mg/kg	45,000	0.049	0.086	0.12	0.01	0.0055 J	0.0063 J	0.0025 J
Acetophenone		120,000	0.074 U	0.072 U	0.085	0.075 U	0.07 U	0.024 J	0.07 U
Anthracene	mg/kg	230,000	0.089	0.43	0.36	0.0079	0.0081	0.014	0.0051 J
Benz[a]anthracene	mg/kg	21	0.24	0.95	0.86	0.026	0.026	0.035	0.011
Benzaldehyde	mg/kg	120,000	0.074 U	0.072 U	0.095	0.075 U	0.07 U	0.073 U	0.07 U
Benzo[a]pyrene	mg/kg	2.1	0.25	0.58	0.97	0.025	0.026	0.025	0.0087
Benzo[b]fluoranthene	mg/kg	21	0.56	1.7	3	0.073	0.081	0.12	0.033
Benzo[g,h,i]perylene	mg/kg		0.14	0.2	0.25	0.012	0.019	0.021	0.0056 J
Benzo[k]fluoranthene	mg/kg	210	0.58	1.7	3.1	0.075	0.082	0.13	0.033
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.019 J	0.072 U	0.51 J	0.075 U	0.015 J	0.073 U	0.031 J
Caprolactam	mg/kg	400,000	0.18 U	0.18 U	0.18 U	0.19 U	0.18 U	0.18 U	0.18 U
Carbazole	mg/kg	2.100	0.018 J	0.069 J	0.022 J	0.075 U	0.07 U	0.073 U	0.07 U
Chrysene	mg/kg	2,100	0.28	0.95	1.1	0.025	0.054	0.06	0.018
Dibenz[a,h]anthracene Di-n-butylphthalate	mg/kg	2.1 82,000	0.054 0.074 U	0.11 0.072 U	0.17 0.073 U	0.0044 J 0.075 U	0.0071 0.07 U	0.008 0.073 U	0.0017 J 0.07 U
Di-n-ocytlphthalate	mg/kg mg/kg	82,000	0.074 U 0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U 0.073 U	0.07 U
Fluoranthene	mg/kg	30,000	0.074 0	1.8	1.1	0.073 0	0.07 0	0.073 0	0.07 0
Fluorene	mg/kg	30,000	0.0077	0.094	0.027 J	0.038 0.0041 J	0.000 0.0019 J	0.0012 J	0.0025 J
Hexachloroethane	mg/kg	8	0.074 U	0.072 U	0.073 U	0.075 U	0.001) 3	0.0012 3 0.073 U	0.0023 3
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.14	0.072 0	0.29	0.012	0.015	0.022	0.0046 J
Isophorone	mg/kg	2,400	0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
Naphthalene	mg/kg	17	0.036	0.048	0.031 J	0.0094	0.028	0.013	0.0043 J
N-Nitrosodiphenylamine	mg/kg	470	0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
Phenanthrene	mg/kg		0.086	0.71	0.24	0.015	0.048	0.057	0.018
Phenol	mg/kg	250,000	0.074 U	0.072 U	0.073 U	0.075 U	0.07 U	0.073 U	0.07 U
Pyrene	mg/kg	23,000	0.33	1.7	1.7	0.035	0.06	0.09	0.032
PCBs									
Aroclor 1242	mg/kg	0.97	0.0538 U	N/A	0.052 U	N/A	0.205	N/A	0.0546 U
Aroclor 1248	mg/kg	0.94	0.0538 U	N/A	0.135	N/A	0.0542 U	N/A	0.0546 U
Aroclor 1254	mg/kg	0.97	0.0767	N/A	0.168	N/A	0.14	N/A	0.0546 U
Aroclor 1260	mg/kg	0.99	0.0622	N/A	0.052 U	N/A	0.0512 J	N/A	0.0546 U
Aroclor 1262	mg/kg		0.0538 U	N/A	0.052 U	N/A	0.0542 U	N/A	0.0546 U
Aroclor 1268	mg/kg		0.0538 U	N/A	0.052 U	N/A	0.0542 U	N/A	0.0546 U
PCBs (total)	mg/kg	0.97	0.1389	N/A	0.303	N/A	0.3962	N/A	0.0546 U
TPH/Oil and Grease									
Diesel Range Organics	mg/kg	6,200	53.5	66.9	158	181	39.1	32.9	66.5
Gasoline Range Organics	mg/kg		8.6 U	13.5 U	8.5 U	10.3 U	8.1 U	12.5 U	8.9 U
Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-118-SB-5*	B1-119-SB-1	B1-119-SB-5	B1-121-SB-1	B1-122-SB-1	B1-123-SB-1	B1-124-SB-1
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
1,1-Dichloroethane	mg/kg	16	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
2-Butanone (MEK)	mg/kg	190,000	0.0023 J	0.0099 U	0.0078 U	0.0095 U	0.012 U	0.011 U	0.01 U
2-Hexanone	mg/kg	1,300	0.0078 U	0.0099 U	0.0078 U	0.0095 U	0.012 U	0.011 U	0.01 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.0078 U	0.0099 U	0.0078 U	0.0095 U	0.012 U	0.011 U	0.01 U
Acetone	mg/kg	670,000	0.013	0.0083 B	0.026 J	0.0047 B	0.012 U	0.018 B	0.0053 B
Benzene	mg/kg	5.1	0.0014 J	0.0049 U	0.0039 U	0.0025 J	0.0016 J	0.0054 U	0.0016 J
Carbon tetrachloride	mg/kg	2.9	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
Cyclohexane	mg/kg	27,000	0.0078 U	0.0099 U	0.0078 U	0.0095 U	0.012 U	0.011 U	0.01 U
Ethylbenzene	mg/kg	25	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
Methyl Acetate	mg/kg	1,200,000	0.039 U	0.049 U	0.039 U	0.048 U	0.058 U	0.054 U	0.052 U
Styrene	mg/kg	35,000	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
Tetrachloroethene	mg/kg	100	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
Toluene	mg/kg	47,000	0.0026 J	0.0049 U	0.0013 J	0.0025 J	0.002 J	0.0054 U	0.0018 J
Trichloroethene	mg/kg	6	0.0039 U	0.0049 U	0.0039 U	0.0048 U	0.0058 U	0.0054 U	0.0052 U
Xylenes	mg/kg	2,800	0.012 U	0.0047 U	0.0037 U	0.014 U	0.0038 U	0.0054 U	0.0032 U
Semi-Volatile Organic Compoun		2,000	0.012 0	0.013 0	0.012 0	0.017 0	0.0170	0.010 0	0.010 0
<u> </u>		200	Λ 17	0.073 U	Λ12	0.20	Ω ζ1	0.71 T	Λ (1
1,1-Biphenyl	mg/kg		0.17		0.13 0.07 U	0.28	0.61 0.075 U	0.71 J	0.61
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.072 U	0.073 U		0.074 U		0.076 U	0.076 U
2,4-Dimethylphenol	mg/kg	16,000	0.072 U	0.073 R	0.07 R	0.074 U	0.075 U	0.02 J	0.076 U
2,4-Dinitrophenol	mg/kg	1,600	0.18 U	0.18 R	0.18 R	0.19 UJ	0.19 UJ	0.19 UJ	0.19 UJ
2-Chloronaphthalene	mg/kg	60,000	0.072 U	0.073 U	0.07 U	0.074 U	0.075 U	0.076 U	0.076 U
2-Methylnaphthalene	mg/kg	3,000	0.54	0.0066 J	0.21	0.34	0.26 J	0.44	0.38
2-Methylphenol	mg/kg	41,000	0.072 U	0.073 R	0.07 R	0.074 U	0.075 U	0.02 J	0.076 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.14 U	0.15 R	0.14 R	0.15 U	0.15 U	0.045 J	0.15 U
4-Chloroaniline	mg/kg	11	0.072 U	0.073 U	0.07 U	0.074 U	0.075 U	0.076 U	0.076 U
Acenaphthene	mg/kg	45,000	0.035	0.0067 J	0.0089	0.14	0.14 J	0.16	0.13
Acenaphthylene	mg/kg	45,000	0.26	0.0069 B	0.016	0.25	0.29 J	0.75	0.41
Acetophenone	mg/kg		0.12	0.073 U	0.028 J	0.071 J	0.085	0.081 J	0.065 J
Anthracene	mg/kg	230,000	0.6	0.2	0.075	0.61	0.61 J	1.5	0.74
Benz[a]anthracene	mg/kg	21	1.8	0.34	0.2	1.6	2.5	4	2.3
Benzaldehyde	mg/kg	120,000	0.18	0.073 R	0.018 J	0.034 J	0.033 J	0.053 J	0.042 J
Benzo[a]pyrene	mg/kg	2.1	1.6	0.14	0.28	1.7 J	2.6	3.9	2.5 J
Benzo[b]fluoranthene	mg/kg	21	4.3	0.45	0.82	3.6 J	5.3	6.9	5.3 J
Benzo[g,h,i]perylene	mg/kg		0.69	0.074	0.1	0.7	0.92	2	1.1 J
Dames [1,1fly = 41	/1	210	4.4	0.46	0.79	3.6 J	5.5	7	5.3 J
Benzo[k]fluoranthene	mg/kg								
bis(2-Ethylhexyl)phthalate	mg/kg mg/kg	160	0.072	0.073 U	0.07 U	0.074 UJ	0.19 J	0.24 J	0.067 B
bis(2-Ethylhexyl)phthalate Caprolactam									
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.072	0.073 U	0.07 U	0.074 UJ	0.19 J	0.24 J	0.067 B
bis(2-Ethylhexyl)phthalate Caprolactam	mg/kg mg/kg	160	0.072 0.18 U	0.073 U 0.18 U	0.07 U 0.18 U	0.074 UJ 0.19 U	0.19 J 0.19 U	0.24 J 0.19 U	0.067 B 0.19 U
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole	mg/kg mg/kg mg/kg	160 400,000	0.072 0.18 U 0.14	0.073 U 0.18 U 0.034 J	0.07 U 0.18 U 0.049 J	0.074 UJ 0.19 U 0.16	0.19 J 0.19 U 0.29	0.24 J 0.19 U 0.63 J	0.067 B 0.19 U 0.22
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene	mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100	0.072 0.18 U 0.14 2.1	0.073 U 0.18 U 0.034 J 0.39	0.07 U 0.18 U 0.049 J 0.4	0.074 UJ 0.19 U 0.16 1.7	0.19 J 0.19 U 0.29 2.6	0.24 J 0.19 U 0.63 J 4.1	0.067 B 0.19 U 0.22 2.4
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene	mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1	0.072 0.18 U 0.14 2.1 0.25	0.073 U 0.18 U 0.034 J 0.39 0.025	0.07 U 0.18 U 0.049 J 0.4 0.041	0.074 UJ 0.19 U 0.16 1.7 0.27	0.19 J 0.19 U 0.29 2.6 0.34	0.24 J 0.19 U 0.63 J 4.1 0.69	0.067 B 0.19 U 0.22 2.4 0.6 J
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1 82,000 8,200	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99 0.0064 J	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3 0.15	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 30,000	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99 0.0064 J	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3 0.15	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99 0.0064 J 0.073 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3 0.15 0.074 U	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99 0.0064 J 0.073 U 0.074	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3 0.15 0.074 U 0.69	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 30,000 8 21 2,400	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99 0.0064 J 0.073 U 0.074	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U 1.9 0.076 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.99 0.0064 J 0.073 U 0.074 0.073 U 0.073 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U 1.9 0.076 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.67	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.073 U 0.073 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.93	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U 1.9 0.076 U 1.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.013 0.073 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U 0.74	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.013 0.073 U 1 0.073 R	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U 0.74 0.07 R	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4 0.045 J
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.013 0.073 U 1 0.073 R 1.2	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4 0.045 J 4.6
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.073 U 1 0.073 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 U 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4 0.045 J 4.6
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.073 U 0.073 U 1 0.073 U 1 0.073 R 1.2	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4 0.045 J 4.6
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1254	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.073 U 0.073 U 1 0.073 U 1 0.073 U 0.013 0.073 U 1 0.073 U 0.073 U 0.013	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.089 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.59 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4 0.045 J 4.6
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.073 U 1 0.073 U 1 0.073 U 0.013 0.073 U 0.013 0.073 U 1 0.073 U 0.013	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.108 J 0.0574 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.363 J 0.0582 U
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.072 U 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A N/A N/A	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.073 U 1 0.073 R 1.2 0.0603 U 0.0603 U 0.0918 0.0603 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A N/A	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6 0.19 0.0571 U 0.378 J 0.0571 U 0.411 J	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.108 J 0.0574 U 0.163	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.544
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.021 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A N/A N/A N/A	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.073 U 0.073 U 0.074 0.073 U 0.073 U 0.073 U 0.073 U 0.013 0.073 U 1 0.073 R 1.2 0.0603 U 0.0603 U 0.122 0.0918 0.0603 U 0.0603 U 0.0603 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A N/A N/A N/A N/A	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5 0.0556 U 0.158 J 0.0556 U 0.177 0.0556 U	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6 0.19 0.0571 U 0.378 J 0.0571 U 0.411 J 0.0571 U	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.163 0.0574 U	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 1.5 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.363 J 0.0582 U 0.544 0.0582 U
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total)	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.072 U 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A N/A N/A	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.074 0.073 U 0.073 U 1 0.073 R 1.2 0.0603 U 0.0603 U 0.0918 0.0603 U	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A N/A	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6 0.19 0.0571 U 0.378 J 0.0571 U 0.411 J	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.108 J 0.0574 U 0.163	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.544
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.073 U 0.073 U 1 0.073 U 0.073 U 0.013 0.073 U 1 0.073 U 0.013 0.073 U 0.013 0.073 U 0.013 0.073 U 0.013	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5 0.0756 U 0.158 J 0.0556 U 0.177 0.0556 U 0.4058	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6 0.19 0.0571 U 0.378 J 0.0571 U 0.411 J 0.0571 U 0.979	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.163 0.0574 U 0.163 0.0574 U 0.386	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.363 J 0.0582 U 1.038
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.073 U 0.073 U 0.074 0.073 U 0.073 U 0.073 U 1 0.073 R 1.2 0.0603 U 0.0603 U 0.122 0.0918 0.0603 U 0.122 0.0603 U 0.12138	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5 0.0756 U 0.158 J 0.0556 U 0.177 0.0556 U 0.4058	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6 0.19 0.0571 U 0.378 J 0.0571 U 0.411 J 0.0571 U 0.979	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.163 0.0574 U 0.163 0.0574 U 0.386	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1.5 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.363 J 0.0582 U 1.038
bis(2-Ethylhexyl)phthalate Caprolactam Carbazole Chrysene Dibenz[a,h]anthracene Di-n-butylphthalate Di-n-ocytlphthalate Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg	160 400,000 2,100 2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.072 0.18 U 0.14 2.1 0.25 0.072 U 0.072 U 4.1 0.072 U 0.73 0.072 U 0.67 0.096 1.9 0.13 3.7 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.073 U 0.18 U 0.034 J 0.39 0.025 0.073 U 0.073 U 0.099 0.0064 J 0.073 U 0.073 U 0.073 U 1 0.073 U 0.073 U 0.013 0.073 U 1 0.073 U 0.013 0.073 U 0.013 0.073 U 0.013 0.073 U 0.013	0.07 U 0.18 U 0.049 J 0.4 0.041 0.07 U 0.07 U 0.9 0.0067 J 0.07 U 0.3 0.07 U 0.74 0.07 R 0.51 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.074 UJ 0.19 U 0.16 1.7 0.27 0.074 UJ 3.3 0.15 0.074 U 0.69 0.074 U 0.96 0.074 U 2.2 0.018 J 3.5 0.0756 U 0.158 J 0.0556 U 0.177 0.0556 U 0.4058	0.19 J 0.19 U 0.29 2.6 0.34 0.075 U 0.075 UJ 5.1 0.13 J 0.075 U 0.93 0.075 U 0.91 0.075 U 3.1 0.036 J 5.6 0.19 0.0571 U 0.378 J 0.0571 U 0.411 J 0.0571 U 0.979	0.24 J 0.19 U 0.63 J 4.1 0.69 0.076 U 0.076 UJ 8.9 0.076 U 1.9 0.076 U 1.3 0.076 U 5.5 0.04 J 9.9 0.115 J 0.0574 U 0.163 0.0574 U 0.163 0.0574 U 0.386	0.067 B 0.19 U 0.22 2.4 0.6 J 0.076 U 0.076 U 4.4 0.13 0.076 U 1 J 0.076 U 2.4 0.045 J 4.6 0.131 0.0582 U 0.544 0.0582 U 1.038

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

 $^{^{\}wedge}$ PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-125-SB-1	B1-135-SB-1*	B1-135-SB-5*	B1-136-SB-1	B1-136-SB-5	B1-137-SB-1*	B1-137-SB-5*
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
1,1-Dichloroethane	mg/kg	16	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0011 J	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
2-Butanone (MEK)	mg/kg	190,000	0.0026 J	0.0097 U	0.0094 U	0.012 U	0.015 U	0.011 U	0.023 U
2-Hexanone	mg/kg	1,300	0.01 U	0.0097 U	0.0094 U	0.012 U	0.015 U	0.011 U	0.023 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.01 U	0.0097 U	0.0094 U	0.012 U	0.015 U	0.011 U	0.023 U
Acetone	mg/kg	670,000	0.04 B	0.01	0.0084 J	0.006 B	0.01 B	0.013	0.023 U
Benzene	mg/kg	5.1	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
Carbon tetrachloride	mg/kg	2.9	0.0051 U 0.01 U	0.0048 U 0.0097 U	0.0047 U	0.0058 U 0.012 U	0.0073 U	0.0053 U	0.012 U
Cyclohexane Ethylbenzene	mg/kg mg/kg	27,000	0.01 U 0.0051 U	0.0097 U 0.0048 U	0.0094 U 0.0047 U	0.012 U 0.0058 U	0.015 U 0.0073 U	0.011 U 0.0053 U	0.023 U 0.012 U
Methyl Acetate	mg/kg	1,200,000	0.0031 U	0.048 U	0.0047 U	0.058 U	0.0073 U	0.0033 U	0.012 U
Styrene	mg/kg	35,000	0.0051 U	0.048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.12 U
Tetrachloroethene	mg/kg	100	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
Toluene	mg/kg	47,000	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
Trichloroethene	mg/kg	6	0.0051 U	0.0048 U	0.0047 U	0.0058 U	0.0073 U	0.0053 U	0.012 U
Xylenes	mg/kg	2,800	0.015 U	0.015 U	0.014 U	0.017 U	0.022 U	0.016 U	0.035 U
Semi-Volatile Organic Compound									
1,1-Biphenyl	mg/kg	200	0.17 J	0.075 U	0.072 U	0.084	0.077 U	0.072 U	0.079 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.075 U	0.075 U	0.072 U	0.076 U	0.077 U	0.072 U	0.079 U
2,4-Dimethylphenol	mg/kg	16,000	0.075 U	0.075 U	0.072 U	0.076 U	0.077 U	0.072 U	0.079 U
2,4-Dinitrophenol	mg/kg	1,600	0.19 UJ	0.19 U	0.18 U	0.19 U	0.19 UJ	0.18 U	0.2 U
2-Chloronaphthalene	mg/kg	60,000	0.075 U	0.075 U	0.072 U	0.051 J	0.077 U	0.072 U	0.079 U
2-Methylnaphthalene	mg/kg	3,000	0.13	0.0017 J	0.011	0.46	0.0077 U	0.043	0.01
2-Methylphenol	mg/kg	41,000	0.075 U	0.075 U	0.072 U	0.076 U	0.077 U	0.072 U	0.079 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.14 J	0.15 U	0.14 U	0.021 J	0.15 U	0.14 U	0.16 U
4-Chloroaniline	mg/kg	11	0.22 J	0.075 U	0.072 U	0.076 U	0.077 U	0.072 U	0.079 U
Acenaphthene	mg/kg	45,000	0.059	0.0016 B	0.003 B	0.025	0.0077 U	0.0076 B	0.0078 U
Acenaphthylene	mg/kg	45,000	0.12	0.0074 U	0.0063 J	0.35	0.0016 J	0.069	0.0081
Acetophenone		120,000	0.044 J	0.075 U	0.072 U	0.096	0.077 U	0.072 U	0.079 U
Anthracene	mg/kg	230,000	0.28	0.0052 B	0.018 B	0.3	0.0028 B	0.075	0.0067 B
Benz[a]anthracene	mg/kg	21	0.7	0.0051 J	0.077	0.65	0.0061 B	0.45	0.034
Benzaldehyde Benzo[a]pyrene	mg/kg mg/kg	120,000	0.019 J 0.88 J	0.075 U 0.0021 J	0.072 U 0.11	0.1 J 0.84	0.077 R 0.0057 B	0.072 U 0.52	0.079 U 0.04
Benzo[b]fluoranthene	mg/kg	2.1	2.2	0.0021 J 0.0072 J	0.11	1.8	0.0037 B	1.2	0.04
Benzo[g,h,i]perylene	mg/kg	21	0.32 J	0.0072 J	0.061	0.49	0.012 0.0025 J	0.15	0.02
Benzo[k]fluoranthene	mg/kg	210	2.3	0.0074 J	0.26	1.9	0.012	1.2	0.087
bis(2-Ethylhexyl)phthalate	mg/kg	160	1.6 J	0.075 U	0.072 U	0.017 B	0.077 U	0.072 U	0.079 U
Caprolactam	mg/kg	400,000	0.19 U	0.19 U	0.18 U	0.19 U	0.19 U	0.18 U	0.2 U
Carbazole	mg/kg	,							-
Chrysene	1115/115	'	0.085 J	0.075 U	0.072 U	0.11	0.077 U	0.039 J	0.079 U
Dibenz[a,h]anthracene	mg/kg	2,100	0.085 J 0.77	0.075 U 0.0041 J	0.072 U 0.099	0.11 0.87	0.077 U 0.0056 B	0.039 J 0.48	0.079 U 0.034
Di-n-butylphthalate		2,100							
Din ooutlahtholota	mg/kg		0.77	0.0041 J	0.099	0.87	0.0056 B	0.48	0.034
Di-n-ocytlphthalate	mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200	0.77 0.11 J 0.075 U 0.11 J	0.0041 J 0.0074 U 0.075 U 0.075 U	0.099 0.022 0.072 U 0.072 U	0.87 0.18	0.0056 B 0.0077 U 0.077 U 0.077 U	0.48 0.075 0.072 U 0.072 U	0.034 0.0068 J 0.079 U 0.079 U
Fluoranthene	mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000	0.77 0.11 J 0.075 U 0.11 J 1.2	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B	0.099 0.022 0.072 U 0.072 U 0.12	0.87 0.18 0.076 U 0.076 UJ	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B	0.48 0.075 0.072 U 0.072 U 0.63	0.034 0.0068 J 0.079 U 0.079 U 0.043
Fluoranthene Fluorene	mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000 30,000	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B	0.87 0.18 0.076 U 0.076 UJ 1 0.044	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B
Fluoranthene Fluorene Hexachloroethane	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000 30,000 8	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000 30,000 8 21	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.00096 J	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.077 U	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.00096 J 0.075 U	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0025 J 0.077 U	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400 17	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0025 J 0.077 U 0.0025 J	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.088 B
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0025 J 0.077 U 0.0025 J 0.077 U	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene	mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.00096 J 0.0023 B 0.075 U 0.0023 B 0.075 U	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.37	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.0077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.043	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol	mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.94	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.00096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.0075 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene	mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.00096 J 0.0023 B 0.075 U 0.0023 B 0.075 U	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.37	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.0077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.043	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.012 B	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.048 B	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0075 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.63	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.017 B
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.00096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.012 B	0.099 0.022 0.072 U 0.072 U 0.12 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.048 B	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0034 B 0.077 U 0.0061 B	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 0.16	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.017 B
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B	0.48 0.075 0.072 U 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 0.18	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12 N/A N/A N/A	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.0077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B N/A N/A	0.48 0.075 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 3.74	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J 0.0577 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B	0.48 0.075 0.072 U 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 0.18	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12 N/A N/A N/A N/A	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.0077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B N/A N/A N/A N/A	0.48 0.075 0.072 U 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 0.18 0.108 U 0.108 U 0.108 U 0.108 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J 0.0577 U 0.433	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B 0.056 U 0.056 U 0.056 U 0.056 U	0.099 0.022 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12 N/A N/A N/A N/A N/A N/A	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U 0.0571 U 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B N/A N/A N/A N/A N/A N/A	0.48 0.075 0.072 U 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 0.18 0.108 U 0.108 U 0.108 U 0.108 U 0.108 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1262 Aroclor 1268	mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J 0.0577 U 0.433 0.0577 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B 0.056 U 0.056 U 0.056 U 0.056 U 0.056 U	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12 N/A N/A N/A N/A N/A N/A N/A	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U 0.0571 U 0.0571 U 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B N/A N/A N/A N/A N/A N/A	0.48 0.075 0.072 U 0.072 U 0.072 U 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.108 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total)	mg/kg	2.1 82,000 8,200 30,000 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J 0.0577 U 0.433 0.0577 U	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B 0.056 U 0.056 U 0.056 U 0.056 U 0.056 U	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12 N/A N/A N/A N/A N/A N/A N/A	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U 0.0571 U 0.0571 U 0.0571 U 0.0571 U 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.077 U 0.0025 J 0.077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B N/A N/A N/A N/A N/A N/A	0.48 0.075 0.072 U 0.072 U 0.072 U 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.108 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.079 U 0.079 U 0.0088 B 0.079 U 0.017 B 0.079 U 0.037
Fluoranthene Fluorene Hexachloroethane Indeno[1,2,3-c,d]pyrene Isophorone Naphthalene N-Nitrosodiphenylamine Phenanthrene Phenol Pyrene PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg	2.1 82,000 8,200 30,000 8 21 2,400 17 470 250,000 23,000 0.97 0.94 0.97 0.99	0.77 0.11 J 0.075 U 0.11 J 1.2 0.087 0.075 U 0.31 J 0.075 U 0.33 0.075 U 0.94 0.24 J 1.4 0.136 J 0.0577 U 0.307 J 0.0577 U 0.433 0.0577 U 0.876	0.0041 J 0.0074 U 0.075 U 0.075 U 0.01 B 0.0028 B 0.075 U 0.0096 J 0.075 U 0.0023 B 0.075 U 0.012 B 0.075 U 0.01 B 0.056 U 0.056 U 0.056 U 0.056 U 0.056 U 0.056 U	0.099 0.022 0.072 U 0.072 U 0.072 U 0.0021 B 0.072 U 0.054 0.072 U 0.015 B 0.072 U 0.048 B 0.072 U 0.12 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/	0.87 0.18 0.076 U 0.076 UJ 1 0.044 0.076 U 0.47 0.076 U 0.37 0.076 U 0.62 0.027 J 1 0.0571 U	0.0056 B 0.0077 U 0.077 U 0.077 U 0.0073 B 0.0077 U 0.0077 U 0.0025 J 0.077 U 0.0034 B 0.077 U 0.0061 B N/A N/A N/A N/A N/A N/A N/A N/A N/A	0.48 0.075 0.072 U 0.072 U 0.072 U 0.63 0.0049 B 0.072 U 0.18 0.072 U 0.043 0.072 U 0.16 0.072 U 0.16 0.072 U 0.18 0.108 U	0.034 0.0068 J 0.079 U 0.079 U 0.043 0.0013 B 0.079 U 0.021 0.0088 B 0.079 U 0.017 B 0.079 U 0.037 N/A N/A N/A N/A N/A N/A N/A N/A N/A N/

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-144-SB-1	B1-144-SB-5	B1-145-SB-1*	B1-145-SB-8.5*	B1-148-SB-1*	B1-156-SB-1*	B1-156-SB-7*
Volatile Organic Compounds	Cints	1712	21 111 22 1	BT TT. BB C	B1 1.0 3B 1	21 1 10 22 010	B1 1.0 BB 1	B1 100 BB 1	21 100 22 7
1,1,1-Trichloroethane	mg/kg	36,000	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
1,1-Dichloroethane	mg/kg	16	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
2-Butanone (MEK) 2-Hexanone	mg/kg	190,000	0.01 U 0.01 U	0.01 U 0.01 U	0.0035 J 0.01 U	0.0059 J 0.0092 U	0.0098 U 0.0098 U	0.013 U 0.013 U	0.0051 J 0.0096 U
4-Methyl-2-pentanone (MIBK)	mg/kg mg/kg	56,000	0.01 U	0.01 U	0.01 U	0.0092 U	0.0098 U	0.013 U	0.0096 U
Acetone (MIDK)	mg/kg	670,000	0.01 UJ	0.0053 B	0.022	0.043	0.0073 J	0.013	0.012
Benzene	mg/kg	5.1	0.0021 J	0.0046 J	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
Carbon tetrachloride	mg/kg	2.9	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
Cyclohexane	mg/kg	27,000	0.01 U	0.01 U	0.01 U	0.0092 U	0.0098 U	0.013 U	0.0096 U
Ethylbenzene	mg/kg	25	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0023 J
Methyl Acetate	mg/kg		0.052 U	0.051 U	0.05 U	0.046 U	0.049 U	0.065 U	0.048 U
Styrene	mg/kg	35,000	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
Tetrachloroethene	mg/kg	100	0.0052 U	0.0051 U	0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0048 U
Toluene Trichloroethene	mg/kg	47,000	0.0052 U	0.0051 U	0.005 U 0.005 U	0.0046 U	0.0049 U	0.0065 U	0.0043 J
	mg/kg	6	0.0052 U	0.0051 U		0.0046 U	0.0049 U	0.0065 U	0.0048 U
Xylenes Semi-Volatile Organic Compoun	mg/kg	2,800	0.015 U	0.015 U	0.015 U	0.014 U	0.015 U	0.019 U	0.014 U
1,1-Biphenyl	mg/kg	200	0.027 J	0.03 J	0.03 J	0.075 U	0.073 U	0.074 U	0.079 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.027 J 0.075 U	0.03 J 0.075 U	0.03 J 0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
2,4-Dimethylphenol	mg/kg	16,000	0.075 U	0.075 U	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
2,4-Dinitrophenol	mg/kg	1,600	0.19 U	0.19 U	0.2 U	0.19 U	0.18 U	0.19 U	0.2 U
2-Chloronaphthalene	mg/kg	60,000	0.075 U	0.075 U	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
2-Methylnaphthalene	mg/kg	3,000	0.12	0.089	0.052	0.012	0.0017 J	0.048 J	0.065 J
2-Methylphenol	mg/kg	41,000	0.075 U	0.075 U	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.15 U	0.15 U	0.16 U	0.15 U	0.15 U	0.15 U	0.16 U
4-Chloroaniline	mg/kg	11	0.075 U	0.075 U	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
Acenaphthene	mg/kg	45,000	0.013	0.0072 J	0.015	0.0046 J	0.0075 U	0.0069 B	0.03 B
Acenaphthylene Acetophenone	mg/kg mg/kg	45,000 120,000	0.13 0.028 J	0.12 0.055 J	0.015 0.079 U	0.0084 0.075 U	0.0075 U 0.073 U	0.092 0.074 U	0.34 0.079 U
Anthracene	mg/kg	230,000	0.028 3	0.033 3	0.079 0	0.073 0	0.075 U	0.074 0	0.079 0
Benz[a]anthracene	mg/kg	21	0.17	0.15	0.14	0.048	0.0073 C	0.25	1
Benzaldehyde	mg/kg	120,000	0.023 J	0.032 J	0.02 J	0.075 U	0.073 U	0.017 J	0.079 U
Benzo[a]pyrene	mg/kg	2.1	0.59 J	0.47	0.24	0.038	0.0028 B	0.31	1.2
Benzo[b]fluoranthene	mg/kg	21	2.2 J	1.2	0.47	0.15	0.0076	0.66	2
Benzo[g,h,i]perylene	mg/kg		0.24 J	0.35	0.058	0.045	0.0027 J	0.27	0.57
Benzo[k]fluoranthene	mg/kg	210	2.1 J	1.2	0.48	0.16	0.0076	0.68	2
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.075 UJ	0.075 UJ	0.66	0.021 J	0.073 U	0.27	0.079 U
Caprolactam	mg/kg	400,000	0.19 U	0.19 U	0.2 U	0.19 U	0.18 U	0.19 U	0.2 U
Carbazole Chrysene	mg/kg mg/kg	2,100	0.047 J 0.53	0.065 J 0.58	0.023 J 0.26	0.075 U 0.089	0.073 U 0.0022 J	0.019 J 0.3	0.07 J
Dibenz[a,h]anthracene	mg/kg	2,100	0.33 0.11 J	0.36	0.20	0.015	0.0022 J 0.0075 U	0.076	0.22
Di-n-butylphthalate	mg/kg	82,000	0.075 U	0.075 U	0.079 U	0.075 U	0.0073 U	0.074 U	0.079 U
Di-n-ocytlphthalate	mg/kg	8,200	0.075 UJ	0.075 UJ	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
Fluoranthene	mg/kg	30,000	0.82	0.78	0.29	0.1	0.0053 B	0.51	2.1
Fluorene	mg/kg	30,000	0.016	0.014	0.015	0.0063 J	0.0075 U	0.025 B	0.058 B
Hexachloroethane	mg/kg	8	0.075 U	0.075 U	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.24 J	0.36	0.053	0.041	0.0021 J	0.24	0.56
Isophorone Northfologo	mg/kg	2,400	0.075 U	0.075 U	0.079 U	0.075 U	0.073 U	0.074 U	0.079 U
Naphthalene N-Nitrosodiphenylamine	mg/kg	17 470	0.11 0.075 U	0.093 0.075 U	0.067 0.019 J	0.015 0.075 U	0.0016 J 0.073 U	0.07 B 0.074 U	0.11 B 0.079 U
N-Nitrosogipnenylamine Phenanthrene	mg/kg mg/kg	4/0	0.075 U	0.075 U	0.019 J	0.075 0	0.073 U 0.0046 J	0.074 U 0.25 B	0.079 0
Phenol	mg/kg	250,000	0.26 0.075 U	0.075 U	0.19 0.079 U	0.057 0.075 U	0.0046 J 0.073 U	0.23 B 0.074 U	0.079 U
Pyrene	mg/kg	23,000	0.79	0.66	0.33	0.086	0.0036 J	0.51	2.6
PCBs	. 88	.,							
Aroclor 1242	mg/kg	0.97	0.0564 U	N/A	0.0697 U	N/A	0.0539 U	0.0529 U	N/A
		0.94	0.0564 U	N/A	0.0697 U	N/A	0.0539 U	0.0529 U	N/A
Aroclor 1248	mg/kg					>T/A	0.0700.77	1	3.7/4
Aroclor 1254	mg/kg mg/kg	0.97	0.0564 U	N/A	0.403	N/A	0.0539 U	0.0529 U	N/A
Aroclor 1254 Aroclor 1260	mg/kg mg/kg		0.162	N/A	0.705	N/A	0.0539 U	0.0529 U	N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262	mg/kg mg/kg mg/kg	0.97	0.162 0.0564 U	N/A N/A	0.705 0.0697 U	N/A N/A	0.0539 U 0.0539 U	0.0529 U 1.72	N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268	mg/kg mg/kg mg/kg mg/kg	0.97 0.99	0.162 0.0564 U 0.0564 U	N/A N/A N/A	0.705 0.0697 U 0.0697 U	N/A N/A N/A	0.0539 U 0.0539 U 0.0539 U	0.0529 U 1.72 1	N/A N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total)	mg/kg mg/kg mg/kg	0.97	0.162 0.0564 U	N/A N/A	0.705 0.0697 U	N/A N/A	0.0539 U 0.0539 U	0.0529 U 1.72	N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg	0.97 0.99 0.97	0.162 0.0564 U 0.0564 U 0.162	N/A N/A N/A N/A	0.705 0.0697 U 0.0697 U 1.108	N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0539 U 0.0539 U	0.0529 U 1.72 1 2.72	N/A N/A N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg mg/kg mg/kg mg/kg mg/kg	0.97 0.99 0.97	0.162 0.0564 U 0.0564 U 0.162 89.7	N/A N/A N/A N/A 54.4	0.705 0.0697 U 0.0697 U 1.108	N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0539 U 0.0539 U	0.0529 U 1.72 1 2.72	N/A N/A N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg	0.97 0.99 0.97 6,200 6,200	0.162 0.0564 U 0.0564 U 0.162	N/A N/A N/A N/A	0.705 0.0697 U 0.0697 U 1.108	N/A N/A N/A N/A	0.0539 U 0.0539 U 0.0539 U 0.0539 U	0.0529 U 1.72 1 2.72	N/A N/A N/A N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-158-SB-1*	B1-158-SB-4.5*	B1-175-SB-1*	B1-175-SB-7.5*	B1-176-SB-1*	B1-176-SB-4*
Volatile Organic Compounds								
1,1,1-Trichloroethane	mg/kg	36,000	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
1,1-Dichloroethane	mg/kg	16	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
2-Butanone (MEK)	mg/kg	190,000	0.011 U	0.0093 U	0.013 U	0.013 U	0.01 U	0.012 U
2-Hexanone	mg/kg	1,300	0.011 U	0.0093 U	0.013 U	0.013 U	0.01 U	0.012 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.011 U	0.0093 U	0.013 U	0.013 U	0.01 U	0.012 U
Acetone	mg/kg	670,000 5.1	0.011 U	0.0052 J	0.013 U	0.02	0.0059 J	0.0064 J
Benzene Carbon tetrachloride	mg/kg	2.9	0.0056 U 0.0056 U	0.0047 U 0.0047 U	0.0064 U 0.0064 U	0.0063 U 0.0063 U	0.0051 U 0.0051 U	0.0062 U 0.0062 U
Cyclohexane	mg/kg mg/kg	27,000	0.0036 U 0.011 U	0.0047 U	0.0064 U 0.013 U	0.0063 U	0.0031 U	0.0062 U 0.012 U
Ethylbenzene	mg/kg	25	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
Methyl Acetate	mg/kg	1,200,000	0.056 U	0.047 U	0.064 U	0.063 U	0.0031 U	0.062 U
Styrene	mg/kg	35,000	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
Tetrachloroethene	mg/kg	100	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
Toluene	mg/kg	47,000	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.002 J
Trichloroethene	mg/kg	6	0.0056 U	0.0047 U	0.0064 U	0.0063 U	0.0051 U	0.0062 U
Xylenes	mg/kg	2,800	0.017 U	0.014 U	0.019 U	0.019 U	0.015 U	0.018 U
Semi-Volatile Organic Compoun	ds^							
1,1-Biphenyl	mg/kg	200	0.076 U	0.073 U	0.026 J	0.017 J	0.018 J	0.13
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.075 U
2,4-Dimethylphenol	mg/kg	16,000	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.037 J
2,4-Dinitrophenol	mg/kg	1,600	0.19 U	0.18 U	0.19 U	0.2 U	0.18 U	0.19 U
2-Chloronaphthalene	mg/kg	60,000	0.076 U	0.073 U	0.079	0.079 U	0.072 U	0.075 U
2-Methylnaphthalene	mg/kg	3,000	0.0077 U	0.0073 U	0.046	0.093	0.058	0.39
2-Methylphenol	mg/kg	41,000	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.027 J
3&4-Methylphenol(m&p Cresol) 4-Chloroaniline	mg/kg	41,000	0.15 U 0.076 U	0.15 U 0.073 U	0.15 U 0.074 U	0.16 U 0.079 U	0.14 U 0.072 U	0.055 J 0.075 U
Acenaphthene	mg/kg mg/kg	45,000	0.076 U	0.0013 B	0.074 0	0.079 0	0.072 0	1
Acenaphthylene	mg/kg	45,000	0.0077 U	0.0013 B 0.0073 U	0.035	0.03	0.035	0.62
Acetophenone		120,000	0.076 U	0.073 U	0.074 U	0.02 J	0.072 U	0.062 J
Anthracene	mg/kg	230,000	0.0056 B	0.0056 B	0.13	0.16	0.6	4.3
Benz[a]anthracene	mg/kg	21	0.11	0.0036 J	0.41	0.31	1.7	10.6
Benzaldehyde	mg/kg	120,000	0.076 U	0.073 U	0.066 J	0.029 J	0.072 U	0.13
Benzo[a]pyrene	mg/kg	2.1	0.079	0.0026 J	0.42	0.37	1.5	8.4
Benzo[b]fluoranthene	mg/kg	21	0.21	0.011	0.83	1.2	2.6	15.5
Benzo[g,h,i]perylene	mg/kg		0.035	0.0028 J	0.14	0.16	0.44	4.3
Benzo[k]fluoranthene	mg/kg	210	0.22	0.011	0.85	0.95	2.7	16
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.076 U	0.073 U	0.074 U	0.061 J	0.072 U	0.075 U
Caprolactam	mg/kg	400,000	0.19 U	0.18 U	0.19 U	0.2 U	0.18 U	0.19 U
Carbazole	mg/kg	2 100	0.076 U	0.073 U	0.025 J	0.084	0.25	2.6
Chrysene	mg/kg	2,100	0.12	0.0061 J 0.0073 U	0.42	0.33	1.7	10.4
Dibenz[a,h]anthracene Di-n-butylphthalate	mg/kg mg/kg	2.1 82,000	0.015 0.076 U	0.0073 U	0.063 0.074 U	0.074 0.079 U	0.22 0.072 U	0.075 U
Di-n-ocytlphthalate	mg/kg	8,200	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.075 U
Fluoranthene	mg/kg	30,000	0.070 0	0.073 C	0.074 0	0.079 0	3.6	22.3
Fluorene	mg/kg	30,000	0.0077 U	0.0035 B	0.031	0.074	0.15	1.2
Hexachloroethane	mg/kg	8	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.075 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.036	0.0022 J	0.15	0.16	0.52	4.5
Isophorone	mg/kg	2,400	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.075 U
Naphthalene	mg/kg	17	0.0013 B	0.0019 B	0.048	0.18	0.074	0.37
N-Nitrosodiphenylamine	mg/kg	470	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.075 U
Phenanthrene	mg/kg		0.014 B	0.016 B	0.58	0.75	2.2	15.5
Phenol	mg/kg	250,000	0.076 U	0.073 U	0.074 U	0.079 U	0.072 U	0.037 J
Pyrene	mg/kg	23,000	0.15	0.0089 B	0.88	0.55	3.1	17.7
PCBs	<u> </u>	_		1:	1	I	1 0	T ==:
Aroclor 1242	mg/kg	0.97	0.058 U	N/A	0.0592 U	N/A	0.0543 U	N/A
Aroclor 1248	mg/kg	0.94	0.058 U	N/A	0.0592 U	N/A	0.0543 U	N/A
Aroclor 1254	mg/kg	0.97	0.058 U	N/A	0.0592 U	N/A	0.0543 U	N/A
Aroclor 1260	mg/kg	0.99	0.058 U	N/A	0.0592 U	N/A	0.0543 U	N/A
Aroclor 1262	mg/kg		0.058 U	N/A	0.0592 U	N/A	0.0543 U	N/A
Aroclor 1268	mg/kg	0.97	0.058 U 0.058 U	N/A N/A	0.0592 U 0.0592 U	N/A N/A	0.119	N/A N/A
PCBs (total) TPH/Oil and Grease	mg/kg	0.97	0.038 U	IN/A	0.0392 U	IN/A	0.119	IN/A
Diesel Range Organics	mg/kg	6,200	8	6.6 J	49.4	72.3	108	538
	mg/Kg	0,∠00	0	U.O J	47.4	12.3	109	330
9 9		6.200	1 <u>4</u> 1 T	9 I I	14 11	15011	13 8 11	14 6 11
Gasoline Range Organics Oil and Grease		6,200 6,200	14.1 U N/A	9 U N/A	14 U N/A	15.9 U N/A	13.8 U N/A	14.6 U N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B1-177-SB-1*	B1-177-SB-5*	B2-001-SB-1	B2-001-SB-5	B2-002-SB-1	B2-002-SB-4.5	B2-006-SB-1
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
1,1-Dichloroethane	mg/kg	16	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
1,2,3-Trichlorobenzene	mg/kg	930	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
1,2,4-Trichlorobenzene	mg/kg	110	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
1,2-Dichlorobenzene	mg/kg	9,300	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
2-Butanone (MEK)	mg/kg	190,000	0.0054 J	0.017 U	N/A	0.0086 U	N/A	N/A	N/A
2-Hexanone	mg/kg	1,300	0.012 U	0.017 U	N/A	0.0086 U	N/A	N/A	N/A
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.012 U	0.017 U	N/A	0.0086 U	N/A	N/A	N/A
Acetone Benzene	mg/kg	670,000 5.1	0.033 0.0062 U	0.013 J 0.0086 U	N/A N/A	0.019 J 0.0043 U	N/A N/A	N/A N/A	N/A N/A
Carbon tetrachloride	mg/kg	2.9	0.0062 U	0.0086 U	N/A N/A	0.0043 U 0.0043 U	N/A N/A	N/A	N/A
Cyclohexane	mg/kg mg/kg	27,000	0.0062 U 0.012 U	0.0086 U 0.017 U	N/A N/A	0.0043 U 0.0086 U	N/A N/A	N/A	N/A
Ethylbenzene	mg/kg	25	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
Methyl Acetate	mg/kg	1,200,000	0.062 U	0.086 U	N/A	0.043 U	N/A	N/A	N/A
Styrene	mg/kg	35,000	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
Tetrachloroethene	mg/kg	100	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
Toluene	mg/kg	47,000	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
Trichloroethene	mg/kg	6	0.0062 U	0.0086 U	N/A	0.0043 U	N/A	N/A	N/A
Xylenes	mg/kg	2,800	0.019 U	0.026 U	N/A	0.013 U	N/A	N/A	N/A
Semi-Volatile Organic Compoun									
1,1-Biphenyl	mg/kg	200	0.064 J	0.09 U	0.076 U	0.073 U	0.078 U	0.078 U	0.022 J
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.077 U	0.09 U	0.076 U	0.073 U	0.078 U	0.078 U	0.073 U
2,4-Dimethylphenol	mg/kg	16,000	0.41	0.09 U	0.035 J	0.073 U	0.078 U	0.078 U	0.073 U
2,4-Dinitrophenol	mg/kg	1,600	0.19 U	0.23 U	0.19 R	0.18 U	0.2 U	0.19 U	0.18 U
2-Chloronaphthalene	mg/kg	60,000	0.077 U	0.09 U	0.076 U	0.073 U	0.078 U	0.078 U	0.073 U
2-Methylnaphthalene	mg/kg	3,000	0.2	0.019	0.15	0.056 J	0.016 J	0.003 J	0.19
2-Methylphenol	mg/kg	41,000	0.058 J	0.09 U	0.076 R	0.073 U	0.078 U	0.078 U	0.073 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.33	0.18 U	0.15 R	0.15 U	0.16 U	0.15 U	0.15 U
4-Chloroaniline	mg/kg	11	0.077 U	0.09 U	0.076 U	0.073 U	0.078 U	0.078 U	0.073 U
Acenaphthene	mg/kg	45,000	0.069	0.0045 J	0.098	0.022 J	0.016 J	0.0006 J	0.058 J
Acenaphthylene	mg/kg	45,000	0.035	0.012	0.15	0.034 J	0.078 UJ	0.0041 J	0.17
Acetophenone	mg/kg	120,000	0.077 U	0.09 U	0.027 J	0.028 J	0.078 U	0.078 U	0.02 J
Anthracene	mg/kg	230,000	0.034	0.02	0.087 J	0.053 J	0.009 J	0.0099	0.33
Benz[a]anthracene	mg/kg	21	0.092	0.1	0.0084	0.27	0.047 J	0.038	0.91
Benzaldehyde Benzo[a]pyrene	mg/kg mg/kg	120,000 2.1	0.077 U 0.086	0.09 U 0.14	0.076 U 0.0029 J	0.023 J 0.29	0.053 J 0.071 J	0.078 U 0.028	0.025 J 0.8
Benzo[b]fluoranthene	mg/kg	2.1	0.080	0.14	0.0029 3	0.29	0.071 3	0.028	1.5
Benzo[g,h,i]perylene	mg/kg	21	0.25	0.063	0.015 0.0059 J	0.41	0.14 0.047 J	0.00	0.41
Benzo[k]fluoranthene	mg/kg	210	0.25	0.35	0.0037 3	0.12	0.0473	0.048	1.2
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.077 U	0.09 U	0.076 U	0.67 J	0.078 U	0.078 U	0.057 B
Caprolactam	mg/kg	400,000	0.19 U	0.23 U	1.3	0.043 J	0.2 U	0.19 U	0.023 J
Carbazole	mg/kg	,	0.022 J	0.09 U	0.076 U	0.073 U	0.078 U	0.078 U	0.078 J
Chrysene	mg/kg	2,100	0.15	0.12	0.026	0.32	0.043 J	0.032	0.82
Dibenz[a,h]anthracene	mg/kg	2.1	0.014	0.021	0.0075 U	0.072 J	0.078 U	0.0043 J	0.15
Di-n-butylphthalate	mg/kg	82,000	0.022 J	0.09 U	0.054 B	0.062 B	0.078 U	0.078 U	0.05 B
Di-n-ocytlphthalate	mg/kg	8,200	0.077 U	0.09 U	0.076 U	0.073 UJ	0.078 UJ	0.078 UJ	0.073 UJ
Fluoranthene	mg/kg	30,000	0.2	0.2	0.03 J	0.31	0.058 J	0.062	1.3
Fluorene	mg/kg	30,000	0.057	0.0043 J	0.071	0.016 J	0.078 UJ	0.0013 J	0.094
Hexachloroethane	mg/kg	8	0.077 U	0.09 U	0.039 J	0.031 J	0.078 U	0.078 U	0.073 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.039	0.058	0.0039 J	0.18	0.043 J	0.013	0.49
Isophorone	mg/kg	2,400	0.077 U	0.09 U	0.1	0.073 U	0.078 U	0.078 U	0.073 U
Naphthalene	mg/kg	17	0.1	0.017	0.042	0.044 J	0.078 UJ	0.0079 UJ	0.18
N-Nitrosodiphenylamine	mg/kg	470	0.077 U	0.09 U	0.88	0.035 J	0.078 U	0.078 U	0.073 U
Phenanthrene Phenol	mg/kg	250,000	0.26 1.1	0.1 0.09 U	0.87 J 0.076 R	0.14 0.073 U	0.043 J 0.078 U	0.024 J 0.078 U	0.073 U
	mg/kg		0.19					0.078 U 0.047	
Pyrene PCBs	mg/kg	23,000	U.19	0.18	0.38 J	0.39	0.055 J	U.U4 /	0.99
Aroclor 1242	mg/kg	0.97	0.0576 U	N/A	0.019 U	N/A	0.019 U	N/A	0.019 U
Aroclor 1248	mg/kg	0.97	0.0576 U	N/A N/A	0.019 U	N/A N/A	0.019 U	N/A	0.019 U
Aroclor 1248 Aroclor 1254	mg/kg	0.94	0.0376 0	N/A	0.019 U	N/A	0.019 U	N/A	0.019 U
Aroclor 1260	mg/kg	0.97	0.071 0.0576 U	N/A	0.019 U	N/A	0.019 U	N/A	0.019 U
Aroclor 1262	mg/kg	0.23	0.0576 U	N/A N/A	0.019 U	N/A	0.019 U	N/A	0.019 U
Aroclor 1268	mg/kg		0.0576 U	N/A	0.019 U	N/A	0.019 U	N/A	0.019 U
PCBs (total)	mg/kg	0.97	0.0370 8	N/A	0.017 U	N/A	0.017 U	N/A	0.017 U
TPH/Oil and Grease	g/ Kg	3.71	J.U. I	1 1/2 1	0.15 0	13/21	0.110	1 1/1 1	0.13 0
Diesel Range Organics	mg/kg	6,200	729	56.5	1,310 J	218 J	81.5 J	5.4 B	53.3 J
Gasoline Range Organics	mg/kg	_	15.1 U	21.3 U	20.4	2.9 B	5.8 B	5.2 B	3.4 B
Oil and Grease	mg/kg	6,200	N/A	N/A	1,240	3,230	4,700	248	460

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

13.1.1-Trichbortenteme	Parameter	Units	PAL	B2-006-SB-4	B2-041-SB-1*	B2-041-SB-5*	B2-042-SB-1	B2-042-SB-5	B2-063-SB-1*	B2-063-SB-5*
1.1. Dischlorocheme mg/sg 16	Volatile Organic Compounds									
1,2,3,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,	1,1,1-Trichloroethane	mg/kg	36,000	N/A	0.0046 U	N/A	N/A	N/A	N/A	N/A
12.4-Trisk-disorbenome	1,1-Dichloroethane	mg/kg								
1.2 Dickhorobexezere	* *									
2-Phetasens (AEEK) mag/s 190,000 NA 0.0092 U NA NA NA NA NA NA NA										
Missamore										
Medicyl-Specimens (MIRK) mg/kg 56,000 N.A 0.0092 U N.A	` /									
No.										
Trigonome Trig	· · · · · · · · · · · · · · · · · · ·									
Carbon tenschierde										
Cyclobexame										
Debugstrame										
Methyl Acetare	·									
Styreng	· ·									
Ternschloreschene	•									
Tolleane	J									
Trichlorocheme										
Nylenes	Trichloroethene		-							
Semi-Volatile Organic Compounds										
11-Bipheny mg/kg 200			_,500	1,111	3.011.0	1011	1011	11	1011	1.771
12.4.5.Testeachlorobenzeme	1,1-Biphenyl		200	0.063 J	0.069 U	0.021 J	0.073 U	0.071 U	0.73 U	0.08
2.4-Dimstylphenol mg/kg 1.6,000 0.089 J 0.069 U 0.078 U 0.078 R 0.071 R 0.073 U 0.068 U 2.4-Dimstylphenol mg/kg 1.6,000 0.2 U 0.078 U 0.078 U 0.078 U 0.071 U 0.73 U 0.085 U 2.4-Dimstylphenol mg/kg 3,000 0.6 0.03 J 0.21 0.0090 J 0.056 J 0.085 U 2.4-Beltylphenol mg/kg 3,000 0.6 0.03 J 0.21 0.0090 J 0.056 J 0.073 U 0.071 R 0.73 U 0.085 U 2.4-Beltylphenol(m/g Cresol) mg/kg 41,000 0.039 J 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.085 U 3.4-Beltylphenol(m/g Cresol) mg/kg 41,000 0.12 J 0.14 U 0.16 U 0.14 R 0.14 R 1.5 U 0.03 J 4.5-Beltylphenol mg/kg 45,000 0.044 J 0.085 J 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U 4.5-Beltylphenol mg/kg 45,000 0.044 J 0.085 J 0.085 J 0.009 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U 4.5-Beltylphenol mg/kg 45,000 0.044 J 0.085 J 0.015 0.0074 U 0.02 J 0.31 J 0.035 4.5-Beltylphenol mg/kg 120,000 0.045 J 0.069 U 0.024 J 0.0074 U 0.073 U 0.0	1									
2-4D-mitrophenol mg/kg 1.600 0.2 U 0.17 U 0.2 U 0.18 R 0.18 R 1.8 U 0.2 U	2,4-Dimethylphenol									
2-Chloromphthalene										
2-Methylphenol	2-Chloronaphthalene									
2-Methylphenel mg/kg 41,000 0.039 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U	2-Methylnaphthalene		3,000	0.6	0.03 J	0.21	0.00098 J	0.056 J	0.085	0.21
He-Chiromailine	2-Methylphenol		41,000	0.039 J	0.069 U	0.078 U	0.073 R		0.73 U	0.08 U
Accanphthylene	3&4-Methylphenol(m&p Cresol)			0.12 J	0.14 U	0.16 U	0.14 R			0.03 J
Accaphbylene	4-Chloroaniline	mg/kg	11	0.082 U	0.069 U	0.078 U	0.073 U	0.071 U	0.73 U	0.08 U
Acctophenone	Acenaphthene	mg/kg	45,000	0.044 J	0.0051 J	0.0048 J	0.00057 J	0.019 J	0.038	0.018
Anthracene mg/kg 230,000 0.22 0.043 J 0.027 0.0007 J 0.038 J 0.49 0.073 Benz/alanthracene mg/kg 21 0.54 0.11 0.07 0.0052 J 0.085 J 0.085	Acenaphthylene	mg/kg	45,000	0.12	0.031 J	0.015	0.0074 U	0.02 J	0.31	0.035
Benz a anthracene	Acetophenone	mg/kg	120,000	0.045 J	0.069 U	0.024 J	0.073 U	0.071 U	0.73 U	0.048 J
Benzaldchyde	Anthracene	mg/kg	230,000	0.22	0.043 J	0.027	0.0007 J	0.038 J	0.49	0.073
Benzo s pyrene mg/kg 2.1 0.51 0.12 0.062 0.003 J 0.075 1.7 0.41	Benz[a]anthracene	mg/kg	21	0.54	0.11	0.07	0.0052 J	0.085	2.1	0.43
Benzo[b]fluoranthene mg/kg 0.53 0.15 0.0059 J 0.11 2.6 0.91	Benzaldehyde	mg/kg		0.11 J	0.069 U	0.078 U	0.073 U	0.071 U	0.73 U	0.065 J
Benzo[gh.i]perylene mg/kg 0.53 0.17 0.047 0.0026 J 0.076 0.54 0.14	Benzo[a]pyrene			0.51						
Benzo[k]fluoranthene			21							
bis(2-Ethylhexyl)phthalate mg/kg 400,000 0.09 B 0.026 J 0.078 U 0.073 U 0.028 J 0.73 U 0.019 J Caprolactam mg/kg 400,000 0.066 J 0.17 U 0.05 J 0.18 U 0.18 U 1.8 U 0.067 J 0.011 U 0.05 J 0.011 U 0.073 U 0.071 U 0.05 J 0.011 U 0.05 J 0.013 J 0.077 U 0.045 J 0.011 U 0.058 D 0.069 D 0.014 U 0.001 U 0.0074 U 0.031 J 0.29 U 0.059 D 0.009 D 0.078 U 0.078 U 0.073 U 0.071 U 0.73 U 0.019 J 0.019 J 0.009 U 0.078 U 0.073 U 0.071 U 0.73 U 0.019 J 0.019 J 0.071 U 0.073 U 0.019 J 0.019 J 0.019 J 0.009 U 0.078 U 0.073 U 0.071 U 0.73 U	10 11 1								0.54	
Caprolactam	L 1									
Carbazole	\ • • /1									
Chrysene	*		400,000							
Dibenz[a,h]anthracene mg/kg 2.1 0.15 0.027 J 0.014 0.0074 U 0.031 J 0.29 0.059 Din-butylphthalate mg/kg 82,000 0.058 B 0.069 U 0.078 U 0.069 B 0.13 B 0.73 U 0.019 J Din-ocytlphthalate mg/kg 82,000 0.082 UJ 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U Din-ocytlphthalate mg/kg 30,000 0.9 0.19 0.1 0.0067 J 0.11 3.4 0.47 Din-ocytlphthalate mg/kg 30,000 0.9 0.19 0.1 0.0067 J 0.11 3.4 0.47 Din-ocytlphthalate mg/kg 30,000 0.95 J 0.069 U 0.012 0.0074 U 0.018 J 0.12 0.04 Hexachlorochane mg/kg 8 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Ideno[1,2,3-c,d]pyene mg/kg 2.40 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Isophorone mg/kg 2.400 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U Naphthalene mg/kg 17 0.48 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U Naphthalene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Phenanthrene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Phenanthrene mg/kg 250,000 0.046 J 0.069 U 0.078 U 0.073 R 0.071 U 0.73 U 0.018 J Pyrene mg/kg 23,000 0.73 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U Pyrene mg/kg 23,000 0.73 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U Pyrene mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1242 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1263 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1266 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg 0.99 N/A 0.017			2.100							
Di-n-butylphthalate	·									
Display	L · 1									
Fluoranthene mg/kg 30,000 0.9 0.19 0.1 0.0067 J 0.11 3.4 0.47 Fluorene mg/kg 30,000 0.053 J 0.069 U 0.012 0.0074 U 0.018 J 0.12 0.04 Hexachloroethane mg/kg 8 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J 0.16	¥ 1									
Fluorene mg/kg 30,000 0.053 J 0.069 U 0.012 0.0074 U 0.018 J 0.12 0.04 Hexachloroethane mg/kg 8 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Indeno[1,2,3-c,d]pyrene mg/kg 21 0.41 0.14 0.037 0.0023 J 0.06 J 0.64 0.14 Sophorone mg/kg 2,400 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U Naphthalene mg/kg 17 0.48 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U Naphthalene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Naphthalene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 U Naphthalene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Naphthalene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Naphthalene mg/kg 1.2 0.096 0.25 0.0045 J 0.097 1.8 0.38 Phenol mg/kg 250,000 0.046 J 0.069 U 0.078 U 0.073 U 0.071 R 0.73 U 0.08 U Naphthalene mg/kg 23,000 0.73 0.18 0.096 0.0058 J 0.1 2.8 0.45 PCBs **PCB** **Aroclor 1242	v 1									
Hexachloroethane										
Indeno[1,2,3-c,d]pyrene mg/kg 21 0.41 0.14 0.037 0.0023 J 0.06 J 0.64 0.14 Isophorone mg/kg 2,400 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U Naphthalene mg/kg 17 0.48 0.069 U 0.15 0.0074 U 0.078 0.12 0.18 N-Nitrosodiphenylamine mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Phenanthrene mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J Phenol mg/kg 250,000 0.046 J 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U Pyrene mg/kg 23,000 0.73 0.18 0.096 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U Pyrene mg/kg 23,000 0.73 0.18 0.096 0.0058 J 0.1 2.8 0.45 PCBs Aroclor 1242 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1248 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1254 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A PTH/Oil and Grease Diesel Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J										
Sophorone mg/kg 2,400 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.08 U										
Naphthalene mg/kg 17	Isophorone									
N-Nitrosodiphenylamine mg/kg 470 0.082 U 0.069 U 0.078 U 0.073 U 0.071 U 0.73 U 0.018 J mg/kg 1.2 0.096 0.25 0.0045 J 0.097 1.8 0.38 Phenol mg/kg 250,000 0.046 J 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U Pyrene mg/kg 23,000 0.73 0.18 0.096 0.0058 J 0.1 2.8 0.45 PCBs Aroclor 1242 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1254 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1262 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A 0.010 1268 mg/kg 0.97 N/A 0.010 U N/A 0.010 U N/A 0.010 U N/A 0.010 U N/A 0.000 U N/	Naphthalene									
Phenanthrene mg/kg mg/kg 250,000 0.046 J 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U	N-Nitrosodiphenylamine									
Phenol mg/kg 250,000 0.046 J 0.069 U 0.078 U 0.073 R 0.071 R 0.73 U 0.08 U	Phenanthrene									
Pyrene mg/kg 23,000 0.73 0.18 0.096 0.0058 J 0.1 2.8 0.45 PCBs Aroclor 1242 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1248 mg/kg 0.94 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1254 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A PTH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Phenol		250,000							
PCBs Aroclor 1242 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1248 mg/kg 0.94 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1254 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133	Pyrene		-		0.18					0.45
Aroclor 1248	PCBs									
Aroclor 1248 mg/kg 0.94 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1254 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Aroclor 1242	mg/kg	0.97	N/A	0.017 U	N/A	0.018 U	N/A	0.092 U	N/A
Aroclor 1254 mg/kg 0.97 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1260 mg/kg 0.99 N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1262 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Aroclor 1248		0.94	N/A	0.017 U	N/A	0.018 U	N/A	0.092 U	N/A
Aroclor 1262 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A PTH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Aroclor 1254	mg/kg	0.97	N/A	0.017 U	N/A	0.018 U	N/A	0.092 U	N/A
Aroclor 1268 mg/kg N/A 0.017 U N/A 0.018 U N/A 0.092 U N/A PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Aroclor 1260	mg/kg	0.99	N/A		N/A	0.018 U	N/A	0.092 U	N/A
PCBs (total) mg/kg 0.97 N/A 0.12 U N/A 0.13 U N/A 0.83 U N/A FPH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Aroclor 1262	mg/kg		N/A	0.017 U	N/A	0.018 U	N/A	0.092 U	N/A
TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	Aroclor 1268	mg/kg								
Diesel Range Organics mg/kg 6,200 90.5 J 46 71.1 10.6 J 47.2 J 125 133 Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	PCBs (total)	mg/kg	0.97	N/A	0.12 U	N/A	0.13 U	N/A	0.83 U	N/A
Gasoline Range Organics mg/kg 6,200 3.5 B 5.8 J 20.5 4 B 3 B 12.5 U 3.4 J	TPH/Oil and Grease									
	Diesel Range Organics									
Oil and Grease mg/kg 6,200 552 289 202 77.7 J- 288 J- 497 371	Gasoline Range Organics									
	Oil and Grease	mg/kg	6,200	552	289	202	77.7 J-	288 J-	497	371

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B2-068-SB-1*	B2-068-SB-5*	B23-013-SB-1*	B23-013-SB-5*	B23-029-SB-1.5*	B23-029-SB-5*
Volatile Organic Compounds	- CIIII	1112						
1,1,1-Trichloroethane	mg/kg	36,000	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
1,1-Dichloroethane	mg/kg	16	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
1,2,3-Trichlorobenzene	mg/kg	930	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
1,2,4-Trichlorobenzene	mg/kg	110	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
1,2-Dichlorobenzene	mg/kg	9,300	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
2-Butanone (MEK)	mg/kg	190,000	N/A	N/A	0.013 U	0.015 U	N/A	N/A
2-Hexanone	mg/kg	1,300	N/A	N/A	0.013 U	0.015 U	N/A	N/A
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	N/A	N/A	0.013 U	0.015 U	N/A	N/A
Acetone	mg/kg	670,000 5.1	N/A N/A	N/A N/A	0.013 U 0.0066 U	0.013 J 0.0077 U	N/A N/A	N/A N/A
Benzene Carbon tetrachloride	mg/kg mg/kg	2.9	N/A N/A	N/A	0.0066 U	0.0077 U	N/A	N/A N/A
Cyclohexane	mg/kg	27,000	N/A	N/A	0.000 U	0.0077 U	N/A	N/A
Ethylbenzene	mg/kg	25	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
Methyl Acetate	mg/kg	1,200,000	N/A	N/A	0.066 U	0.077 U	N/A	N/A
Styrene	mg/kg	35,000	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
Tetrachloroethene	mg/kg	100	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
Toluene	mg/kg	47,000	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
Trichloroethene	mg/kg	6	N/A	N/A	0.0066 U	0.0077 U	N/A	N/A
Xylenes	mg/kg	2,800	N/A	N/A	0.02 U	0.023 U	N/A	N/A
Semi-Volatile Organic Compoun				1	ı	1		
1,1-Biphenyl	mg/kg	200	0.072 U	0.077 U	0.24 J	0.087 U	0.074 U	0.079 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.072 U	0.077 U	0.77 U	0.087 U	0.02 J	0.073 J
2,4-Dimethylphenol	mg/kg	16,000	0.072 U	0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
2,4-Dinitrophenol 2-Chloronaphthalene	mg/kg mg/kg	1,600 60,000	0.18 U 0.072 U	0.19 U 0.077 U	1.9 U 0.77 U	0.22 U 0.087 U	0.071 J 0.043 J	0.2 U 0.049 J
2-Unioronaphthalene 2-Methylnaphthalene	mg/kg mg/kg	3,000	0.072 U 0.0067 J	0.0770	2.8	0.087 0	0.043 J	0.049 J 0.16
2-Methylphenol	mg/kg	41,000	0.073 U	0.031 0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.14 U	0.15 U	1.5 U	0.17 U	0.15 U	0.16 U
4-Chloroaniline	mg/kg	11	0.072 U	0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
Acenaphthene	mg/kg	45,000	0.00092 J	0.012	0.043 J	0.0088 U	0.023	0.013
Acenaphthylene	mg/kg	45,000	0.0041 J	0.022	0.11	0.0088 U	0.17	0.15
Acetophenone	mg/kg	120,000	0.072 U	0.077 U	0.36 J	0.087 U	0.019 J	0.021 J
Anthracene	mg/kg	230,000	0.0049 J	0.06	0.22	0.0029 J	0.13	0.12
Benz[a]anthracene	mg/kg	21	0.024	0.25	0.55	0.0033 J	0.37	0.44
Benzaldehyde	mg/kg	120,000	0.072 U	0.017 J	0.43 J	0.025 J	0.039 J	0.046 J
Benzo[a]pyrene	mg/kg	2.1	0.025	0.24	0.54	0.0019 J	0.42	0.41
Benzo[b]fluoranthene	mg/kg	21	0.064	0.37	0.91	0.0054 J	0.66	1.3
Benzo[g,h,i]perylene Benzo[k]fluoranthene	mg/kg	210	0.02 0.051	0.098 0.12	0.41	0.0017 J 0.0088 U	0.34	0.16 1.2
bis(2-Ethylhexyl)phthalate	mg/kg mg/kg	160	0.051 0.024 J	0.12 0.077 U	0.38 0.77 U	0.0088 U	0.074 U	0.079 U
Caprolactam	mg/kg	400,000	0.18 U	0.19 U	0.77 U	0.087 U	0.074 C	0.036 J
Carbazole	mg/kg	100,000	0.072 U	0.044 J	0.77 U	0.087 U	0.025 J	0.030 J
Chrysene	mg/kg	2,100	0.026	0.22	0.9	0.02	0.44	0.46
Dibenz[a,h]anthracene	mg/kg	2.1	0.0047 J	0.038	0.16	0.0088 U	0.14	0.08
Di-n-butylphthalate	mg/kg	82,000	0.072 U	0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
Di-n-ocytlphthalate	mg/kg	8,200	0.058 J	0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
Fluoranthene	mg/kg	30,000	0.048	0.43	0.7	0.007 J	0.41	0.47
Fluorene	mg/kg	30,000	0.001 J	0.016	0.066 J	0.002 J	0.031	0.018
Hexachloroethane	mg/kg	8	0.072 U	0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21 2,400	0.016 0.072 U	0.1 0.077 U	0.46 0.77 U	0.0088 U 0.087 U	0.33 0.074 U	0.19 0.079 U
Isophorone Naphthalene	mg/kg mg/kg	2,400	0.072 U 0.0068 J	0.0770	1.9	0.087 U 0.049	0.074 U 0.31	0.079 U 0.11
N-Nitrosodiphenylamine	mg/kg	470	0.0008 J 0.072 U	0.037 0.077 U	0.77 U	0.049 0.087 U	0.074 U	0.079 U
Phenanthrene	mg/kg	170	0.072 0	0.25	2	0.0078	0.4	0.33
Phenol	mg/kg	250,000	0.072 U	0.077 U	0.77 U	0.087 U	0.074 U	0.079 U
Pyrene	mg/kg	23,000	0.046	0.38	0.6	0.007 J	0.37	0.42
PCBs								
Aroclor 1242	mg/kg	0.97	0.018 U	N/A	0.19 U	N/A	0.018 U	N/A
Aroclor 1248	mg/kg	0.94	0.018 U	N/A	0.19 U	N/A	0.018 U	N/A
Aroclor 1254	mg/kg	0.97	0.018 U	N/A	0.19 U	N/A	0.018 U	N/A
Aroclor 1260	mg/kg	0.99	0.018 U	N/A	0.19 U	N/A	0.018 U	N/A
Aroclor 1262	mg/kg		0.018 U	N/A	0.19 U	N/A	0.018 U	N/A
Aroclor 1268	mg/kg		0.018 U	N/A	0.19 U	N/A	0.018 U	N/A
PCBs (total)	mg/kg	0.97	0.16 U	N/A	1.7 U	N/A	0.16 U	N/A
TPH/Oil and Grease	и	6.200	10.5	00.5	1	0.7	- · -	
Diesel Range Organics	mg/kg	6,200	42.6	93.6	105	8 J	54.5	51
Gasoline Range Organics		6,200	8.4 U	12.4 U	15.5	17.6 U	16.7 U	15.8 U
Oil and Grease	mg/kg	6,200	178	253	1,180	587	331	361

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B5-007-SB-1	B5-008-SB-1	B5-009-SB-1*	B5-009-SB-5*	B5-010-SB-1*	B5-010-SB-7*	B5-010-SB-10*
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
1,1-Dichloroethane	mg/kg	16	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
1,2,3-Trichlorobenzene	mg/kg	930	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
1,2,4-Trichlorobenzene	mg/kg	110	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
1,2-Dichlorobenzene	mg/kg	9,300	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
2-Butanone (MEK)	mg/kg	190,000	0.016 U	0.013 U	0.012 U	0.0088 U	0.008 U	0.016 U	N/A
2-Hexanone	mg/kg	1,300	0.016 U	0.013 U	0.012 U	0.0088 U	0.008 U	0.016 U	N/A
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.016 U	0.013 U	0.012 U	0.0088 U	0.008 U	0.016 U	N/A
Acetone Benzene	mg/kg	670,000 5.1	0.12 J 0.0082 U	0.084 J 0.0067 U	0.012 U 0.0059 U	0.0088 U 0.0044 U	0.071 0.004 U	0.016 U 0.13	N/A N/A
Carbon tetrachloride	mg/kg mg/kg	2.9	0.0082 U 0.0082 U	0.0067 U	0.0059 U	0.0044 U 0.0044 U	0.004 U 0.004 U	0.0078 U	N/A N/A
Cyclohexane	mg/kg	27,000	0.0082 U 0.016 U	0.0067 U 0.013 U	0.0039 U 0.012 U	0.0044 U 0.0088 U	0.004 U	0.0078 U 0.016 U	N/A
Ethylbenzene	mg/kg	27,000	0.010 U	0.013 U 0.0067 U	0.012 U 0.0059 U	0.0088 U 0.0044 U	0.008 U 0.004 U	0.010 0	N/A
Methyl Acetate	mg/kg	1,200,000	0.082 U	0.067 U	0.059 U	0.044 U	0.04 U	0.078 U	N/A
Styrene	mg/kg	35,000	0.0082 U	0.007 U	0.0059 U	0.0044 U	0.004 U	0.015	N/A
Tetrachloroethene	mg/kg	100	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
Toluene	mg/kg	47,000	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.27	N/A
Trichloroethene	mg/kg	6	0.0082 U	0.0067 U	0.0059 U	0.0044 U	0.004 U	0.0078 U	N/A
Xylenes	mg/kg	2,800	0.025 U	0.02 U	0.018 U	0.013 U	0.012 U	0.6	N/A
Semi-Volatile Organic Compoun									
1,1-Biphenyl	mg/kg	200	7.5 U	7.7 U	7.5 U	7.3 U	3.1 J	9.2 U	N/A
1,2,4,5-Tetrachlorobenzene	mg/kg	350	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
2,4-Dimethylphenol	mg/kg	16,000	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
2,4-Dinitrophenol	mg/kg	1,600	18.7 U	19.3 U	18.8 U	18.2 U	18.9 U	23 U	N/A
2-Chloronaphthalene	mg/kg	60,000	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
2-Methylnaphthalene	mg/kg	3,000	0.15 U	0.15 U	0.04 J	0.043 J	3.5	1.4	N/A
2-Methylphenol	mg/kg	41,000	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	15 U	15.5 U	15.1 U	14.6 U	15.1 U	18.4 U	N/A
4-Chloroaniline	mg/kg	11	7.5 UJ	7.7 UJ	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Acenaphthene	mg/kg	45,000	0.023 J	0.15 U	0.15 U	0.025 J	16.2	0.078	N/A
Acenaphthylene	mg/kg	45,000	0.019 J	0.15 U	0.096 J	0.23	21.4	0.33	N/A
Acetophenone	mg/kg	120,000	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Anthracene Benz[a]anthracene	mg/kg mg/kg	230,000	0.09 J 0.37 J	0.02 J 0.057 J	0.081 J 0.14 J	0.19	30.7 38.1	0.3 0.26	N/A N/A
Benzaldehyde	mg/kg	120,000	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A N/A
Benzo[a]pyrene	mg/kg	2.1	0.23 J	0.032 J	0.13 J	0.74	31.4	0.13	N/A
Benzo[b]fluoranthene	mg/kg	21	0.61 J	0.096 J	0.18	1.7	52.6	0.29	N/A
Benzo[g,h,i]perylene	mg/kg	21	0.1 J	0.025 J	0.12 J	0.28	8	0.044	N/A
Benzo[k]fluoranthene	mg/kg	210	0.18 J	0.022 J	0.071 J	0.5	18.3	0.093	N/A
bis(2-Ethylhexyl)phthalate	mg/kg	160	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Caprolactam	mg/kg	400,000	18.7 U	19.3 U	18.8 U	18.2 U	18.9 U	23 U	N/A
Carbazole	mg/kg		7.5 U	7.7 U	7.5 U	7.3 U	47.1	9.2 U	N/A
Chrysene	mg/kg	2,100	0.8 J	0.099 J	0.14 J	1	32	0.29	N/A
Dibenz[a,h]anthracene	mg/kg	2.1	0.034 J	0.15 UJ	0.036 J	0.15 J	26.8	0.021	N/A
Di-n-butylphthalate	mg/kg	82,000	7.5 U	7.7 U	7.5 U	7.3 U	7.7	9.2 U	N/A
Di-n-ocytlphthalate	mg/kg	8,200	7.5 UJ	7.7 UJ	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Fluoranthene	mg/kg	30,000	0.55	0.061 J	0.29	1.5	116	0.65	N/A
Fluorene	mg/kg	30,000	0.018 J	0.15 U	0.056 J	0.057 J	28.9	0.17	N/A
Hexachloroethane	mg/kg	8 21	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Indeno[1,2,3-c,d]pyrene Isophorone	mg/kg mg/kg	2,400	0.089 J 7.5 U	0.15 UJ 7.7 U	0.051 J 7.5 U	0.32 7.3 U	10.2 7.6 U	0.052 9.2 U	N/A N/A
Naphthalene	mg/kg mg/kg	17	0.021 B	0.15 U	0.43	0.41	7.5	72.9	0.0086 B
N-Nitrosodiphenylamine	mg/kg	470	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Phenanthrene	mg/kg	7/0	0.3	0.038 J	0.2	0.42	130	0.41	N/A N/A
Phenol	mg/kg	250,000	7.5 U	7.7 U	7.5 U	7.3 U	7.6 U	9.2 U	N/A
Pyrene	mg/kg	23,000	0.44	0.068 J	0.24	2.2	86.1	0.52	N/A
PCBs	<i></i>	-,					3372		
Aroclor 1242	mg/kg	0.97	0.37 U	0.39 U	0.019 U	N/A	0.38 U	N/A	N/A
Aroclor 1248	mg/kg	0.94	0.37 U	0.39 U	0.019 U	N/A	0.38 U	N/A	N/A
				0.19 J	0.099	N/A	0.38 U	N/A	N/A
Aroclor 1254		0.97	0.31 J						
	mg/kg mg/kg	0.97 0.99	0.31 J 0.37 U	0.39 U	0.019 U	N/A	0.38 U	N/A	N/A
Aroclor 1254	mg/kg				0.019 U N/A	N/A N/A	0.38 U N/A	N/A N/A	N/A N/A
Aroclor 1254 Aroclor 1260	mg/kg mg/kg		0.37 U	0.39 U					
Aroclor 1254 Aroclor 1260 Aroclor 1262	mg/kg mg/kg mg/kg		0.37 U N/A	0.39 U N/A	N/A	N/A	N/A	N/A	N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268	mg/kg mg/kg mg/kg mg/kg	0.99	0.37 U N/A N/A	0.39 U N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A	N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg mg/kg mg/kg mg/kg mg/kg	0.99	0.37 U N/A N/A 2.6 U	0.39 U N/A N/A 2.7 U	N/A N/A 0.099 J	N/A N/A N/A	N/A N/A 2.7 U 3,760	N/A N/A N/A	N/A N/A N/A
Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg	0.99	0.37 U N/A N/A 2.6 U	0.39 U N/A N/A 2.7 U	N/A N/A 0.099 J	N/A N/A N/A	N/A N/A 2.7 U	N/A N/A N/A	N/A N/A N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B5-011-SB-1	B5-011-SB-5	B5-041-SB-1	B5-042-SB-1	B5-043-SB-1	B5-043-SB-5	B5-044-SB-1
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
1,1-Dichloroethane	mg/kg	16	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
2-Butanone (MEK)	mg/kg	190,000	0.014 U	0.01 U	0.013 U	0.011 U	0.0092 U	0.0082 U	0.012 U
2-Hexanone	mg/kg	1,300	0.014 U	0.01 U	0.013 U	0.011 U	0.0092 U	0.0082 U	0.012 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.014 U	0.01 U	0.013 U	0.011 U	0.0092 U	0.0082 U	0.012 U
Acetone	mg/kg	670,000	0.058	0.04	0.013 U	0.037	0.04	0.028	0.043
Benzene	mg/kg	5.1	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
Carbon tetrachloride	mg/kg	2.9	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
Cyclohexane	mg/kg	27,000	0.014 U	0.01 U	0.013 U	0.011 U	0.0092 U	0.0082 U	0.012 U
Ethylbenzene	mg/kg	25	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U	0.0041 U	0.006 U
Methyl Acetate	mg/kg	1,200,000	0.068 U	0.052 U	0.067 R 0.0067 U	0.056 R	0.046 R	0.041 R	0.06 R
Styrene Tetrachloroethene	mg/kg	35,000 100	0.0068 U 0.0068 U	0.0052 U 0.0052 U	0.0067 U 0.0067 U	0.0056 U 0.0056 U	0.0046 U 0.0046 U	0.0041 U 0.0041 U	0.006 U 0.014
Toluene	mg/kg mg/kg	47,000	0.0068 U	0.0052 U	0.0067 U 0.0067 U	0.0056 U	0.0046 U 0.0046 U	0.0041 U 0.0041 U	0.014 0.006 U
Trichloroethene	mg/kg	6	0.0068 U	0.0052 U	0.0067 U	0.0056 U	0.0046 U 0.0021 J	0.0041 U 0.0041 U	0.006 U
Xylenes	mg/kg	2,800	0.008 U 0.021 U	0.0032 U 0.016 U	0.0067 U	0.0036 U 0.017 U	0.0021 J 0.014 U	0.0041 U	0.008 U 0.018 U
Semi-Volatile Organic Compoun		2,000	0.021 U	0.010 0	0.02 U	0.01/0	0.01 4 U	0.012 0	0.016 0
1,1-Biphenyl	mg/kg	200	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
2,4-Dimethylphenol	mg/kg	16,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
2,4-Dinitrophenol	mg/kg	1,600	17.8 U	19.2 U	18.2 U	18.5 U	18.8 U	20.1 U	18.8 U
2-Chloronaphthalene	mg/kg	60,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
2-Methylnaphthalene	mg/kg	3,000	0.036 J	0.15 U	0.15 U	0.022 J	0.35	0.07	0.091 J
2-Methylphenol	mg/kg	41,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	14.3 U	15.4 U	14.5 U	14.8 U	15 U	16.1 U	15.1 U
4-Chloroaniline	mg/kg	11	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Acenaphthene	mg/kg	45,000	0.03 J	0.15 U	0.15 U	0.15 U	0.15 U	0.58	0.021 J
Acenaphthylene	mg/kg	45,000	0.047 J	0.022 J	0.15 U	0.15 U	0.09 J	0.023	0.15
Acetophenone	mg/kg	120,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Anthracene	mg/kg	230,000	0.067 J	0.023 J	0.022 J	0.15 U	0.1 J	1.2	0.14 J
Benz[a]anthracene	mg/kg	21	0.34	0.087 J	0.061 J	0.04 J	0.34	1.6	0.74
Benzaldehyde	mg/kg	120,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Benzo[a]pyrene	mg/kg	2.1	0.26	0.057 J	0.037 J	0.032 J	0.31	1.5	0.59
Benzo[b]fluoranthene	mg/kg	21	0.65	0.14 J	0.2	0.12 J	0.79	2.9	1.5
Benzo[g,h,i]perylene	mg/kg	210	0.13 J	0.049 J	0.069 J	0.032 J	0.23	0.7	0.27
Benzo[k]fluoranthene	mg/kg	210	0.64	0.14 J	0.2	0.12 J	0.78	0.88	0.53
bis(2-Ethylhexyl)phthalate	mg/kg	160	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Caprolactam Carbazole	mg/kg	400,000	17.8 U 7.1 U	19.2 U 7.7 U	18.2 U 7.3 U	18.5 U 7.4 U	18.8 U 7.5 U	20.1 U 8 U	18.8 U 7.5 U
Chrysene	mg/kg mg/kg	2,100	0.44	0.082 J	0.14 J	0.08 J	0.37	1.6	0.98
Dibenz[a,h]anthracene	mg/kg	2,100	0.44 0.051 J	0.082 J 0.15 U	0.14 J 0.15 U	0.08 J 0.15 U	0.37 0.072 J	0.22	0.98 0.11 J
Di-n-butylphthalate	mg/kg	82,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Di-n-ocytlphthalate	mg/kg	8,200	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Fluoranthene	mg/kg	30,000	0.61	0.1 J	0.26	0.1 J	0.65	6.6	1.9
Fluorene	mg/kg	30,000	0.024 J	0.15 U	0.02 J	0.15 U	0.021 J	0.59	0.046 J
Hexachloroethane	mg/kg	8	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.12 J	0.031 J	0.03 J	0.019 J	0.22	0.72	0.28
Isophorone	mg/kg	2,400	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Naphthalene	mg/kg	17	0.13 J	0.15 U	0.2	0.2	0.62	0.033	0.23
N-Nitrosodiphenylamine	mg/kg	470	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Phenanthrene	mg/kg		0.31	0.049 J	0.096 J	0.066 J	0.46	7.5	0.49
Phenol	mg/kg	250,000	7.1 U	7.7 U	7.3 U	7.4 U	7.5 U	8 U	7.5 U
Pyrene	mg/kg	23,000	0.48	0.09 J	0.21	0.093 J	0.49	5.2	1.9
PCBs									
Aroclor 1242	mg/kg	0.97	0.18 U	N/A	0.36 U	0.37 U	0.19 U	N/A	0.19 U
Aroclor 1248	mg/kg	0.94	0.18 U	N/A	0.36 U	0.37 U	0.19 U	N/A	0.19 U
Aroclor 1254	mg/kg	0.97	0.18 U	N/A	0.36 U	0.37 U	0.19 U	N/A	0.19 U
Aroclor 1260	mg/kg	0.99	0.18 U	N/A	0.08 J	0.065 J	0.029 J	N/A	0.13 J
Aroclor 1262	mg/kg		N/A						
Aroclor 1268	mg/kg	0.05	N/A						
PCBs (total)	mg/kg	0.97	1.3 U	N/A	2.5 U	2.6 U	1.3 U	N/A	1.3 U
TPH/Oil and Grease		(200	2.50		1==	2.10	20.5		
Diesel Range Organics	mg/kg	6,200	359	69.6	177	349	38.3	5.4 J	262
U decolina Panga ()roonias	II mø/kø	6,200	12.1 U	10.9 U	10.6 U	11.1 U	10.4 U	10.3 U	11.2 U
Gasoline Range Organics Oil and Grease	mg/kg	6,200	N/A						

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B5-044-SB-5	B5-045-SB-1	B5-045-SB-5	B5-058-SB-1	B5-058-SB-5	B5-059-SB-1	B5-068-SB-1*
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.005 U	0.0049 U	0.048	0.0045 U	0.0045 U	0.0053 U	0.0063 U
1,1-Dichloroethane	mg/kg	16	0.005 U	0.0049 U	0.0033 J	0.0045 U	0.0045 U	0.0053 U	0.0063 U
1,2,3-Trichlorobenzene	mg/kg	930	0.005 U	0.0049 U	0.0054 U	0.0045 U	0.0045 U	0.0053 U	0.0063 U
1,2,4-Trichlorobenzene	mg/kg	110	0.005 U	0.0049 U	0.0054 U	0.0045 U	0.0045 U	0.0053 U	0.0063 U
1,2-Dichlorobenzene	mg/kg	9,300	0.005 U	0.0049 U	0.0054 U	0.0045 U	0.0045 U	0.0053 U	0.0063 U
2-Butanone (MEK)	mg/kg	190,000	0.01 U	0.0098 U	0.011 U	0.0089 U	0.009 U	0.011 U	0.013 U
2-Hexanone	mg/kg	1,300 56,000	0.01 U 0.01 U	0.0098 U	0.011 U	0.0089 U 0.0089 U	0.009 U 0.009 U	0.011 U	0.013 U
4-Methyl-2-pentanone (MIBK) Acetone	mg/kg mg/kg	670,000	0.01 U	0.0098 U 0.0098 U	0.011 U 0.043	0.0089 C 0.0089 R	0.009 C 0.009 R	0.011 U 0.051 J	0.013 U 0.013 U
Benzene	mg/kg	5.1	0.01 U	0.0049 U	0.043 0.0054 U	0.0039 K	0.004 K 0.0045 U	0.031 3	0.0063 U
Carbon tetrachloride	mg/kg	2.9	0.005 U	0.0049 U	0.0054 0	0.0037 U	0.0045 U	0.0071 0.0053 U	0.0063 U
Cyclohexane	mg/kg	27,000	0.01 U	0.0098 U	0.007 J	0.0089 U	0.009 U	0.011 U	0.013 U
Ethylbenzene	mg/kg	25	0.005 U	0.0049 U	0.0054 U	0.0045 U	0.0045 U	0.012	0.0063 U
Methyl Acetate	mg/kg	1,200,000	0.05 R	0.049 R	0.054 R	0.045 U	0.045 U	0.053 U	0.063 U
Styrene	mg/kg	35,000	0.005 U	0.0049 U	0.0054 U	0.0045 U	0.0045 U	0.0053 U	0.0063 U
Tetrachloroethene	mg/kg	100	0.005 U	0.0049 U	0.0047 J	0.0045 U	0.0045 U	0.0053 U	0.0063 U
Toluene	mg/kg	47,000	0.005 U	0.0049 U	0.0054 U	0.0032 J	0.0045 U	0.0087	0.0063 U
Trichloroethene	mg/kg	6	0.005 U	0.0049 U	0.0054 U	0.0045 U	0.0045 U	0.0053 U	0.0063 U
Xylenes	mg/kg	2,800	0.015 U	0.015 U	0.016 U	0.013 U	0.014 U	0.014 J	0.019 U
Semi-Volatile Organic Compound		200	7.71	7.533	7.011	7 4 7 7	0.1.11	7211	0.007.7
1,1-Biphenyl	mg/kg	200	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.085 J
1,2,4,5-Tetrachlorobenzene 2,4-Dimethylphenol	mg/kg	350 16,000	7.7 U 7.7 U	7.5 U 7.5 U	7.2 U 7.2 U	7.4 U 7.4 U	8.1 U 8.1 U	7.3 U 7.3 U	0.39 U 0.39 U
2,4-Dimethylphenol 2,4-Dinitrophenol	mg/kg mg/kg	1,600	19.2 U	7.5 U 18.8 U	7.2 U 18.1 U	7.4 U 18.6 U	20.3 U	18.2 U	0.39 U 0.98 U
2,4-Dinitrophenol 2-Chloronaphthalene	mg/kg mg/kg	60,000	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.98 U 0.39 U
2-Methylnaphthalene	mg/kg	3,000	0.0077 U	0.073 J	0.036	0.15	0.0081 U	0.63 J	0.28
2-Methylphenol	mg/kg	41,000	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	15.4 U	15 U	14.4 U	14.9 U	16.2 U	14.5 U	0.78 U
4-Chloroaniline	mg/kg	11	7.7 U	7.5 U	7.2 U	7.4 UJ	8.1 UJ	7.3 UJ	0.39 U
Acenaphthene	mg/kg	45,000	0.0077 U	0.019 J	0.0036 J	0.0022 J	0.0081 U	0.016	1
Acenaphthylene	mg/kg	45,000	0.0077 U	0.087 J	0.024	0.0024 J	0.0081 U	0.0077	0.11 J
Acetophenone	mg/kg	120,000	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.06 J
Anthracene	mg/kg	230,000	0.0077 U	0.099 J	0.037	0.0088	0.0081 U	0.043	3
Benz[a]anthracene	mg/kg	21	0.0077 U	0.48	0.11	0.065	0.0081 U	0.14 J	7.1
Benzaldehyde	mg/kg	120,000	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
Benzo[a]pyrene Benzo[b]fluoranthene	mg/kg	2.1	0.0017 J 0.003 J	0.38	0.097 0.18	0.087 J 0.35 J	0.001 J 0.0028 J	0.11 J 0.42 J	5.6 14.9
Benzo[g,h,i]perylene	mg/kg mg/kg	21	0.003 J 0.0077 U	0.27	0.032	0.35 J 0.048 J	0.0028 J 0.0081 U	0.42 J 0.06 J	1.6
Benzo[k]fluoranthene	mg/kg	210	0.0077 U	1.3	0.052	0.048 J	0.0031 J	0.00 J	11.7
bis(2-Ethylhexyl)phthalate	mg/kg	160	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
Caprolactam	mg/kg	400,000	19.2 U	18.8 U	18.1 U	18.6 U	20.3 U	18.2 U	0.98 U
Carbazole	mg/kg		7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	2.4
Chrysene	mg/kg	2,100	0.0012 J	0.79	0.12	0.11	0.00097 J	0.24 J	6.8
Dibenz[a,h]anthracene	mg/kg	2.1	0.0077 U	0.097 J	0.014	0.02 J	0.0081 U	0.026 J	0.99
Di-n-butylphthalate	mg/kg	82,000	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
Di-n-ocytlphthalate	mg/kg	8,200	7.7 U	7.5 U	7.2 U	7.4 UJ	8.1 UJ	7.3 UJ	0.39 U
Fluoranthene	mg/kg	30,000	0.002 J	1.5	0.29	0.089	0.0021 J	0.2 J	16.2
Fluorene Hexachloroethane	mg/kg	30,000	0.0077 U	0.024 J 7.5 U	0.016	0.0018 J	0.0011 J	0.028	0.30 II
Indeno[1,2,3-c,d]pyrene	mg/kg mg/kg	8 21	7.7 U 0.0077 U	0.23	7.2 U 0.037	7.4 U 0.041 J	8.1 U 0.0081 U	7.3 U 0.045 J	0.39 U 1.8
Isophorone	mg/kg mg/kg	2,400	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
Naphthalene	mg/kg	17	0.0067 B	0.2	3.7	0.15	0.0081 U	0.45 J	0.34
N-Nitrosodiphenylamine	mg/kg	470	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
Phenanthrene	mg/kg		0.0014 J	0.54	0.19	0.11	0.0018 J	0.38	12.5
Phenol	mg/kg	250,000	7.7 U	7.5 U	7.2 U	7.4 U	8.1 U	7.3 U	0.39 U
Pyrene	mg/kg	23,000	0.0019 J	1.3	0.21	0.072	0.0017 J	0.25 J	11.5
PCBs									
Aroclor 1242	mg/kg	0.97	N/A	0.19 U	N/A	0.019 U	N/A	0.93 U	0.0572 U
Aroclor 1248	mg/kg	0.94	N/A	0.19 U	N/A	0.019 U	N/A	0.93 U	0.0572 U
Aroclor 1254	mg/kg	0.97	N/A	0.19 U	N/A	0.019 U	N/A	0.93 U	0.0572 U
Aroclor 1260	mg/kg	0.99	N/A	0.066 J	N/A	0.019 U	N/A	0.93 U	0.0572 U
Aroclor 1262	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	0.0572 U
Aroclor 1268	mg/kg	0.07	N/A	N/A	N/A	N/A	N/A	N/A	0.0572 U
PCBs (total)	mg/kg	0.97	N/A	1.3 U	N/A	0.13 U	N/A	6.5 U	0.0572 U
TDII/O:1 1 C									
TPH/Oil and Grease	m = /1	6 200	<i>E A</i> T	205	20	52 1	0 1 11	170	AFF
Diesel Range Organics	mg/kg	6,200	5.4 J	305	30	53.1	8.1 U	178	455
	mg/kg mg/kg mg/kg		5.4 J 10.2 U N/A	305 9.3 U N/A	30 7.2 J N/A	53.1 11.7 N/A	8.1 U 9.6 U N/A	178 55.5 U N/A	455 14.2 U N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B5-069-SB-1*	B5-069-SB-4*	B5-072-SB-1	B5-072-SB-6	B5-073-SB-1	B5-073-SB-5	B5-073-SB-10
Volatile Organic Compounds	Ulling	1112							
1,1,1-Trichloroethane	mg/kg	36,000	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
1,1-Dichloroethane	mg/kg	16	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
1,2,3-Trichlorobenzene	mg/kg	930	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
1,2,4-Trichlorobenzene	mg/kg	110	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
1,2-Dichlorobenzene	mg/kg	9,300	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
2-Butanone (MEK)	mg/kg	190,000	0.013 U	0.0097 U	0.0087 U	0.0094 U	0.0085	0.01 U	N/A
2-Hexanone	mg/kg	1,300	0.013 U	0.0097 U	0.0087 U	0.0094 U	0.0082 U	0.01 U	N/A
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.013 U	0.0097 U	0.0087 U	0.0094 U	0.0082 U	0.01 U	N/A
Acetone	mg/kg	670,000	0.062	0.0097 U	0.017	0.0094 U	0.048	0.023	N/A
Benzene	mg/kg	5.1	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
Carbon tetrachloride	mg/kg	2.9	0.0063 U 0.013 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U 0.0082 U	0.005 U 0.01 U	N/A N/A
Cyclohexane Ethylbenzene	mg/kg mg/kg	27,000 25	0.013 U	0.0097 U 0.0048 U	0.0087 U 0.0044 U	0.0094 U 0.0047 U	0.0082 U 0.0041 U	0.01 U 0.005 U	N/A N/A
Methyl Acetate	mg/kg		0.003 U	0.0048 U	0.0044 UJ	0.0047 C 0.047 R	0.0041 C 0.041 R	0.003 U 0.05 UJ	N/A
Styrene	mg/kg	35,000	0.0063 U	0.0048 U	0.044 U	0.047 K 0.0047 U	0.041 K 0.0041 U	0.005 U	N/A
Tetrachloroethene	mg/kg	100	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
Toluene	mg/kg	47,000	0.0023 J	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
Trichloroethene	mg/kg	6	0.0063 U	0.0048 U	0.0044 U	0.0047 U	0.0041 U	0.005 U	N/A
Xylenes	mg/kg	2,800	0.019 U	0.015 U	0.013 U	0.014 U	0.012 U	0.015 U	N/A
Semi-Volatile Organic Compoun									
1,1-Biphenyl	mg/kg	200	0.071 J	0.18 J	7.3 U	8.1 U	7.2 U	8 U	N/A
1,2,4,5-Tetrachlorobenzene	mg/kg	350	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
2,4-Dimethylphenol	mg/kg	16,000	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
2,4-Dinitrophenol	mg/kg	1,600	0.91 U	0.95 U	18.3 U	20.2 U	18 U	20 U	N/A
2-Chloronaphthalene	mg/kg	60,000	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
2-Methylnaphthalene	mg/kg	3,000	0.46	0.77	0.51	0.0081 U	0.17	0.041	0.0011 J
2-Methylphenol	mg/kg	41,000	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.73 U	0.76 U	14.6 U	16.2 U	14.4 U	16 U	N/A
4-Chloroaniline	mg/kg	11	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
Acenaphthene	mg/kg	45,000	0.046	0.032	0.48	0.0081 U	0.14 U	0.022	0.0082 U
Acenaphthylene	mg/kg	45,000	0.17	0.063	7.2.11	0.0081 U	0.018 J	0.22	0.0082 U
Acetophenone Anthracene	mg/kg mg/kg	120,000 230,000	0.066 J 0.27	0.087 J 0.2	7.3 U 1.8	8.1 U 0.0081 U	7.2 U 0.041 J	8 U 0.11	N/A 0.0082 U
Benz[a]anthracene	mg/kg	230,000	0.27	0.37	5.4	0.0081 U	0.041 J	0.62	0.0082 U
Benzaldehyde	mg/kg	120,000	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
Benzo[a]pyrene	mg/kg	2.1	1.1	0.37	8.5	0.0081 U	0.12 J	0.66	0.0082 UJ
Benzo[b]fluoranthene	mg/kg	21	2.5	1.2	12.1	0.0081 U	0.39	1.2	0.0029 J
Benzo[g,h,i]perylene	mg/kg		0.27	0.13	2.5	0.0023 J	0.08 J	0.18	0.0082 UJ
Benzo[k]fluoranthene	mg/kg	210	1.9	0.91	5	0.0081 U	0.14 J	0.45	0.0011 J
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
Caprolactam	mg/kg	400,000	0.91 U	0.95 U	18.3 U	20.2 U	18 U	20 U	N/A
Carbazole	mg/kg		0.17 J	0.11 J	7.3 U	8.1 U	7.2 U	8 U	N/A
Chrysene	mg/kg	2,100	0.91	0.57	5.5	0.0081 U	0.25	0.79	0.0013 J
Dibenz[a,h]anthracene	mg/kg	2.1	0.13	0.084	1.4	0.0081 UJ	0.14 U	0.073	0.0082 UJ
Di-n-butylphthalate	mg/kg	82,000	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
Di-n-ocytlphthalate	mg/kg	8,200	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A
Fluoranthene	mg/kg	30,000	1.7	0.68	5.1	0.00096 J	0.24	1.3	0.0019 J
Fluorene	mg/kg	30,000	0.073	0.061	0.34	0.0081 U	0.037 J	0.051	0.0082 U
Hexachloroethane Indeno[1,2,3-c,d]pyrene	mg/kg	8 21	0.36 U 0.34	0.38 U	7.3 U	8.1 U	7.2 U	8 U	N/A 0.0082 UJ
Isophorone	mg/kg mg/kg	2,400	0.34 0.36 U	0.16 0.38 U	2.8 7.3 U	0.0013 J 8.1 U	0.058 J 7.2 U	0.19 8 U	0.0082 UJ N/A
Naphthalene	mg/kg	17	0.36 0	0.59	0.78	0.0021 B	0.24	0.27	0.0024 B
N-Nitrosodiphenylamine	mg/kg	470	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	0.0024 B N/A
Phenanthrene	·	7/0	0.30 0	1	4.4	0.0013 J	0.28	0.55	0.0027 J
Phenol	III6/kb	1		_					N/A
	mg/kg mg/kg	250,000	0.36 U	0.38 U	7.3 U	8.1 U	7.2 U	8 U	1 1/ / 1
Pyrene	mg/kg	250,000 23,000	0.36 U 1.4	0.38 U 0.56	7.3 U 4.6	0.0009 J	7.2 U 0.25	1.2	0.0022 J
Pyrene PCBs	ď								
	mg/kg mg/kg								
PCBs	mg/kg	23,000	1.4	0.56	4.6	0.0009 J	0.25	1.2	0.0022 J
PCBs Aroclor 1242	mg/kg mg/kg	23,000	1.4 0.0554 U	0.56 N/A	4.6 0.18 U	0.0009 J	0.25 0.18 U	1.2 N/A	0.0022 J N/A
PCBs Aroclor 1242 Aroclor 1248	mg/kg mg/kg mg/kg mg/kg	23,000 0.97 0.94	0.0554 U 0.0554 U	0.56 N/A N/A	0.18 U 0.18 U	0.0009 J N/A N/A	0.25 0.18 U 0.18 U	1.2 N/A N/A	0.0022 J N/A N/A
PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254	mg/kg mg/kg mg/kg mg/kg mg/kg	23,000 0.97 0.94 0.97	1.4 0.0554 U 0.0554 U 0.0554 U 0.0554 U 0.0754	0.56 N/A N/A N/A N/A N/A	0.18 U 0.18 U 0.18 U 0.18 U 0.11 J N/A	0.0009 J N/A N/A N/A N/A N/A N/A	0.25 0.18 U 0.18 U 0.18 U 0.97 N/A	N/A N/A N/A N/A N/A N/A	0.0022 J N/A N/A N/A N/A N/A N/A
PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260	mg/kg mg/kg mg/kg mg/kg mg/kg	23,000 0.97 0.94 0.97	1.4 0.0554 U 0.0554 U 0.0554 U 0.0554 U	0.56 N/A N/A N/A N/A	0.18 U 0.18 U 0.18 U 0.11 J N/A N/A	0.0009 J N/A N/A N/A N/A N/A	0.25 0.18 U 0.18 U 0.18 U 0.97	N/A N/A N/A N/A	0.0022 J N/A N/A N/A N/A
PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total)	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	23,000 0.97 0.94 0.97	1.4 0.0554 U 0.0554 U 0.0554 U 0.0554 U 0.0754	0.56 N/A N/A N/A N/A N/A	0.18 U 0.18 U 0.18 U 0.18 U 0.11 J N/A	0.0009 J N/A N/A N/A N/A N/A N/A	0.25 0.18 U 0.18 U 0.18 U 0.97 N/A	N/A N/A N/A N/A N/A N/A	0.0022 J N/A N/A N/A N/A N/A N/A
PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	23,000 0.97 0.94 0.97 0.99	1.4 0.0554 U 0.0554 U 0.0554 U 0.0554 U 0.0754 0.0554 U 0.0754	N/A N/A N/A N/A N/A N/A N/A	0.18 U 0.18 U 0.18 U 0.11 J N/A N/A 1.3 U	N/A N/A N/A N/A N/A N/A N/A	0.25 0.18 U 0.18 U 0.18 U 0.97 N/A N/A 0.97 J	N/A N/A N/A N/A N/A N/A N/A	N/A N/A N/A N/A N/A N/A N/A N/A
PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease Diesel Range Organics	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	0.97 0.94 0.97 0.99 0.97	1.4 0.0554 U 0.0554 U 0.0554 U 0.0554 U 0.0754 0.0554 U 0.0754	N/A N/A N/A N/A N/A N/A N/A N/A	0.18 U 0.18 U 0.18 U 0.11 J N/A N/A 1.3 U	N/A N/A N/A N/A N/A N/A N/A N/A	0.25 0.18 U 0.18 U 0.18 U 0.97 N/A N/A 0.97 J	N/A N/A N/A N/A N/A N/A N/A N/A	N/A
PCBs Aroclor 1242 Aroclor 1248 Aroclor 1254 Aroclor 1260 Aroclor 1262 Aroclor 1268 PCBs (total) TPH/Oil and Grease	mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg mg/kg	23,000 0.97 0.94 0.97 0.99 0.97 6,200 6,200	1.4 0.0554 U 0.0554 U 0.0554 U 0.0554 U 0.0754 0.0554 U 0.0754	N/A N/A N/A N/A N/A N/A N/A	0.18 U 0.18 U 0.18 U 0.11 J N/A N/A 1.3 U	N/A N/A N/A N/A N/A N/A N/A	0.25 0.18 U 0.18 U 0.18 U 0.97 N/A N/A 0.97 J	N/A N/A N/A N/A N/A N/A N/A	0.0022 J N/A N/A N/A N/A N/A N/A N/A N/

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B5-096-SB-1*	B5-096-SB-5*	B5-097-SB-1*	B5-097-SB-4*	B5-104-SB-1*	B5-104-SB-5*	B5-105-SB-1*
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
1,1-Dichloroethane	mg/kg	16	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
1,2,4-Trichlorobenzene	mg/kg	110	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
1,2-Dichlorobenzene	mg/kg	9,300	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
2-Butanone (MEK)	mg/kg	190,000	0.0096 U	0.016 U	0.0091 U	0.015 U	0.0097 U	0.011 U	0.0066 U
2-Hexanone	mg/kg	1,300	0.0096 U	0.016 U	0.0091 U	0.015 U	0.0097 U	0.011 U	0.0066 U
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.0096 U	0.016 U	0.0091 U	0.015 U	0.0097 U	0.011 U	0.0066 U
Acetone	mg/kg	670,000	0.0096 U	0.15	0.092	0.015 U	0.0097 U	0.011 U	0.052
Benzene	mg/kg	5.1	0.0048 U	0.0081 U	0.0028 J	0.0075 U	0.0049 U	0.0055 U	0.0033 U
Carbon tetrachloride	mg/kg	2.9	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
Cyclohexane	mg/kg	27,000	0.0096 U	0.016 U	0.0091 U	0.015 U	0.0097 U	0.011 U	0.0066 U
Ethylbenzene	mg/kg	25	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
Methyl Acetate	mg/kg	1,200,000	0.02 J	0.081 U	0.046 U	0.075 U	0.049 U	0.055 U	0.033 U
Styrene Tetrachloroethene	mg/kg	35,000 100	0.0048 U 0.0048 U	0.0081 U 0.0081 U	0.0046 U 0.0046 U	0.0075 U 0.0075 U	0.0049 U 0.0049 U	0.0055 U 0.0055 U	0.0033 U
Toluene	mg/kg	47,000	0.0048 U	0.0081 U	0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U 0.0033 U
Trichloroethene	mg/kg mg/kg	6	0.0048 U	0.0081 U	0.0026 J 0.0046 U	0.0075 U	0.0049 U	0.0055 U	0.0033 U
Xylenes	mg/kg	2,800	0.0048 U	0.0081 U	0.014 U	0.0073 U	0.0049 U	0.0033 U 0.016 U	0.0033 U 0.0099 U
Semi-Volatile Organic Compoun		2,000	0.017 0	0.027 0	0.017 0	0.022 0	0.013 0	0.010 0	0.0099 0
1,1-Biphenyl	mg/kg	200	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
2,4-Dimethylphenol	mg/kg	16,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
2,4-Dinitrophenol	mg/kg	1,600	18.6 U	18.3 U	18.1 U	18.7 U	17.8 U	20.8 U	18.9 U
2-Chloronaphthalene	mg/kg	60,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
2-Methylnaphthalene	mg/kg	3,000	0.024	0.14 U	0.14 J	0.17	0.047	0.0082 U	0.015
2-Methylphenol	mg/kg	41,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	14.8 U	14.7 U	14.5 U	15 U	14.2 U	16.6 U	15.1 U
4-Chloroaniline	mg/kg	11	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Acenaphthene	mg/kg	45,000	0.0064 J	0.14 U	0.14 U	0.15 U	0.0042 J	0.0082 U	0.0029 J
Acenaphthylene	mg/kg	45,000	0.014	0.14 U	0.026 J	0.028 J	0.005 J	0.0082 U	0.015
Acetophenone	mg/kg	120,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Anthracene	mg/kg	230,000	0.034	0.14 U	0.041 J	0.028 J	0.022	0.0082 U	0.019
Benz[a]anthracene	mg/kg	21	0.1	0.36 U	0.11 J	0.15 U	0.049	0.0082 U	0.046
Benzaldehyde	mg/kg	120,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Benzo[a]pyrene	mg/kg	2.1	0.073	0.037 J	0.29	0.21	0.034	0.0082 U	0.039
Benzo[b]fluoranthene	mg/kg	21	0.18	0.095 J	0.28	0.18	0.11	0.0015 J	0.1
Benzo[g,h,i]perylene	mg/kg		0.038	0.19 J	0.7	0.92	0.018	0.0082 U	0.021
Benzo[k]fluoranthene	mg/kg	210	0.074	0.36 U	0.1 J	0.076 J	0.036	0.00082 J	0.034
bis(2-Ethylhexyl)phthalate	mg/kg	160	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Caprolactam	mg/kg	400,000	18.6 U	18.3 U	18.1 U	18.7 U	17.8 U	20.8 U	18.9 U
Cheryson	mg/kg	2 100	7.4 U	7.3 U 0.69	7.3 U	7.5 U 1.5	7.1 U	8.3 U	7.6 U
Chrysene Dibenz[a,h]anthracene	mg/kg mg/kg	2,100	0.13 0.016	0.69 0.36 U	0.24 0.077 J	0.15 J	0.11 0.0077	0.001 J 0.0082 U	0.062 0.0061 J
Di-n-butylphthalate	mg/kg	82,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Di-n-ocytlphthalate	mg/kg	8,200	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Fluoranthene	mg/kg	30,000	0.18	0.035 J	0.14 J	0.055 J	0.17	0.0015 J	0.12
Fluorene	mg/kg	30,000	0.0076	0.019 J	0.022 J	0.03 J	0.0038 J	0.0013 J	0.0086
Hexachloroethane	mg/kg	8	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.039	0.36 U	0.11 J	0.034 J	0.017	0.0082 U	0.019
Isophorone	mg/kg	2,400	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Naphthalene	mg/kg	17	0.034	0.072 B	0.12 B	0.13 B	0.061	0.002 B	0.062
N-Nitrosodiphenylamine	mg/kg	470	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Phenanthrene	mg/kg		0.077	0.037 J	0.12 J	0.068 J	0.13	0.0013 J	0.074
Phenol	mg/kg	250,000	7.4 U	7.3 U	7.3 U	7.5 U	7.1 U	8.3 U	7.6 U
Pyrene	mg/kg	23,000	0.28	0.12 J	0.18	0.15 J	0.13	0.0012 J	0.11
PCBs									
Aroclor 1242	mg/kg	0.97	0.018 U	N/A	0.36 U	N/A	0.018 U	N/A	0.019 U
Aroclor 1248	mg/kg	0.94	0.018 U	N/A	0.36 U	N/A	0.018 U	N/A	0.019 U
Aroclor 1254	mg/kg	0.97	0.018 U	N/A	0.36 U	N/A	0.15	N/A	0.019 U
Aroclor 1260	mg/kg	0.99	0.2	N/A	0.046 J	N/A	0.018 U	N/A	0.042
Aroclor 1262	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Aroclor 1268	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	N/A
PCBs (total)	mg/kg	0.97	0.2	N/A	2.5 U	N/A	0.15	N/A	0.042 J
TPH/Oil and Grease									
Diesel Range Organics	mg/kg	6,200	58.5	2,100	172	1,540	166	4.6 J	91.8
8 8	1			· ·					
Gasoline Range Organics Oil and Grease	mg/kg mg/kg	6,200 6,200	9.8 U N/A	21.3 U N/A	12.1 U N/A	16.4 U N/A	10.5 U N/A	10.1 U N/A	24.5 N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Parameter	Units	PAL	B5-105-SB-5*	B5-132-SB-1	B5-132-SB-4	B5-133-SB-1	B5-133-SB-5	B5-154-SB-1	B5-154-SB-4
Volatile Organic Compounds									
1,1,1-Trichloroethane	mg/kg	36,000	0.0046 U	0.0054 U	0.0065 U	0.0043 U	0.0048 U	0.0048 U	0.0044 U
1,1-Dichloroethane	mg/kg	16	0.0046 U	0.0054 U	0.0065 U	0.0043 U	0.0048 U	0.0048 U	0.0044 U
1,2,3-Trichlorobenzene	mg/kg	930	0.0046 U	0.0029 J	0.0048 J	0.0043 U	0.0048 U	0.0048 U	0.0044 UJ
1,2,4-Trichlorobenzene	mg/kg	110	0.0046 U	0.0054 J	0.0048 J	0.0043 U	0.0048 U	0.0048 U	0.0044 UJ
1,2-Dichlorobenzene	mg/kg	9,300	0.0046 U	0.0054 U	0.0065 U	0.0043 U	0.0048 U	0.0048 U	0.0044 UJ
2-Butanone (MEK)	mg/kg	190,000	0.0092 U	0.0076 J	0.013 U	0.0087 U	0.0096 U	0.0095 U	0.02
2-Hexanone	mg/kg	1,300	0.0092 U	0.011 U	0.013 U	0.0087 U	0.0096 U	0.0095 U	0.0066 J
4-Methyl-2-pentanone (MIBK)	mg/kg	56,000	0.0092 U	0.011 U	0.013 U	0.0087 U	0.0096 U	0.0095 U	0.0089 U
Acetone	mg/kg	670,000	0.035	0.056	0.026	0.0087 U	0.0096 U	0.038	0.092
Benzene Carbon tetrachloride	mg/kg	5.1 2.9	0.0024 J 0.0046 U	0.0054 U	0.0065 U	0.0043 U	0.0048 J	0.0048 U	0.0041 J 0.0044 U
Cyclohexane	mg/kg mg/kg	27,000	0.0046 U 0.0059 J	0.0054 U 0.011 U	0.0065 U 0.013 U	0.0043 U 0.0087 U	0.0048 U 0.0096 U	0.0048 U 0.0095 U	0.0044 U 0.0089 U
Ethylbenzene	mg/kg	25	0.0039 J 0.0046 U	0.011 U 0.0054 U	0.013 U	0.0087 U 0.0043 U	0.0098 U 0.0048 U	0.0093 U 0.0048 U	0.0089 U 0.0044 U
Methyl Acetate		1,200,000	0.046 U	0.054 UJ	0.065 UJ	0.043 U	0.048 U	0.048 UJ	0.044 UJ
Styrene	mg/kg	35,000	0.0046 U	0.0054 U	0.005 U	0.043 U	0.048 U	0.0048 U	0.0044 U
Tetrachloroethene	mg/kg	100	0.0046 U	0.0054 U	0.0065 U	0.0043 U	0.0048 U	0.0048 U	0.0044 U
Toluene	mg/kg	47,000	0.0019 J	0.0054 U	0.0065 U	0.0043 U	0.0048 U	0.0018 J	0.0026 J
Trichloroethene	mg/kg	6	0.0046 U	0.0054 U	0.0065 U	0.0043 U	0.0048 U	0.0048 U	0.0044 U
Xylenes	mg/kg	2,800	0.014 U	0.016 U	0.02 U	0.013 U	0.014 U	0.014 U	0.013 U
Semi-Volatile Organic Compoun									
1,1-Biphenyl	mg/kg	200	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
1,2,4,5-Tetrachlorobenzene	mg/kg	350	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
2,4-Dimethylphenol	mg/kg	16,000	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
2,4-Dinitrophenol	mg/kg	1,600	18 U	18.1 U	19.2 U	18.5 U	20.1 U	18.7 U	18.9 U
2-Chloronaphthalene	mg/kg	60,000	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
2-Methylnaphthalene	mg/kg	3,000	0.0072 U	0.066 J	0.17	0.087	0.033	0.05 J	0.011
2-Methylphenol	mg/kg	41,000	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	14.4 U	14.5 U	15.3 U	14.8 U	16.1 U	14.9 U	15.1 U
4-Chloroaniline	mg/kg	11	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Acenaphthene	mg/kg	45,000	0.0072 U	0.15 U	0.048 J	0.047	0.023	0.02 J	0.0076 U
Acenaphthylene	mg/kg	45,000	0.0009 J	0.021 J	0.45	0.0048 J	0.023	0.095 J	0.19
Acetophenone		120,000	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Anthracene Benz[a]anthracene	mg/kg	230,000	0.0016 J 0.0033 J	0.027 J	0.49 2.5	0.015	0.047 0.15	0.21 0.81	0.1 0.98
Benzaldehyde	mg/kg mg/kg		7.2 U	0.1 J 7.2 U	7.7 U	0.021 7.4 U	8.1 U	7.5 U	7.6 U
Benzo[a]pyrene	mg/kg	2.1	0.002 J	0.1 J	2.8	0.006 J	0.13	0.77	0.87
Benzo[b]fluoranthene	mg/kg	21	0.002 J 0.0051 J	0.22	4.7	0.026	0.13	1.4	2.7
Benzo[g,h,i]perylene	mg/kg	21	0.0031 U	0.069 J	1	0.007 J	0.073	0.23	0.95
Benzo[k]fluoranthene	mg/kg	210	0.0042 J	0.077 J	1.9	0.026	0.081	0.56	0.9
bis(2-Ethylhexyl)phthalate	mg/kg	160	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Caprolactam	mg/kg	400,000	18 U	18.1 U	19.2 U	18.5 U	20.1 U	18.7 U	18.9 U
Carbazole	mg/kg		7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Chrysene	mg/kg	2,100	0.0024 J	0.12 J	2.8	0.023	0.19	0.91	1.2
Dibenz[a,h]anthracene	mg/kg	2.1	0.0072 U	0.027 J	0.41	0.0075 U	0.027	0.083 J	0.33
Di-n-butylphthalate	mg/kg	82,000	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Di-n-ocytlphthalate	mg/kg	8,200	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Fluoranthene	mg/kg	30,000	0.0054 J	0.17	4.3	0.12	0.28	1.8	0.61
Fluorene	mg/kg	30,000	0.0011 J	0.021 J	0.1 J	0.031	0.039	0.054 J	0.014
Hexachloroethane	mg/kg	8	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.0072 U	0.06 J	1	0.0046 J	0.067	0.24	0.98
Isophorone	mg/kg	2,400	7.2 U	7.2 U	7.7 U	7.4 U	8.1 U	7.5 U	7.6 U
Naphthalene	mg/kg	17	0.0029 B	7.2.11	0.46	0.064	0.048	0.29	0.041
N-Nitrosodiphenylamine Phenanthrene	mg/kg	470	7.2 U 0.0043 J	7.2 U	7.7 U 1.6	7.4 U 0.2	8.1 U 0.17	7.5 U 0.76	7.6 U 0.15
Phenol	mg/kg	250,000	7.2 U	0.098 J 7.2 U	7.7 U	7.4 U	8.1 U		7.6 U
Pyrene	mg/kg mg/kg		0.0042 J	0.15	3.5	0.071	0.24	7.5 U 1.5	3.8
PCBs	mg/Kg	23,000	0.0042 J	0.13	J.3	0.0/1	U.44	1.3	3.0
Aroclor 1242	mg/kg	0.97	N/A	9.1 U	N/A	0.018 U	N/A	1.9 U	N/A
Aroclor 1248	mg/kg	0.97	N/A	9.1 U 9.1 U	N/A N/A	0.018 U	N/A	1.9 U	N/A
Aroclor 1248 Aroclor 1254	mg/kg	0.94	N/A	9.1 U	N/A	0.018 U	N/A	1.9 U	N/A
Aroclor 1260	mg/kg	0.97	N/A	23.7	N/A	0.018 U	N/A	1.9 0	N/A
Aroclor 1262	mg/kg	0.93	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Aroclor 1268	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	N/A
PCBs (total)	mg/kg	0.97	N/A	23.7 J	N/A	0.057 J	N/A	15.4	N/A
TPH/Oil and Grease	mg/Kg	0.77	1 1/2 1	20.7 9	11//11	0.037 0	17/11	10,4	1 1// 1
Diesel Range Organics	mg/kg	6,200	6.4 J	44.3	104	19.2	58.8	158	749
Gasoline Range Organics		6,200	6.1 U	11.1 U	11.6 U	9.4 U	9.5 U	11.4 U	11.6 U
Oil and Grease	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	N/A
	bb	~, ~ ~~	11/11	11/11	11/14	11/11	11/11	11/11	11/11

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

 $^{^{\}wedge}$ PAH compounds were analyzed via SIM

Parameter Units PAL B5-155-SB-1 B5-155-SB-5 B5-156-SB-1* B5-156-SB-6* B5-159-SB-1* Volatile Organic Compounds 1,1,1-Trichloroethane mg/kg 36,000 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,1-Dichloroethane mg/kg 16 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2,3-Trichlorobenzene mg/kg 930 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2,4-Trichlorobenzene mg/kg 110 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2-Dichlorobenzene mg/kg 9,300 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 2-Butanone (MEK) mg/kg 190,000 0.01 0.0087 U 0.011 U 0.012 U 0.01 U	0.004 U 0.004 U 0.004 U 0.004 U 0.004 U	0.0057 U 0.0057 U 0.0057 U
1,1,1-Trichloroethane mg/kg 36,000 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,1-Dichloroethane mg/kg 16 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2,3-Trichlorobenzene mg/kg 930 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2,4-Trichlorobenzene mg/kg 110 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2-Dichlorobenzene mg/kg 9,300 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.004 U 0.004 U 0.004 U	0.0057 U 0.0057 U
1,1-Dichloroethane mg/kg 16 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2,3-Trichlorobenzene mg/kg 930 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2,4-Trichlorobenzene mg/kg 110 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2-Dichlorobenzene mg/kg 9,300 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.004 U 0.004 U	0.0057 U
1,2,4-Trichlorobenzene mg/kg 110 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U 1,2-Dichlorobenzene mg/kg 9,300 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.004 U	
1,2-Dichlorobenzene mg/kg 9,300 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U		
		0.0057 U
2-Butanone (MEK) mg/kg 190,000 0.01 0.0087 U 0.011 U 0.012 U 0.01 U	0.004 U	0.0057 U
	0.008 U	0.011 U
2-Hexanone mg/kg 1,300 0.0082 U 0.0087 U 0.011 U 0.012 U 0.01 U	0.008 U	0.011 U
4-Methyl-2-pentanone (MIBK) mg/kg 56,000 0.0082 U 0.0087 U 0.011 U 0.012 U 0.01 U	0.008 U	0.011 U
Acetone mg/kg 670,000 0.062 0.0044 J 0.094 0.057 0.094	0.008 U	0.047 J
Benzene mg/kg 5.1 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.0033 J	0.0067	0.0057 U
Carbon tetrachloride mg/kg 2.9 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U Cyclohexane mg/kg 27,000 0.0082 U 0.0087 U 0.011 U 0.012 U 0.01 U	0.004 U 0.008 U	0.0057 U
Cyclohexane mg/kg 27,000 0.0082 U 0.0087 U 0.011 U 0.012 U 0.01 U Ethylbenzene mg/kg 25 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.008 U 0.004 U	0.011 U 0.0057 U
Methyl Acetate mg/kg 1,200,000 0.041 UJ 0.043 UJ 0.056 U 0.061 U 0.05 U	0.004 U	0.0037 U
Styrene mg/kg 35,000 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.004 U	0.037 U
Tetrachloroethene mg/kg 100 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.004 U	0.0057 U
Toluene mg/kg 47,000 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.0023 J	0.004 U	0.0057 U
Trichloroethene mg/kg 6 0.0041 U 0.0043 U 0.0056 U 0.0061 U 0.005 U	0.004 U	0.0057 U
Xylenes mg/kg 2,800 0.012 U 0.013 U 0.017 U 0.018 U 0.015 U	0.012 U	0.017 U
Semi-Volatile Organic Compounds^		
1,1-Biphenyl mg/kg 200 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
1,2,4,5-Tetrachlorobenzene mg/kg 350 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
2,4-Dimethylphenol mg/kg 16,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
2,4-Dinitrophenol mg/kg 1,600 18.6 U 19.3 U 18.3 U 18.5 U 18.4 U	17.7 U	18.7 U
2-Chloronaphthalene mg/kg 60,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
2-Methylnaphthalene mg/kg 3,000 0.08 0.0079 U 0.046 0.0077 0.067	0.0071 U	0.17
2-Methylphenol mg/kg 41,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
3&4-Methylphenol(m&p Cresol) mg/kg 41,000 14.9 U 15.4 U 14.6 U 14.8 U 14.7 U	14.1 U	14.9 U
4-Chloroaniline mg/kg 11 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 UJ
Acenaphthene mg/kg 45,000 0.021 0.0079 U 0.0058 J 0.002 J 0.015	0.0071 U	0.035
Acenaphthylene mg/kg 45,000 0.11 0.0079 U 0.061 0.0096 0.12	0.0071 U	0.035
Acetophenone mg/kg 120,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U Anthracene mg/kg 230,000 0.12 0.0079 U 0.05 0.015 0.18	7.1 U 0.0071 U	7.5 U 0.14
Benz[a]anthracene mg/kg 21 0.5 0.0079 U 0.39 0.079 0.8	0.0071 U	0.14
Benzaldehyde mg/kg 120,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Benzo[a]pyrene mg/kg 2.1 0.57 J 0.0011 J 0.36 0.077 1.2	0.00069 J	0.81 J
Benzo[b]fluoranthene mg/kg 21 1.3 J 0.0061 J 0.86 0.16 2.5	0.0018 J	2.1 J
Benzo[g,h,i]perylene mg/kg 0.18 J 0.0016 J 0.19 0.045 0.97	0.0071 U	0.25 J
Benzo[k]fluoranthene mg/kg 210 0.41 J 0.0062 J 0.27 0.057 0.85	0.0071 U	0.59 J
bis(2-Ethylhexyl)phthalate mg/kg 160 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Caprolactam mg/kg 400,000 18.6 U 19.3 U 18.3 U 18.5 U 18.4 U	17.7 U	18.7 U
Carbazole mg/kg 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Chrysene mg/kg 2,100 0.6 0.0019 J 0.41 0.085 0.93	0.00076 J	0.84
Dibenz[a,h]anthracene mg/kg 2.1 0.067 J 0.0079 U 0.084 0.021 0.33	0.0071 U	0.1 J
Di-n-butylphthalate mg/kg 82,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Di-n-ocytlphthalate mg/kg 8,200 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 UJ
Fluoranthene mg/kg 30,000 1 0.01 0.48 0.098 1.2	0.0011 J	1.3
Fluorene mg/kg 30,000 0.035 0.0079 U 0.0084 0.0025 J 0.027 Hexachloroethane mg/kg 8 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	0.0071 U 7.1 U	0.027 7.5 U
Hexachloroethane mg/kg 8 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U Indeno[1,2,3-c,d]pyrene mg/kg 21 0.17 J 0.0013 J 0.21 0.05 0.85	0.0071 U	0.28 J
Isophorone mg/kg 2,400 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Naphthalene mg/kg 17 0.19 0.0018 B 0.24 0.029 0.65	0.011	0.2
N-Nitrosodiphenylamine mg/kg 470 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Phenanthrene mg/kg 0.55 0.024 0.12 0.044 0.51	0.0022 J	0.72
Phenol mg/kg 250,000 7.4 U 7.7 U 7.3 U 7.4 U 7.4 U	7.1 U	7.5 U
Pyrene mg/kg 23,000 0.88 0.0022 J 0.47 0.086 1	0.00093 J	1.1
PCBs		
Aroclor 1242 mg/kg 0.97 9.2 U N/A 0.37 U N/A 9.1 U	N/A	0.093 U
Aroclor 1248 mg/kg 0.94 9.2 U N/A 0.37 U N/A 9.1 U	N/A	0.7
Aroclor 1254 mg/kg 0.97 9.2 U N/A 0.37 U N/A 9.1 U	N/A	1
Aroclor 1260 mg/kg 0.99 43.3 N/A 3 N/A 36.1	N/A	0.093 U
	N/A	N/A
Aroclor 1262 mg/kg N/A N/A N/A N/A N/A N/A		N/A
Aroclor 1262 mg/kg N/A N/A N/A N/A N/A Aroclor 1268 mg/kg N/A N/A N/A N/A N/A	N/A	
Aroclor 1262 mg/kg N/A 36.1 J	N/A N/A	1.7
Aroclor 1262 mg/kg N/A M/A N/A M/A N/A M/A M/A	N/A	1.7
Aroclor 1262 mg/kg N/A 36.1 J J TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 197 8.6 50.5 24.3 215	N/A 7.1 U	65.2
Aroclor 1262 mg/kg N/A 36.1 J TPH/Oil and Grease	N/A	1.7

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data

[^] PAH compounds were analyzed via SIM

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-029-SB-1*	B1-029-SB-5*	B1-030-SB-1*	B1-030-SB-5*	B1-031-SB-1*	B1-031-SB-5*	B1-032-SB-1*	B1-032-SB-5*	B1-049-SB-1	B1-049-SB-5
Metals												
Aluminum	mg/kg	1,100,000	4,300	14,400	9,100	18,400	18,700	14,300	14,000	15,200	30,500	77,100
Antimony	mg/kg	470	2.9 U	3.2 U	3 U	3.1 U	3.3 U	3.5 U	3.2 U	3.1 U	3.1 UJ	5 UJ
Arsenic	mg/kg	3	12.3	6.2	13	5.7	13.6	3.1	17.7	6.4	5.8	1.7 U
Barium	mg/kg	220,000	498	66.5	446	64.1	398	89.2	90.8	40.3	332	760
Beryllium	mg/kg	2,300	0.35 J	0.68 J	0.63 J	0.58 J	1.4	0.78 J	0.23 J	0.63 J	4.4	2.9
Cadmium	mg/kg	980	0.82 J	0.34 J	2.6	1.5 U	1.2 J	0.19 J	1.1 J	1.5 U	0.84 B	0.76 J
Chromium	mg/kg	120,000	299	26.9	488	25.7	722	23.7	7,490	43.9	69.8 J	854 J
Chromium VI	mg/kg	6.3	0.3 B	0.33 B	0.36 B	0.38 B	0.48 B	0.32 B	0.35 B	0.34 B	1.1 UJ	0.99 J
Cobalt	mg/kg	350	25.7	4.6 J	16.7	5 J	8.2	4.7 J	41.3	4.9 J	3.6 B	3.9 B
Copper	mg/kg	47,000	408	15.9	215	10.6	96.1	11.4	178	14.2	128 J	27.7 J
Iron	mg/kg	820,000	551,000	21,500	325,000	21,100	161,000	16,900	182,000	20,600	51,500	7,000
Lead	mg/kg	800	124	44.1	847	16.6	194	23.2	89.8	16.1	54.4 J	4.2 U
Manganese	mg/kg	26,000	5,170	331	9,110	284	27,100	618	16,700	596	4,560	3,620
Mercury	mg/kg	350	0.093 J	0.037 J	0.28	0.071 J	0.1 J	0.025 J	0.15	0.08 J	0.12 UJ	0.17 UJ
Nickel	mg/kg	22,000	240	11.5	135	13.9	50.7	10.7 J	3,710	12.1	23 J	31.8 J
Selenium	mg/kg	5,800	3.9 U	4.2 U	4 U	4.1 U	4.3 U	4.6 U	4.2 U	4.1 U	4.1 U	6.5 J
Silver	mg/kg	5,800	7	3.2 U	3.4	3.1 U	3.3 U	3.5 U	3.2 U	3.1 U	3.1 U	5 U
Vanadium	mg/kg	5,800	92.1	35.8	215	35.8	960	39.1	652	66.7	75.7 J	39.7 J
Zinc	mg/kg	350,000	475	109	715	49.4	394	95	1,900	70.7	118 J	13.8 J
Other												
Cyanide	mg/kg	150	1.3	0.051 B	4.4	0.076 J	0.54 J	0.26 J	1.2	0.079 J	0.38 J-	1.3 J-

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-050-SB-1	B1-050-SB-5	B1-051-SB-1	B1-051-SB-5	B1-052-SB-1	B1-052-SB-5	B1-053-SB-1*	B1-053-SB-7*	B1-054-SB-1*	B1-054-SB-5*
Metals												
Aluminum	mg/kg	1,100,000	31,600	38,000	21,400	20,700	27,500	28,100	20,100	18,300	15,300	14,600
Antimony	mg/kg	470	3.2 UJ	3.3 UJ	3.1 UJ	34 J	3 UJ	3.4 UJ	3 U	3.3 U	2.9 U	2.9 U
Arsenic	mg/kg	3	7.7	5.1	5.3	106	2.5 U	18	4	6.5	5.4	4
Barium	mg/kg	220,000	215 J	706 J	183	156	224	364	102	263	105	302
Beryllium	mg/kg	2,300	3.1	1.5	3.4	0.49 J	3.5	1.5	0.74 J	1.1 J	0.9 J	0.19 J
Cadmium	mg/kg	980	0.9 J	0.33 J	0.75 B	89	0.81 B	9.3	0.53 J	0.83 J	0.8 J	0.29 J
Chromium	mg/kg	120,000	211	164	176 J	1,720 J	579 J	314 J	999	433	975	1,810
Chromium VI	mg/kg	6.3	1.1 U	1.3 U	1.1 U	1.3 U	1.1 U	1.2 U	1.1 U	1.2 U	1.4	1.1 U
Cobalt	mg/kg	350	5.5	6.8	3.9 B	27.5	3.3 B	51.4	1.7 J	6.1	2.9 J	2.2 J
Copper	mg/kg	47,000	388	74.4	149 J	877 J	70.5 J	248 J	28.6	43.4	55.9	33.2
Iron	mg/kg	820,000	111,000	21,900	78,200	111,000	123,000	100,000	164,000	54,700	201,000	140,000
Lead	mg/kg	800	79.3	33.1	2,400 J	12,300 J	53.2 J	799 J	27.1	328	139	10
Manganese	mg/kg	26,000	11,200	1,320	5,170	5,820	15,400	6,270	20,100	19,200	20,000	46,300
Mercury	mg/kg	350	0.1 U	0.094 J	0.47 J-	0.037 J-	0.019 J-	0.036 J-	0.042 J	0.053 J	3.1	0.0042 J
Nickel	mg/kg	22,000	50.9 J	33.5 J	30.8 J	100 J	21.7 J	66.2 J	20	18.3	34.4	13.5
Selenium	mg/kg	5,800	4.3 U	4.4 U	4.1 U	4.5 U	4 U	4.6 U	4 U	4.5 U	3.9 U	3.8 U
Silver	mg/kg	5,800	3.2 U	3.3 U	3.1 U	27.6	3 U	2.5 J	0.84 J	3.3 U	1.7 J	2.9 U
Vanadium	mg/kg	5,800	172	21.8	133 J	2,590 J	356 J	559 J	555	1,180	547	9,910
Zinc	mg/kg	350,000	198 J	26.9 J	186 J	29,400 J	170 J	1,910 J	247	251	430	31.4
Other												
Cyanide	mg/kg	150	0.61 J-	4.2 J-	0.45 J-	13.8 J-	0.56 J-	3.8 J-	0.83	2.4	3.4	0.68

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-055-SB-1*	B1-055-SB-6.5*	B1-056-SB-1*	B1-056-SB-7.5*	B1-057-SB-1*	B1-057-SB-5*	B1-058-SB-1*	B1-058-SB-7.5*	B1-059-SB-1*
Metals											
Aluminum	mg/kg	1,100,000	23,900	17,600	39,400	16,100	12,600	38,300	9,880	13,500	3,400
Antimony	mg/kg	470	2.9 U	3.7 U	2.9 U	3.1 U	3.5 U	3.4 U	3.5 U	3.2 U	3.5 U
Arsenic	mg/kg	3	9.4	4.4	4.6	5.8	7.8	2.5 J	46.7	14.8	6.6
Barium	mg/kg	220,000	302	95.9	421	89.5	138	424	189	134	47.6
Beryllium	mg/kg	2,300	3	0.76 J	7.2	0.87 J	0.82 J	1.9	0.67 J	1.7	0.46 J
Cadmium	mg/kg	980	1.7 B	0.39 B	0.93 B	0.48 B	0.99 B	0.55 B	5.3	0.6 B	0.75 B
Chromium	mg/kg	120,000	582	53.2	18.5	37.4	243	132	360	78.1	88.6
Chromium VI	mg/kg	6.3	1.1 U	1.2 U	1.1 U	1.2 U	1.2 U	1.2 U	1.5	1.2 U	0.32 B
Cobalt	mg/kg	350	8	5.7 J	1 J	7.2	34	8	19.8	9.2	4.2 J
Copper	mg/kg	47,000	65.8	15	21.1	17.8	43.1	17.2	423	98.1	51.1
Iron	mg/kg	820,000	83,000	22,500	13,500	35,400	44,600	17,800	243,000	105,000	37,700
Lead	mg/kg	800	217	31	21.4	57.4	414	35.4	1,340	177	75.9
Manganese	mg/kg	26,000	17,800	1,120	2,680	1,000	1,850	1,890	7,130	1,880	1,760
Mercury	mg/kg	350	0.17	0.047 J	0.11 U	0.11 U	0.4	0.02 J	0.13	0.01 J	0.087 J
Nickel	mg/kg	22,000	54.7	12.6	2.8 J	17.2	226	37.1	199	59.1	19.4
Selenium	mg/kg	5,800	3.9 U	4.9 U	4.2	4.1 U	4.6 U	4.5 U	4.7 U	4.2 U	4.7 U
Silver	mg/kg	5,800	2.9 U	3.7 U	2.9 U	3.1 U	3.5 U	3.4 U	2.9 J	0.87 J	3.5 U
Vanadium	mg/kg	5,800	2,290	167	61	76.6	115	25.2	178	52.7	47.4
Zinc	mg/kg	350,000	474	70.8	107	115	373	48.7	521	121	257
Other											
Cyanide	mg/kg	150	2.3	0.31 B	3	0.26 B	1.2	0.63 J	1.8	4	1.7

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-059-SB-7*	B1-060-SB-1*	B1-060-SB-5*	B1-071-SB-1*	B1-071-SB-3*	B1-072-SB-1*	B1-072-SB-4*	B1-073-SB-1*	B1-074-SB-1*	B1-074-SB-4*
Metals												
Aluminum	mg/kg	1,100,000	17,000	7,940	9,020	21,200	28,100	17,800	34,800	7,050	28,300	17,600
Antimony	mg/kg	470	3.1 U	3.2 U	3 U	3.2 U	3 U	2.9 U	3.1 U	3.2 U	3.2 U	3 U
Arsenic	mg/kg	3	3.4	10.2	4.7	20.2	7	4.8	5.4	7.5	7.4	30.4
Barium	mg/kg	220,000	215	80.6	106	196	395	167	644	115	438	137
Beryllium	mg/kg	2,300	2.1	0.88 J	0.6 J	2.7	5.2	1.4	5.4	0.4 J	2.6	1.1
Cadmium	mg/kg	980	0.79 B	2.2 B	1.1 B	1.6	0.81 J	1.3 J	0.81 J	1.9 B	4.2	0.79 B
Chromium	mg/kg	120,000	25.4	92.3	85.4	6,330	140	722	84.3	241	212	164
Chromium VI	mg/kg	6.3	1.1 U	1.1 U	1.1 U	0.99 J	1.1 U	1.1 U	1.1 U	1.1 U	0.32 B	0.53 B
Cobalt	mg/kg	350	5.1 J	5.2 J	5.3	33	3.8 J	4 J	15.7	7.7	6.9	17.4
Copper	mg/kg	47,000	31.9	93.6	26.6	216	33.3	130	94.1	95.2	35.7	44.9
Iron	mg/kg	820,000	26,800	57,300	25,300	179,000	40,200	143,000	64,500	81,200	42,600	53,500
Lead	mg/kg	800	39.1	114	131	84	31.7	119	42.3	405	111	105
Manganese	mg/kg	26,000	1,940	2,030	3,200	9,900	3,190	14,300	6,100	4,940	8,840	6,510
Mercury	mg/kg	350	0.0039 J	0.075 J	0.17	0.074 J	0.11 U	0.043 J	0.11 U	0.45	0.11 U	0.0041 J
Nickel	mg/kg	22,000	9.3 J	26.1	24.8	3,240	12.1	66.6	11.4	53	32.6	23.9
Selenium	mg/kg	5,800	4.1 U	4.3 U	4 U	4.3 U	3 J	3.9 U	3.3 J	4.2 U	4.3 U	4.1 U
Silver	mg/kg	5,800	3.1 U	3.2 U	3 U	1.4 J	3 U	0.96 J	3.1 U	3.2 U	3.2 U	3 U
Vanadium	mg/kg	5,800	39.2	135	138	339	33	365	166	134	380	468
Zinc	mg/kg	350,000	114	283	269	890	147	430	154	649	4,670	209
Other												
Cyanide	mg/kg	150	0.15 J	4.3	3.1	1.3	0.32 B	0.8 B	0.33 B	2.1	1	1.6

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-087-SB-1*	B1-087-SB-4*	B1-088-SB-1*	B1-088-SB-5*	B1-093-SB-1*	B1-093-SB-5*	B1-094-SB-1*	B1-094-SB-7*	B1-097-SB-1*	B1-097-SB-5*
Metals												
Aluminum	mg/kg	1,100,000	27,000	12,900	25,400	6,690	10,600	23,900	46,300	38,600	11,600	29,700
Antimony	mg/kg	470	3.2 U	3.2 U	2.9 U	4.8	3.2 U	3.7 U	4.1 U	4.2 U	3.1 U	3.3 U
Arsenic	mg/kg	3	3.4	16	7.5	5.4	14.2	40	2.7 U	2.8 U	31.4	7
Barium	mg/kg	220,000	276	143	359	253	109	794	1,230	568	109	492
Beryllium	mg/kg	2,300	4.1	1.1 U	2.7	0.48 J	0.58 J	1.4	2.5	2.5	0.63 J	1.4
Cadmium	mg/kg	980	0.66 J	1.1 J	1.8	10.3	0.98 B	0.67 B	0.37 J	0.53 J	1.1 B	0.52 B
Chromium	mg/kg	120,000	510	2,950	403	132	74.1	337	55.1	47.2	735	1,070
Chromium VI	mg/kg	6.3	0.42 B	0.75 B	0.49 B	0.67 B	0.3 B	0.31 B	0.33 B	0.36 B	1.1 U	1.1 U
Cobalt	mg/kg	350	5.5	15.4	9.3	8.8	7.4	6.7	2 J	1.9 J	10.7	5.6
Copper	mg/kg	47,000	30.5	187	76.4	146	48.4	54.9	46.2	28.6	183	33.5
Iron	mg/kg	820,000	129,000	168,000	108,000	33,600	29,200	56,100	7,080	5,600	228,000	94,300
Lead	mg/kg	800	46.8	44.4	222	517	279	76.6	3.4 U	10	64.7	16.8
Manganese	mg/kg	26,000	13,500	48,500	15,900	2,660	1,480	19,600	1,140	984	14,500	35,400
Mercury	mg/kg	350	0.0062 J	0.0097 J	0.055 J	0.081 J	0.13	0.011 J	0.16 U	0.14 U	0.095 J	0.1 U
Nickel	mg/kg	22,000	34.9	47.4	23.9	28.1	20.9	28.1	8.7 J	5.2 J	105	20.4
Selenium	mg/kg	5,800	4.3 U	4.3 U	3.8 U	3.8 U	4.3 U	5 U	8.4	6.3	4.1 U	4.3 U
Silver	mg/kg	5,800	3.2 U	3.2 U	2.9 U	2.8 U	3.2 U	3.7 U	4.1 U	4.2 U	3.1 U	3.3 U
Vanadium	mg/kg	5,800	285	6,740	916	304	104	986	24.6	30.9	1,030	6,060
Zinc	mg/kg	350,000	178	431	514	678	385	133	2.6 J	30.2	164	35.8
Other												
Cyanide	mg/kg	150	0.61 J	0.37 J	1.1	0.68	0.8	1.6	3.1	3.4	0.39 B	1.6

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-097-SB-10	B1-098-SB-1*	B1-098-SB-5*	B1-107-SB-1*	B1-107-SB-5*	B1-108-SB-1*	B1-108-SB-4.5*	B1-109-SB-1*	B1-109-SB-4*	
Metals												
Aluminum	mg/kg	1,100,000	N/A	2,060	22,600	23,600	22,400	17,000	4,970	10,500	40,000	
Antimony	mg/kg	470	N/A	3 U	1.9 J	3.3 U	3.3 U	3.3 U	3.5 U	3.1 U	3.2 U	
Arsenic	mg/kg	3	4.5	18	7.4	6.4	7.9	7.4	82.3	17	4.2	
Barium	mg/kg	220,000	N/A	19.7	568	265	244	182	42.7	128	493	
Beryllium	mg/kg	2,300	N/A	1 U	1.1 U	3.5	4	2.4	0.57 J	1.3	5.3	
Cadmium	mg/kg	980	N/A	0.15 B	1.3 B	1.4 B	1.6 B	1.9 B	1.2 B	0.77 B	0.59 B	
Chromium	mg/kg	120,000	N/A	140	1,520	104	103	253	210	340	43.9	
Chromium VI	mg/kg	6.3	N/A	1.1 U	1.2 U	0.4 B	0.31 B					
Cobalt	mg/kg	350	N/A	20.6	7.9	11.7	12.7	12.4	48.3	15.7	5.6	
Copper	mg/kg	47,000	N/A	187	135	149	130	174	385	181	35.9	
Iron	mg/kg	820,000	N/A	406,000	71,800	175,000	178,000	198,000	456,000	355,000	51,900	
Lead	mg/kg	800	N/A	64.8	151	153	158	115	105	103	35.3	
Manganese	mg/kg	26,000	2,600	2,750	40,800	3,610	4,570	17,800	4,280	8,100	6,840	
Mercury	mg/kg	350	N/A	0.0092 J	0.037 J	0.0039 J	0.043 J	0.0039 J	0.035 J	0.021 J	0.11 U	
Nickel	mg/kg	22,000	N/A	282	29.2	59.2	77.6	114	938	102	19.8	
Selenium	mg/kg	5,800	N/A	4 U	4.4 U	4.4 U	4.3 U	4.3 U	4.6 U	4.2 U	3 J	
Silver	mg/kg	5,800	N/A	5.7	3.3 U	2 J	1.7 J	2 J	6.4	3.9	3.2 U	
Vanadium	mg/kg	5,800	59.9	15.4	9,140	72.6	114	283	27	156	76.9	
Zinc	mg/kg	350,000	N/A	44.8	204	350	333	337	174	237	60.4	
Other	Other											
Cyanide	mg/kg	150	N/A	1.2	0.54 J	0.4 B	0.65 J	0.38 B	0.21 B	0.83	0.51 B	

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-110-SB-1*	B1-110-SB-5*	B1-117-SB-1*	B1-117-SB-4.5*	B1-118-SB-1*	B1-118-SB-5*	B1-119-SB-1	B1-119-SB-5	B1-119-SB-10*	B1-121-SB-1
Metals												
Aluminum	mg/kg	1,100,000	9,590	13,400	21,200	15,500	8,970	10,700	8,540	7,550	N/A	15,700
Antimony	mg/kg	470	2.9 U	2.9 U	3 U	2.8 U	2.8 U	2.9 U	3.3 UJ	3.2 UJ	N/A	3 UJ
Arsenic	mg/kg	3	36.1	11.9	9	3.8	2.3 U	10.2	6.1	7.4	6.1	7.6
Barium	mg/kg	220,000	105	404	260	93	41.7	108	45.4 J	89.9 J	N/A	192
Beryllium	mg/kg	2,300	1.4	0.98 U	3.1	1.9	0.94 U	0.87 J	0.32 B	0.51 B	N/A	1.9
Cadmium	mg/kg	980	1.4 B	0.45 B	0.95 J	0.27 J	0.35 J	2.9	0.53 B	0.95 B	N/A	2
Chromium	mg/kg	120,000	232	2,080	210	549	1,100	459	1,060	1,130	N/A	208
Chromium VI	mg/kg	6.3	1.1 U	0.27 J	0.47 J	555	1.4	0.39 J	3.3	1.3 J-	N/A	1.1 UJ
Cobalt	mg/kg	350	21.6	6.6	2.8 J	1.7 J	0.7 J	13.7	4.4 B	3.3 J	N/A	5.8
Copper	mg/kg	47,000	198	44	47.4	19.9	21.6	102	45.6 J	68.6 J	N/A	303
Iron	mg/kg	820,000	373,000	118,000	67,200	132,000	191,000	216,000	242,000	245,000	N/A	88,500
Lead	mg/kg	800	139	24.5	709	5.9	5.9	232	36.5 J	61.3 J	N/A	192
Manganese	mg/kg	26,000	4,890	53,900	6,430	13,000	24,700	7,520	24,800	22,500	N/A	9,010
Mercury	mg/kg	350	0.028 J	0.03 J	0.021 J	0.015 J	0.018 J	0.29	0.39 J-	0.056 J-	N/A	0.021 J
Nickel	mg/kg	22,000	149	22.9	15.9	16.3	15.9	79.6	71.3 J	34.8 J	N/A	33.5
Selenium	mg/kg	5,800	3.8 U	3.9 U	4 U	3.8 U	3.8 U	3.8 U	4.4 U	4.2 U	N/A	4 U
Silver	mg/kg	5,800	4.9	2.9 U	3 U	1.2 J	1.8 J	2.7 J	1.2 B	2.3 B	N/A	0.77 B
Vanadium	mg/kg	5,800	74.3	11,700	145	352	773	192	834	536	N/A	182
Zinc	mg/kg	350,000	1,090	50.2	399	100	232	232	125 J	229 J	N/A	906
Other												
Cyanide	mg/kg	150	0.78	0.62	2.4	0.39 B	3.1	3.2	0.9 J-	0.99 J-	N/A	1.4 J-

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-122-SB-1	B1-123-SB-1	B1-124-SB-1	B1-125-SB-1	B1-135-SB-1*	B1-135-SB-5*	B1-136-SB-1	B1-136-SB-5	B1-137-SB-1*	B1-137-SB-5*
Metals												
Aluminum	mg/kg	1,100,000	11,700	13,900 J	16,500	11,700	13,300	12,400	13,400 J	2,490	11,900	78,100
Antimony	mg/kg	470	3.1 UJ	3 UJ	3 UJ	3.4 UJ	2.9 U	2.9 U	3.4 UJ	3.2 UJ	2.9 U	3.5 U
Arsenic	mg/kg	3	12.1	6.2	9.6	14.7	2.4 U	3.4	9.5	2.7 U	15.2	3.3
Barium	mg/kg	220,000	123	94.6 J	244	145	232	120	187 J	21.9	162	1,810
Beryllium	mg/kg	2,300	0.87 B	0.57 J	2.3	1.1 B	0.54 J	1.8	1.4	1.1 U	1.3	3.8
Cadmium	mg/kg	980	2.1	0.94 B	1.8	2	0.38 B	0.52 B	1.5 B	1.6 U	0.51 B	0.52 B
Chromium	mg/kg	120,000	315	844 J	187	355	949	72.2	79.3 J	6.9	143	1,130
Chromium VI	mg/kg	6.3	1.1 UJ	0.65 J-	1.2 UJ	1.1 UJ	13.8	0.26 B	1.1 UJ	1.2 U	0.31 B	0.33 B
Cobalt	mg/kg	350	8.3	5.1 J	7.6	16.7	1.7 J	3.3 J	12.7 J	1 J	22.6	14.1
Copper	mg/kg	47,000	131	69.9 J	126	172	34.1	30.5	79.3 J	2.9 J	123	38.6
Iron	mg/kg	820,000	131,000	177,000 J	91,300	188,000	166,000	58,100	174,000 J	7,110	280,000	18,300
Lead	mg/kg	800	360	174 J	253	350	7.2	18.5	90.1 J	4.6	352	4.1
Manganese	mg/kg	26,000	6,640	17,800 J	5,360	7,180	18,900	3,520	2,780 J	32.1	5,520	3,240
Mercury	mg/kg	350	0.96	0.29 J-	1.5	0.73	0.1 U	0.008 J	0.13 J-	0.0077 J	0.1 U	0.11 U
Nickel	mg/kg	22,000	95.7	55.9 J	40.6	102	19.7	15.1	77.7 J	1.8 J	68.5	97.7
Selenium	mg/kg	5,800	4.1 U	4 U	4 U	4.6 U	3.9 U	3.9 U	4.6 U	4.3 U	3.9 U	6.8
Silver	mg/kg	5,800	1.2 B	1.8 B	3 U	2.1 B	1 J	2.9 U	1.7 B	3.2 U	3.2	3.5 U
Vanadium	mg/kg	5,800	248	547 J	168	399	535	74.3	84.3 J	8.9	120	54.3
Zinc	mg/kg	350,000	1,080	471 J	1,140	1,120	99.4	97.2	257 J	9.7	163	3.3 J
Other												
Cyanide	mg/kg	150	3 J-	2.2 J-	1.7 J-	0.51 B	0.068 J	0.099 J	0.37 B	0.069 B	0.2 J	2.8

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-144-SB-1	B1-144-SB-5	B1-145-SB-1*	B1-145-SB-8.5*	B1-148-SB-1*	B1-156-SB-1*	B1-156-SB-7*	B1-158-SB-1*	B1-158-SB-4.5*	B1-175-SB-1*
Metals												
Aluminum	mg/kg	1,100,000	18,600	30,300	13,500	14,800	8,740	32,100	24,100	8,750	13,600	16,700
Antimony	mg/kg	470	3.3 UJ	3.5 UJ	3.3 U	2.9 U	2.9 U	3.2 U	3.1 U	3 U	3 U	3.3 U
Arsenic	mg/kg	3	17.6	16.4	2.7 U	4.7	5.5	5.7	4	2.7	5.3	15.5
Barium	mg/kg	220,000	205	430	119	86.6	38.1	462	694	66.3	48.2	567
Beryllium	mg/kg	2,300	2.1	3.1	0.58 J	0.6 J	0.96 U	4.2	1.4	0.21 J	1 U	1.6
Cadmium	mg/kg	980	2.8	2.7	2	0.66 J	0.54 B	1.9 B	1.2 B	0.17 B	0.31 B	13.4
Chromium	mg/kg	120,000	381 J	165 J	864	168	1,760	142	56.8	1,340	1,590	72.3
Chromium VI	mg/kg	6.3	1.1 U	1.1 U	0.9 B	0.27 B	16.4	0.49 B	0.58 B	3.9	24.3	0.27 B
Cobalt	mg/kg	350	15.2	19.6	3.3 J	9.3	4.8 U	6.3	8.5	5 U	2.5 J	28.6
Copper	mg/kg	47,000	178 J	156 J	68	25.2	19.4	288	52.6	16.4	19	296
Iron	mg/kg	820,000	126,000	62,900	193,000	44,600	157,000	94,500	42,700	182,000	132,000	96,100
Lead	mg/kg	800	624 J	634 J	99.4	53	2.4 U	409	204	3.2	2.9	1,360
Manganese	mg/kg	26,000	7,920	6,360	19,500	3,890	35,000	7,610	7,270	26,900	41,000	9,310
Mercury	mg/kg	350	0.04 J-	0.0034 J-	0.13	0.15	0.005 J	0.17	0.12 U	0.12 U	0.005 J	0.025 J
Nickel	mg/kg	22,000	75.8 J	112 J	27.6	16.9	16.3	45.3	22.7	9.9 J	21.3	103
Selenium	mg/kg	5,800	4.4 U	4.6 U	4.4 U	3.8 U	3.9 U	4.3 U	4.2 U	4 U	4 U	4.4 U
Silver	mg/kg	5,800	3.3 U	3.5 U	3.3 U	2.9 U	1.7 J	3.2 U	3.1 U	1.5 J	1.7 J	2.1 J
Vanadium	mg/kg	5,800	543 J	249 J	495	133	938	94.5	311	819	1,660	91
Zinc	mg/kg	350,000	777 J	674 J	1,230	344	15.3	463	302	17.8	18.7	5,310
Other												
Cyanide	mg/kg	150	0.51 J-	0.84 J-	0.75	1	0.58 U	2.4	1.2	0.28 J	0.66 U	4.8

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B1-175-SB-7.5*	B1-176-SB-1*	B1-176-SB-4*	B1-177-SB-1*	B1-177-SB-5*	B2-001-SB-1	B2-001-SB-5	B2-002-SB-1	B2-002-SB-4.5	B2-006-SB-1
Metals												
Aluminum	mg/kg	1,100,000	12,000	26,700	12,400	9,890	41,800	20,900	23,300	7,880	12,900	18,800
Antimony	mg/kg	470	3.6 U	3.3 U	3.4 U	1.9 J	36.2	2.9 UJ	2.5 UJ	2.6 UJ	3 UJ	2.5 UJ
Arsenic	mg/kg	3	23.4	9.4	13	47.3	54.2	2.4 U	9.8	4.3	3.2	8.9
Barium	mg/kg	220,000	445	466	347	254	399	34	260	77.6 J	53.6 J	174
Beryllium	mg/kg	2,300	1.3	3	1 J	0.59 J	2.1	0.95 U	3.1	0.62 J	0.75 J	2.8
Cadmium	mg/kg	980	12.6	2.7	3.7	1.4 J	0.61 J	1.4 U	1 J	0.42 J	1.5 U	1.7
Chromium	mg/kg	120,000	58.5	143	135	4,990	174	1,390	95.7	454	33.7	413
Chromium VI	mg/kg	6.3	0.33 B	0.35 B	0.5 B	0.56 B	0.32 B	5.6 J-	0.6 B	0.64 B	1.1 B	0.71 B
Cobalt	mg/kg	350	17.9	12	19.1	138	8.4	0.65 J	9.7	5.5	5.5	13
Copper	mg/kg	47,000	255	110	115	495	223	13.9	125	42.5 J	16.4 J	92.1
Iron	mg/kg	820,000	114,000	66,800	51,300	321,000	76,900	169,000	141,000	141,000	24,900	156,000
Lead	mg/kg	800	2,190	618	1,190	235	65.3	2.5	124	69.3	18	152
Manganese	mg/kg	26,000	7,280	6,190	3,610	5,500	2,000	37,400	4,060	13,700 J	285 J	10,700
Mercury	mg/kg	350	0.18	0.11 U	0.65	0.11 U	0.0063 J	0.11 U	0.049 J	0.12 U	0.019 J	0.061 J
Nickel	mg/kg	22,000	52.3	52.8	138	11,700	43.7	14.4 J	34.8 J	23.3	18.6	49.2 J
Selenium	mg/kg	5,800	4.8 U	4.4 U	4.6 U	3.9 U	5.3 U	3.8 U	3.4 U	3.5 U	4 U	3.3 U
Silver	mg/kg	5,800	2.4 J	3.3 U	3.4 U	3.1	4 U	29.1 J	9.3 J	28.3	1.4 J	18.4 J
Vanadium	mg/kg	5,800	81	327	348	235	71.7	662	97.9	1,180	29.9	707
Zinc	mg/kg	350,000	6,640	808	1,550	233	60.2	18	308	98.2	54.4	433
Other												
Cyanide	mg/kg	150	96.9	1.2	4.1	0.56 J	26.6	0.4 J	0.37 J	0.36 J+	1 U	1 J

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B2-006-SB-4	B2-041-SB-1*	B2-041-SB-5*	B2-042-SB-1	B2-042-SB-5	B2-063-SB-1*	B2-063-SB-5*	B2-068-SB-1*	B2-068-SB-5*	B23-013-SB-1*
Metals												
Aluminum	mg/kg	1,100,000	11,100	9,640	34,100	9,530	6,660	19,700	11,500	11,900	16,300	14,800
Antimony	mg/kg	470	2.9 UJ	2.6 U	2.9 U	2.4 UJ	2.4 UJ	2.6 U	2.9 U	2.6 U	2.7 U	2.7 U
Arsenic	mg/kg	3	8.9	5.1	9.6	4.3 J	22.1 J	4.6	29	2.2 U	6.6	11.7
Barium	mg/kg	220,000	125	80.9	334	36.5	74.5	273	184	48.3	153	488
Beryllium	mg/kg	2,300	1.7	0.14 J	1.8	0.11 B	0.96	2.6	1.5	0.87 U	2	1.7
Cadmium	mg/kg	980	0.77 J	0.52 J	1.1 J	1.2 U	15.8	1 J	2.5	1.3 U	0.63 J	0.48 J
Chromium	mg/kg	120,000	72.8	2,970	302	1,340	267	537	67.5	1,580	304	27.7
Chromium VI	mg/kg	6.3	0.61 B	0.67 B	1.1 B	5.4 J-	0.47 B	1.1 U	1.2 U	5.5	1.1 U	1.2 U
Cobalt	mg/kg	350	11.3	2.3 J	22.7	1.3 J	14.6	4.7	15.7	4.3 U	6.1	14
Copper	mg/kg	47,000	66	25.4	167	15.1	213	42.7	189	30.5	49.8	101
Iron	mg/kg	820,000	97,500	178,000	41,900	197,000	318,000	78,500	45,800	178,000	94,800	46,700
Lead	mg/kg	800	84.5	11.1	167	1.6 J	1,310	100	374	26.8	136	99.2
Manganese	mg/kg	26,000	1,730	33,500	1,710	35,800	5,230	12,900	1,380	29,500	7,480	12,800
Mercury	mg/kg	350	0.21	0.048 J	0.048 J	0.099 U	0.059 J	0.15	0.15	0.0093 J	0.16	0.11 J
Nickel	mg/kg	22,000	30.8 J	17.1	167	17.7 J	77.8 J	21.1	42.8	10.6	28	45.7
Selenium	mg/kg	5,800	3.9 U	3.4 U	2 J	3.2 U	3.3 U	3.5 U	3.8 U	3.5 U	3.6 U	3.6 U
Silver	mg/kg	5,800	6 J	20.6	11.2	26.7 J	13.2 J	2.6 U	2.9 U	2.6 U	2.7 U	2.7 U
Vanadium	mg/kg	5,800	88.2	576	86.5	623	244	612	79.3	827	199	165
Zinc	mg/kg	350,000	224	70	507	19.1	13,300	414	780	68.2	265	307
Other												
Cyanide	mg/kg	150	0.86 J	0.66 J	1.1	1 U	0.51 J	0.46 J	0.67 J	0.35 J	3.6	0.27 J

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B23-013-SB-5*	B23-029-SB-1.5*	B23-029-SB-5*	B5-007-SB-1	B5-008-SB-1	B5-009-SB-1*	B5-009-SB-5*	B5-010-SB-1*	B5-010-SB-7*
Metals											
Aluminum	mg/kg	1,100,000	62,400	7,610	10,500	13,700	39,000	25,500	20,400	7,150	44,600
Antimony	mg/kg	470	3.1 U	2.6 U	2.9 U	3.4 UJ	2.4 UJ	3.3 U	3.2 U	3.1 U	3.4 U
Arsenic	mg/kg	3	10.1	6.8	7.4	3.1	2 J	7.2	3.7	26.7	3.4
Barium	mg/kg	220,000	204	91.4	144	118	860	193	192	55.6	322
Beryllium	mg/kg	2,300	2.2	0.6 J	1.1	1.6	5.5	3.8	2.1	0.49 J	3.5
Cadmium	mg/kg	980	1.6 U	0.32 J	0.35 J	0.79 B	0.59 B	3.3	0.51 B	11.5	0.26 B
Chromium	mg/kg	120,000	173	28.1	21.2	360 J	25.2 J	150	29.1	329	5 B
Chromium VI	mg/kg	6.3	1.3 U	1.1 U	1.2 U	0.18 B	1.1 UJ	1.1 U	1.1 U	0.18 B	1.4 U
Cobalt	mg/kg	350	7.6	16	8.7	2.3 B	1.5 B	4.3 J	4.9 J	14.1	0.92 J
Copper	mg/kg	47,000	12.7	64	49.8	31.2	19.3	67.3	19.5	234	36.5
Iron	mg/kg	820,000	10,800	31,900	24,300	63,600 J	24,100 J	148,000	19,200	302,000	6,640
Lead	mg/kg	800	2.8	33.9	27.2	59.9	16.5	282	28.6	822	7.2
Manganese	mg/kg	26,000	1,290	389	524	8,330	8,180	5,160	3,500	6,780	1,780
Mercury	mg/kg	350	0.13 U	0.1 J	0.17	0.014 J	0.11 U	0.11 U	0.025 J	0.21	0.14 U
Nickel	mg/kg	22,000	53.2	44.7	23.1	14 J	5 J	39.5	10.7 J	113	1.8 J
Selenium	mg/kg	5,800	4.2 U	3.5 U	3.8 U	4.5 U	3.9	4.3 U	4.3 U	4.1 U	7.2
Silver	mg/kg	5,800	3.1 U	5	6.9	3.4 U	2.4 U	2.1 J	3.2 U	6.9	3.4 U
Vanadium	mg/kg	5,800	44.8	65.1	48.9	204	80.9	66.2	93.1	145	15.3
Zinc	mg/kg	350,000	1.1 B	54.6	47.8	363 J	125 J	2,140	75.1	15,600	24.7
Other											
Cyanide	mg/kg	150	1.7	0.46 J	5.4	0.88	0.12 J	0.5 J	1.7	6.8	7.5

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B5-010-SB-10*	B5-011-SB-1	B5-011-SB-5	B5-041-SB-1	B5-042-SB-1	B5-043-SB-1	B5-043-SB-5	B5-044-SB-1	B5-044-SB-5	B5-045-SB-1
Metals												
Aluminum	mg/kg	1,100,000	N/A	34,400	21,100	38,700	49,300	11,400	24,100	20,000	9,710	41,600
Antimony	mg/kg	470	N/A	3.1 UJ	2.5 UJ	2.4 UJ	2.5 UJ	2.6 UJ	3.3 UJ	3.1 UJ	3.4 UJ	2.7 UJ
Arsenic	mg/kg	3	5	4.8	4	2.9	2.1 U	2.2 U	4.2	10.2	2.9 U	2.5
Barium	mg/kg	220,000	N/A	478 J	289 J	632 J	1,110 J	169 J	71 J	291 J	78.6 J	499 J
Beryllium	mg/kg	2,300	N/A	3.2	2.2	5.4	6.8	1.2	0.53 J	2.3	0.37 J	4.2
Cadmium	mg/kg	980	N/A	1.1 B	0.61 B	1.9	0.8 B	0.8 B	1.6 U	3.5	1.7 U	1.4
Chromium	mg/kg	120,000	N/A	343 J	62.9 J	21.3	11.5	185	37.2	260	15.7	91.9
Chromium VI	mg/kg	6.3	N/A	0.43 J	0.18 J	1.1 UJ	1.1 UJ	0.27 J-	0.45 J-	0.23 J-	1.1 UJ	1.1 UJ
Cobalt	mg/kg	350	N/A	7.2	3.7 B	3.3 B	1.4 B	1.8 B	5.1 J	4.8 J	3.8 J	3.6 J
Copper	mg/kg	47,000	N/A	54.1	11.7	53.1	11.6	22.6	13	161	2.4 B	52.3
Iron	mg/kg	820,000	N/A	49,700	38,000	18,500 J	11,700 J	19,300 J	18,800 J	53,300 J	4,780 J	25,700 J
Lead	mg/kg	800	N/A	81.9	25.8	107	22.3	40.4	11.3	446	7.3	73.3
Manganese	mg/kg	26,000	N/A	12,800	5,880	5,300	7,280	5,940	567	7,920	307	9,130
Mercury	mg/kg	350	N/A	0.1 UJ	0.11 UJ	0.0049 J	0.1 U	0.017 J	0.046 J	0.11 U	0.023 J	0.11 U
Nickel	mg/kg	22,000	N/A	26	7.7 B	11.2	3.3 J	5.2 J	12.8	8.9 B	5.1 B	7.6 B
Selenium	mg/kg	5,800	N/A	3 B	3 B	1.9 J	4.4	3.5 U	4.3 U	2.7 B	4.6 U	2.8 B
Silver	mg/kg	5,800	N/A	3.1 U	2.5 U	2.4 U	2.5 U	2.6 U	3.3 U	3.1 U	3.4 U	2.7 U
Vanadium	mg/kg	5,800	N/A	1,540 J	137 J	110	54.5	913	122	512	49	397
Zinc	mg/kg	350,000	N/A	389	68.7	561	125	189	36.5	1,680	19.2	352
Other												
Cyanide	mg/kg	150	N/A	2.3 J-	0.27 J	4.1 J-	0.88 J-	0.48 J-	0.74 UJ	0.3 J-	0.12 J-	0.26 J-

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B5-045-SB-5	B5-058-SB-1	B5-058-SB-5	B5-059-SB-1	B5-068-SB-1*	B5-069-SB-1*	B5-069-SB-4*	B5-072-SB-1	B5-072-SB-6	B5-072-SB-10
Metals												
Aluminum	mg/kg	1,100,000	18,700	9,940	18,500	22,200	10,600	20,800	3,820	10,100	21,400	N/A
Antimony	mg/kg	470	2.4 UJ	3.8 J	2.5 UJ	6.5 J	1,680	4.4	5.2	3 UJ	3.7 UJ	N/A
Arsenic	mg/kg	3	6.7	6	3.6	4	25.8	14.4	28	7.7	7.5	8.1
Barium	mg/kg	220,000	370 J	29.7	71.7	206	229	450	96.1	121 J	16.8 J	N/A
Beryllium	mg/kg	2,300	1.3	0.45 J	0.49 J	3.9	1.5	2.6	0.37 J	1.2	1 J	N/A
Cadmium	mg/kg	980	0.32 B	3.6	1.2 U	0.97 B	1.2 J	5.4	1.3 B	0.63 B	1.9 U	N/A
Chromium	mg/kg	120,000	2,020	20.3 J	24.1 J	32.2 J	35.7	47.6	250	15.1	23	N/A
Chromium VI	mg/kg	6.3	0.47 J-	1.1 UJ	0.24 J-	0.26 B	1.2 U	1.1 U	1.1 U	1.1 UJ	1.1 J-	N/A
Cobalt	mg/kg	350	2 J	4.2 B	3.9 B	10.8	15.7	6.2	78.3	22.6	3.2 J	N/A
Copper	mg/kg	47,000	32.3	999	8.5	704	1,420	202	4,220	17.9	6.7	N/A
Iron	mg/kg	820,000	102,000 J	15,400 J	21,600 J	24,600 J	64,100	33,000	163,000	13,700 J	47,300 J	N/A
Lead	mg/kg	800	15.1	204	9.1	199	1,400	655	521	9.9	10.3	N/A
Manganese	mg/kg	26,000	44,400	123	76	971	762	2,990	1,040	6,850	40.3	N/A
Mercury	mg/kg	350	0.014 J	0.0052 J	0.012 J	0.019 J	0.088 J	0.0023 J	0.092 J	0.019 J	0.0025 J	N/A
Nickel	mg/kg	22,000	9.9	12.6 J	9.9 J	53 J	77.9	23.7	649	50.3	8.8 B	N/A
Selenium	mg/kg	5,800	3.2 U	2.5 B	3.3 U	3 U	4.4 U	3.5 U	3.8 U	4.1 U	5 U	N/A
Silver	mg/kg	5,800	2.4 U	2.8 U	2.5 U	2.2 U	3.3 U	2.6 U	2.9	3 U	3.7 U	N/A
Vanadium	mg/kg	5,800	11,600	20.6	33.8	10.7	26.6	71.5	23.8	28	35.3	N/A
Zinc	mg/kg	350,000	38.3	767 J	23.8 J	139 J	308	944	604	80.2	27.6	N/A
Other												
Cyanide	mg/kg	150	0.17 J-	0.63 U	0.73 U	0.63 U	0.17 J	0.69	0.65	0.17 J-	0.74 UJ	N/A

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B5-073-SB-1	B5-073-SB-5	B5-073-SB-10	B5-096-SB-1*	B5-096-SB-5*	B5-097-SB-1*	B5-097-SB-4*	B5-104-SB-1*	B5-104-SB-5*	B5-105-SB-1*
Metals												
Aluminum	mg/kg	1,100,000	13,300	13,800	N/A	15,800	18,200	28,400	27,700	8,870	18,100	10,100
Antimony	mg/kg	470	2.3 UJ	3.2 UJ	N/A	2.8 U	2.4 U	2.5 U	2.5 U	2.5 U	2.8 U	2.3 U
Arsenic	mg/kg	3	21.1	3.3	4.5	5.3	13.4	11.2	7	15.9	9	32.8
Barium	mg/kg	220,000	123 J	148 J	N/A	133	422	259	620	120	84.9	73.5
Beryllium	mg/kg	2,300	2	1.7	N/A	0.85 J	2.6	4.3	3.9	0.38 J	0.77 J	2
Cadmium	mg/kg	980	7.4	0.37 B	N/A	4.7	9.2	4.1	2.6	4	1.4 U	6.6
Chromium	mg/kg	120,000	271	35.6	N/A	217	124	112	32.4	846	30.2	250
Chromium VI	mg/kg	6.3	1.1 UJ	1.2 UJ	N/A	0.45 J	2.1	0.17 J	2.5	0.43 J	0.3 J	1.1 U
Cobalt	mg/kg	350	7.2	9.5	N/A	7	11.4	9.4	4.8	14.3	5.6	14.2
Copper	mg/kg	47,000	144	36.5	N/A	85.8	109	64.8	55.4	133	13.4	144
Iron	mg/kg	820,000	140,000 J	21,200 J	N/A	82,200	86,900	73,000	31,000	205,000	31,000	281,000
Lead	mg/kg	800	471	11.2	N/A	176	475	256	128	342	12.7	322
Manganese	mg/kg	26,000	6,100	447	N/A	6,070	4,220	4,010	3,510	29,200	118	2,080
Mercury	mg/kg	350	0.13	0.022 J	N/A	0.064 J	0.0036 J	0.022 J	0.11 U	0.0046 J	0.003 J	1.2
Nickel	mg/kg	22,000	36.9	18.1	N/A	54.2	36.8	23.7	7.7 J	56.2	14.5	78.9
Selenium	mg/kg	5,800	3.1 U	4.2 U	N/A	3.8 U	3.2 U	2 J	2.4 J	3.3 U	3.7 U	3 U
Silver	mg/kg	5,800	2.1 J	3.2 U	N/A	1.9 J	1.8 J	0.66 J	2.5 U	2.5 U	2.8 U	5.4
Vanadium	mg/kg	5,800	200	65.8	N/A	93.6	118	120	52.9	2,550	47.6	47.9
Zinc	mg/kg	350,000	3,200	60	N/A	3,500	2,880	1,520	801	639	38	8,350
Other												
Cyanide	mg/kg	150	0.43 J-	0.38 J-	N/A	0.46 J	0.057 J	1.2	0.077 J	0.54 J	0.75 U	5.2

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B5-105-SB-5*	B5-132-SB-1	B5-132-SB-4	B5-133-SB-1	B5-133-SB-5	B5-154-SB-1	B5-154-SB-4	B5-155-SB-1	B5-155-SB-5	B5-155-SB-10
Metals												
Aluminum	mg/kg	1,100,000	43,600	36,300	8,720	14,400	17,900	8,860	7,430	8,410	10,400	N/A
Antimony	mg/kg	470	2.7 U	2.6 UJ	2.2 UJ	21.1 J	3.7 UJ	2.6 UJ	2.4 UJ	2.6 UJ	2.4 UJ	N/A
Arsenic	mg/kg	3	2.2 U	4.6	17.3	33.8	2.2 J	15.1	20.1	13.6	6	5.4
Barium	mg/kg	220,000	393	403 J	179 J	129 J	60 J	112 J	96.1 J	137 J	26.6 J	N/A
Beryllium	mg/kg	2,300	6.9	5.9	0.7 J	1 B	0.8 B	0.67 J	0.51 J	0.7 J	0.48 J	N/A
Cadmium	mg/kg	980	0.46 B	0.91 B	7.4	10.5	0.24 B	4.3	5.5	20.3	0.14 B	N/A
Chromium	mg/kg	120,000	3.9 B	83.1	303	445 J	60.8 J	279	201	287	16.9	N/A
Chromium VI	mg/kg	6.3	1.1 U	0.17 J-	0.18 J-	0.4 J	0.34 J	0.5 J-	0.18 J	1.1 U	0.23 J	N/A
Cobalt	mg/kg	350	0.43 J	3.8 J	20.6	10.5	5.1 B	17.2	14.8	15.5	2.2 J	N/A
Copper	mg/kg	47,000	4.5 U	39.3	294	414	15.5	298	311	252	8.7	N/A
Iron	mg/kg	820,000	3,890	45,800 J	198,000 J	245,000	18,700	183,000 J	204,000 J	179,000 J	20,300 J	N/A
Lead	mg/kg	800	2.3	223	647	201	25.9	666	517	539	14.6	N/A
Manganese	mg/kg	26,000	1,730	3,890	8,300	14,200	345	7,780	2,820	5,520	196	N/A
Mercury	mg/kg	350	0.1 U	0.11 U	0.21	0.75 J-	0.053 J-	1.1	0.19	0.54	0.1 J	N/A
Nickel	mg/kg	22,000	9 U	15.3	65.2	115	12.6	77.3	69.4	88.8	4.9 B	N/A
Selenium	mg/kg	5,800	4.2	3.4 U	3 U	2.5 J	4.9 U	3.4 U	3.2 U	3.5 U	3.2 U	N/A
Silver	mg/kg	5,800	2.7 U	2.6 U	1 J	7.1	3.7 U	2.1 J	2.3 J	3.7	2.4 U	N/A
Vanadium	mg/kg	5,800	5.5	136	863	95.7 J	46.9 J	125	81.9	113	28	N/A
Zinc	mg/kg	350,000	44.5	226	1,340	2,430	71.8	1,270	3,780	2,670	26.3	N/A
Other												
Cyanide	mg/kg	150	0.18 J	7 J-	1.6 J-	0.061 J-	0.74 UJ	7.3 J-	1.6 J-	3 J-	0.71 UJ	N/A

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 2 - Sub-Parcel B1-2 Summary of Inorganics Detected in Soil

Parameter	Units	PAL	B5-156-SB-1*	B5-156-SB-6*	B5-156-SB-10	B5-159-SB-1*	B5-159-SB-5*	B5-162-SB-1
Metals								
Aluminum	mg/kg	1,100,000	14,100	31,000	N/A	9,640	9,300	14,700
Antimony	mg/kg	470	2.7 U	3 U	N/A	2.7 U	2.2 U	2.6 UJ
Arsenic	mg/kg	3	11.1	5.2	3.5	12.4	1.6 J	2.5
Barium	mg/kg	220,000	141	363	N/A	119	69.5	83.7
Beryllium	mg/kg	2,300	1.5	3.8	N/A	0.62 J	0.17 J	0.41 J
Cadmium	mg/kg	980	2.9	0.78 J	N/A	4.9	0.96 B	3.1
Chromium	mg/kg	120,000	170	142	N/A	597	1,850	982 J
Chromium VI	mg/kg	6.3	1.1 U	1.1 U	N/A	0.17 J	0.76 J	8.9 J-
Cobalt	mg/kg	350	7.3	11.8	N/A	16.2	0.47 J	4 B
Copper	mg/kg	47,000	74.6	39.1	N/A	204	41.6	92
Iron	mg/kg	820,000	92,100	53,400	N/A	192,000	220,000	152,000 J
Lead	mg/kg	800	404	49	N/A	1,720	8.8	505
Manganese	mg/kg	26,000	3,150	6,590	N/A	9,040	31,800	24,000
Mercury	mg/kg	350	5.7	0.1 U	N/A	5.6	0.11 U	0.092 J
Nickel	mg/kg	22,000	39	18.5	N/A	77.5	21.5	26.5 J
Selenium	mg/kg	5,800	3.6 U	3.3 J	N/A	3.6 U	2.9 U	3.5 U
Silver	mg/kg	5,800	2 J	3 U	N/A	2.9	3.4	3.3
Vanadium	mg/kg	5,800	78.7	645	N/A	231	595	553
Zinc	mg/kg	350,000	1,360	147	N/A	980	96.9	383 J
Other								
Cyanide	mg/kg	150	1.5	3.7	N/A	7.8	0.52 U	1.1

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J+: The positive result reported for this analyte is a quantitative estimate but may be biased high.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*} indicates non-validated data

Table 3 - Sub-Parcel B1-2 Summary of Organics Detected in Groundwater

Parameter	Units	PAL	B2-051-PZ*	B23-015-PZ*	FM01-PZM003	SW-058-MWS	SW-059-MWS	SW-060-MWS	SW-061-MWS	SW-066-MWS	SW-067-MWS	SW-068-MWS	SW-069-MWS	SW-070-MWS	SW08-PZM003	SW15-PZM005
Volatile Organic Compounds																
1,1,1-Trichloroethane	μg/L	200	1 U	1 U	1 U	1 U	1 U	1 U	4.1	1 U	1 U	1 U	1 U	1 U	1 U	1 U
1,1-Dichloroethane	μg/L	2.7	1 U	1 U	1 U	1 U	1 U	1 U	1.7	1 U	1 U	1 U	0.98 J	1 U	1 U	1 U
1,1-Dichloroethene	μg/L	7	1 U	1 U	1 U	1 U	1 U	1 U	0.39 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U
Acetone	μg/L	14,000	10 U	4.5 J	10 R	10 U	10 R	10 U	10 R	10 UJ	10 U	10 U	10 U	10 R	10 R	10 U
Benzene	μg/L	5	5 U	0.4 J	5 U	5 U	5 U	5 U	5 U	5 U	5 U	5 U	5 U	5 U	5 U	5 U
Chloroform	μg/L	0.22	1 U	6.8	27.9	31	1 U	1 U	1 U	2	1 U	1 U	1 U	1 U	1 U	1 U
Toluene	μg/L	1,000	0.84 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U
Semi-Volatile Organic Compounds^																
1,4-Dioxane	μg/L	0.46	0.025 J	2.1	0.1 U	0.1 U	0.19	0.12	0.49	0.1 U	0.1 U	0.07 J	0.79	0.052 J	0.16	0.1 U
2,4-Dimethylphenol	μg/L	360	0.52 J	0.99 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U
2-Methylnaphthalene	μg/L	36	0.55	0.57	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U
2-Methylphenol	μg/L	930	0.31 J	0.99 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U
3&4-Methylphenol(m&p Cresol)	μg/L	930	0.85 J	0.99 U	2.1 U	2 U	2 U	2 U	2 U	2 U	2 U	2 U	2 U	2 U	2 U	2 U
Acenaphthene	μg/L	530	0.49	0.11	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.033 J	0.1 U
Acenaphthylene	μg/L	530	0.42	0.2	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U
Anthracene	μg/L	1,800	0.27	0.062 J	0.014 J	0.1 U	0.049 J	0.053 J	0.046 J	0.016 J	0.1 U	0.1 U	0.026 J	0.1 U	0.023 J	0.1 U
Benz[a]anthracene	μg/L	0.03	0.056 J	0.099 U	0.022 J	0.037 J	0.1 U	0.023 J	0.1 U	0.032 J	0.1 U					
Benzo[a]pyrene	μg/L	0.2	0.1 U	0.099 U	0.014 J	0.021 J	0.1 U	0.029 J	0.1 U							
Benzo[b]fluoranthene	μg/L	0.25	0.1 U	0.099 U	0.1 U	0.095 J	0.1 U	0.11 J	0.1 U							
Benzo[g,h,i]perylene	μg/L		0.1 U	0.099 U	0.1 U	0.025 J	0.1 U	0.1 UJ	0.1 U							
Benzo[k]fluoranthene	μg/L	2.5	0.1 U	0.099 U	0.1 U	0.075 J	0.1 U	0.083 B	0.1 U							
bis(2-Ethylhexyl)phthalate	μg/L	6	1 U	0.42 J	1 U	1 U	1 U	0.26 B	1 U	1 U	0.25 B	1 U	1 U	1 U	1 U	1 U
Caprolactam	μg/L	9,900	2.6 U	0.24 J	2.6 UJ	2.5 U	0.51 J	2.5 U	2.5 U	2.5 U	2.5 U	2.5 U				
Carbazole	μg/L		1.6	0.99 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U
Chrysene	μg/L	25	0.1 U	0.099 U	0.012 J	0.046 J	0.1 U	0.013 J	0.1 U	0.028 B	0.1 U					
Diethylphthalate	μg/L	15,000	1 U	0.99 U	1 U	1 U	1 U	1 U	1 U	1 U	2.1	1 U	1 U	1 U	1 U	1 U
Fluoranthene	μg/L	800	0.45	0.1	0.059 J	0.039 J	0.1 U	0.1 U	0.011 J	0.1 U	0.1 U	0.1 U	0.019 J	0.1 U	0.014 J	0.1 U
Fluorene	μg/L	290	0.99	0.12	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.1 U	0.019 J	0.1 U
Naphthalene	μg/L	0.17	4.1 B	1	0.052 B	0.022 B	0.1 U	0.053 B	0.03 B	0.022 B	0.043 B	0.1 U	0.1 U	0.1 U	0.046 B	0.023 B
Pentachlorophenol	μg/L	1	2.6 U	2.5 U	2.6 U	2.5 U	2.5 U	0.95 J	2.5 U	2.5 U						
Phenanthrene	μg/L		1.8	0.13	0.056 J	0.1 U	0.02 J	0.1 U	0.018 J	0.1 U						
Phenol	μg/L	5,800	1 U	0.11 J	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U	1 U
Pyrene	μg/L	120	0.28	0.046 J	0.05 J	0.042 J	0.1 U	0.017 J	0.1 U	0.1 U	0.1 U					
TPH/Oil and Grease																
Diesel Range Organics	μg/L	47	198	1,250	47.9 B	105 UJ	152 J	239 J	114 J	188 J	103 J	122 J	270 J	48.8 J	80.9 J	101 UJ
Oil and Grease	μg/L	47	4,770 U	1,300 J	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Detections in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

[^]PAH compounds were analyzed via SIM

^{*} indicates non-validated data (data for B23-015-PZ is designated for validation prior to submission of the Phase II Investigation Report)

Table 4 - Sub-Parcel B1-2 Summary of Inorganics Detected in Groundwater

Parameter	Units	PAL	B2-051-PZ*	B23-015-PZ*	FM01-PZM003	SW-058-MWS	SW-059-MWS	SW-060-MWS	SW-061-MWS	SW-066-MWS	SW-067-MWS	SW-068-MWS	SW-069-MWS	SW-070-MWS	SW08-PZM003	SW15-PZM005
Total Metals																
Aluminum	μg/L	20,000	N/A	N/A	118	295	223	455	338	385	719	35.7 B	254	64.5	236	165
Arsenic	μg/L	10	N/A	N/A	5 U	5 U	5 U	5 U	5 U	4.3 J	5 U	5 U	2.8 B	5 U	3.7 J	5 U
Barium	μg/L	2,000	N/A	N/A	25.8	27.4	21.4	70.2	49.9	37.6	23.6	84.6	28.8	78.4	20.3	30.2
Beryllium	μg/L	4	N/A	N/A	1 U	1 U	1	1 U	1 U	1 U	1.8	1 U	1 U	1 U	1 U	1 U
Chromium	μg/L	100	N/A	N/A	1.6 B	8.6	22.8	4.2 B	4 B	6.5	5 U	1.4 J	1.4 J	2.3 B	1.5 J	0.89 B
Chromium VI	μg/L	0.035	N/A	N/A	10 U	10 U	11	10 U	5 J	10 U	N/A					
Cobalt	μg/L	6	N/A	N/A	5 U	5 U	61.5	5 U	5 U	5 U	16.7	5 U	5 U	5 U	5 U	4 J
Iron	μg/L	14,000	N/A	N/A	50 B	451	498	14.2 B	53.2 B	42.5 B	12,400	666	109	535	532	899
Manganese	μg/L	430	N/A	N/A	7.6	17.2	1,020	2.6 J	128	2 B	645	925	26.6	350	296	256
Nickel	μg/L	390	N/A	N/A	0.71 J	10 U	52.6	10 U	10 U	0.81 B	19.1	1.3 B	1.6 B	0.98 B	2.7 B	4.2 B
Vanadium	μg/L	86	N/A	N/A	224	21.4	41.6	7.2	3.5 B	27.9	5 U	5 U	53.5	0.77 J	1.4 B	5 U
Zinc	μg/L	6,000	N/A	N/A	10 U	8.2 J	64.4	6.7 J	0.65 B	0.65 J	68.2	1.8 B	1.1 B	2.1 B	11.2	7.5 B
Dissolved Metals																
Aluminum, Dissolved	μg/L	20,000	1,130	29.5 J	102	51.4	134	412	192	358	652	50 U	204	21.1 J	50 U	144
Arsenic, Dissolved	μg/L	10	5.1	5 U	5 U	5 U	5 U	5 U	5 U	5.6	3.5 B	5 U	5 B	5 U	3.3 B	5 U
Barium, Dissolved	μg/L	2,000	100	31.2	25.7	22.4	17.6	62.4	47.3	37.9	21.5	84.9	28.3	77.7	18.9	30.7
Beryllium, Dissolved	μg/L	4	1 U	1 U	1 U	1 U	0.84 J	1 U	1 U	1 U	1.7	1 U	1 U	1 U	1 U	1 U
Cadmium, Dissolved	μg/L	5	3 U	3 U	3 U	3 U	0.5 B	3 U	0.65 J	3 U	3 U	3 U	3 U	3 U	3 U	3 U
Chromium, Dissolved	μg/L	100	1 J	5 U	1.3 B	8.1	22.2	4.8 B	3.3 B	6	5 U	0.88 J	2 J	2.5 B	0.86 J	0.79 B
Cobalt, Dissolved	μg/L	6	5 U	5 U	5 U	5 U	49.6	5 U	5 U	5 U	15.8	5 U	5 U	5 U	5 U	4.5 B
Copper, Dissolved	μg/L	1,300	5 U	5 U	5 U	1.5 B	2 B	5 U	5 U	5 U	1.8 B	5 U	5 U	5 U	2.3 B	1.9 J
Iron, Dissolved	μg/L	14,000	121	18 J	23.9 J	19.4 B	310	70 U	70 U	12.3 B	11,400	630	28.2 J	217	69.5 J	957
Manganese, Dissolved	μg/L	430	5.6	15	5.8 J	2.9 B	827	2.4 B	123	5 U	625	934	19.8	321	278	273
Nickel, Dissolved	μg/L	390	10 U	10 U	10 U	10 U	45.2	10 U	10 U	10 U	19	1.4 B	2.4 B	0.93 B	3.4 B	3.6 B
Vanadium, Dissolved	μg/L	86	110	166	233	17.7	39.2	6.2	3.2 B	27.5	5 U	5 U	49.9	5 U	0.63 B	5 U
Zinc, Dissolved	μg/L	6,000	3.9 B	3.3 J	0.94 B	0.93 B	52	10 U	10 U	0.63 B	68.5	10 U	2.5 B	1.4 B	10 U	8 B
Other																
Cyanide	μg/L	200	16	11	10 U	10 U	10 U	10 U	10 U	11.2	10 U	10 U	8.2 J	10 U	10 U	10 U

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- J: The positive result reported for this analyte is a quantitative estimate.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this compound/analyte in the sample.

^{*} indicates non-validated data (data for B23-015-PZ is designated for validation prior to submission of the Phase II Investigation Report)

Table 5 - Sub-Parcel B1-2 COPC Screening Analysis (LOD)

Parameter	CAS#	Location of Max Result	Max Detection (mg/kg)	Final Flag	Min Detection (mg/kg)	Average Detection (mg/kg)	Total Samples	Frequency of Detection (%)	Cancer TR=1E-06 (mg/kg)	Non-Cancer HQ=0.1 (mg/kg)	сорс?
1,1,1-Trichloroethane	71-55-6	B5-045-SB-5	0.048		0.048	0.05	142	0.70		3,600	no
1,1-Biphenyl	92-52-4	B5-010-SB-1	3.1	J	0.015	0.18	156	30.13	410	20	no
1,1-Dichloroethane	75-34-3	B5-045-SB-5	0.0033	J	0.0033	0.003	142	0.70	16	23,000	no
1,2,3-Trichlorobenzene	87-61-6	B5-132-SB-4	0.0048	J	0.0029	0.004	142	1.41		93	no
1,2,4,5-Tetrachlorobenzene	95-94-3	B23-029-SB-5	0.073	J	0.019	0.04	156	1.92		35	no
1,2,4-Trichlorobenzene	120-82-1	B5-132-SB-1	0.0054	J	0.0048	0.005	142	1.41	110	26	no
1,2-Dichlorobenzene	95-50-1	B1-125-SB-1	0.0011	J	0.0011	0.001	142	0.70		930	no
2,4-Dimethylphenol	105-67-9	B1-177-SB-1	0.41		0.017	0.08	152	7.89		1,600	no
2,4-Dinitrophenol	51-28-5	B23-029-SB-1.5	0.071	J	0.071	0.07	151	0.66		160	no
2-Butanone (MEK)	78-93-3	B5-154-SB-4	0.02		0.0023	0.006	142	10.56		19,000	no
2-Chloronaphthalene	91-58-7	B1-059-SB-7	0.47		0.043	0.13	156	4.49		6,000	no
2-Hexanone	591-78-6	B5-154-SB-4	0.0066	J	0.0066	0.007	142	0.70		130	no
2-Methylnaphthalene	91-57-6	B5-010-SB-1	3.5		0.00098	0.19	157	89.17		300	no
2-Methylphenol	95-48-7	B1-177-SB-1	0.058	J	0.02	0.03	151	5.30		4,100	no
4-Chloroaniline	106-47-8	B1-125-SB-1	0.22	J	0.22	0.22	156	0.64	11	330	no
4-Methyl-2-pentanone (MIBK)	108-10-1	B1-031-SB-1	0.0073	J	0.0073	0.007	142	0.70		14,000	no
Acenaphthene	83-32-9	B5-010-SB-1	16.2		0.00057	0.28	157	76.43		4,500	no
Acenaphthylene	208-96-8	B5-010-SB-1	21.4		0.0009	0.25	157	87.26			no
Acetone	67-64-1	B5-096-SB-5	0.15		0.0044	0.03	140	58.57		67,000	no
Acetophenone	98-86-2	B23-013-SB-1	0.36	J	0.019	0.06	156	23.08		12,000	no
Aluminum	7429-90-5	B1-137-SB-5	78,100		2,060	19,274	156	100.00		110,000	no
Anthracene	120-12-7	B5-010-SB-1	30.7		0.0007	0.59	157	87.26		23,000	no
Antimony	7440-36-0	B5-068-SB-1	1,680		1.9	164	156	7.05		47	YES (NC)
Aroclor 1242	53469-21-9	B1-117-SB-1	0.205		0.0708	0.14	85	7.06	0.95		no
Aroclor 1248	12672-29-6	B5-162-SB-1	0.7		0.11	0.30	85	8.24	0.95		no
Aroclor 1254	11097-69-1	B1-030-SB-1	20.8		0.0577	1.22	85	35.29	0.97	1.5	YES (C/NC)
Aroclor 1260	11096-82-5	B5-155-SB-1	43.3		0.029	3.67	85	42.35	0.99		YES (C)
Arsenic	7440-38-2	B1-051-SB-5	106		1.6	11.7	163	91.41	3	48	YES (C/NC)
Barium	7440-39-3	B1-137-SB-5	1,810		16.8	251	156	100.00		22,000	no
Benz[a]anthracene	56-55-3	B5-010-SB-1	38.1		0.0021	1.04	157	93.63	21		YES (C)
Benzaldehyde	100-52-7	B23-013-SB-1	0.43	J	0.016	0.07	148	25.68	820	12,000	no
Benzene	71-43-2	B5-010-SB-7	0.13		0.0014	0.01	142	13.38	5.1	42	no
Benzo[a]pyrene	50-32-8	B5-010-SB-1	31.4		0.00069	0.99	157	96.82	2.1	22	YES (C/NC)
Benzo[b]fluoranthene	205-99-2	B5-010-SB-1	52.6		0.0015	1.92	157	99.36	21		YES (C)
Benzo[g,h,i]perylene	191-24-2	B5-010-SB-1	8		0.0013	0.42	157	96.18			no

Table 5 - Sub-Parcel B1-2 COPC Screening Analysis (LOD)

Parameter	CAS#	Location of Max Result	Max Detection (mg/kg)	Final Flag	Min Detection (mg/kg)	Average Detection (mg/kg)	Total Samples	Frequency of Detection (%)	Cancer TR=1E-06 (mg/kg)	Non-Cancer HQ=0.1 (mg/kg)	сорс?
Benzo[k]fluoranthene	207-08-9	B1-093-SB-1	36		0.00082	1.51	157	97.45	210		no
Beryllium	7440-41-7	B1-056-SB-1	7.2		0.14	1.91	156	89.10	6,900	230	no
bis(2-Ethylhexyl)phthalate	117-81-7	B1-125-SB-1	1.6	J	0.015	0.24	156	24.36	160	1,600	no
Cadmium	7440-43-9	B1-051-SB-5	89		0.19	4.26	156	52.56	9,300	98	no
Caprolactam	105-60-2	B2-001-SB-1	1.3		0.023	0.22	156	5.77		40,000	no
Carbazole	86-74-8	B5-010-SB-1	47.1		0.018	1.08	156	39.74			no
Carbon tetrachloride	56-23-5	B5-045-SB-5	0.0075		0.0075	0.008	142	0.70	2.9	57	no
Chromium	7440-47-3	B1-032-SB-1	7,490		6.9	527	156	98.72		180,000	no
Chromium VI	18540-29-9	B1-117-SB-4.5	555		0.17	15.4	156	27.56	6.3	350	YES (C/NC)
Chrysene	218-01-9	B5-010-SB-1	32		0.00076	1.01	157	98.73	2,100		no
Cobalt	7440-48-4	B1-177-SB-1	138		0.43	11.7	156	88.46	1,900	35	YES (NC)
Copper	7440-50-8	B5-069-SB-4	4,220		2.9	152	156	98.72		4,700	no
Cyanide	57-12-5	B1-175-SB-7.5	96.9		0.057	2.65	156	82.05		120	no
Cyclohexane	110-82-7	B5-045-SB-5	0.007	J	0.0059	0.006	142	1.41		2,700	no
Dibenz[a,h]anthracene	53-70-3	B5-010-SB-1	26.8		0.0012	0.38	157	82.17	2.1		YES (C)
Di-n-butylphthalate	84-74-2	B5-010-SB-1	7.7		0.019	1.36	156	3.85		8,200	no
Di-n-ocytlphthalate	117-84-0	B1-110-SB-1	0.88		0.028	0.27	156	2.56		820	no
Ethylbenzene	100-41-4	B5-010-SB-7	0.024		0.0018	0.008	142	4.23	25	2,000	no
Fluoranthene	206-44-0	B5-010-SB-1	116		0.00096	2.51	157	96.18		3,000	no
Fluorene	86-73-7	B5-010-SB-1	28.9		0.00086	0.36	157	83.44		3,000	no
Hexachloroethane	67-72-1	B2-001-SB-1	0.039	J	0.018	0.03	156	1.92	8	46	no
Indeno[1,2,3-c,d]pyrene	193-39-5	B5-010-SB-1	10.2		0.00096	0.45	157	93.63	21		no
Iron	7439-89-6	B1-029-SB-1	551,000		3,890	110,736	156	100.00		82,000	YES (NC)
Isophorone	78-59-1	B2-001-SB-1	0.1		0.1	0.10	156	0.64	2,400	16,000	no
Lead^	7439-92-1	B1-051-SB-5	12,300	J	1.6	324	156	98.08		800	YES (NC)
Manganese	7439-96-5	B1-110-SB-5	53,900		32.1	9,685	157	100.00		2,600	YES (NC)
Mercury	7439-97-6	B5-156-SB-1	5.7		0.0023	0.25	156	76.92		35	no
Methyl Acetate	79-20-9	B5-096-SB-1	0.02	J	0.02	0.02	132	0.76		120,000	no
Naphthalene	91-20-3	B5-010-SB-7	72.9		0.0016	0.88	158	81.65	17	59	YES (C/NC)
Nickel	7440-02-0	B1-177-SB-1	11,700		1.8	181	156	95.51	64,000	2,200	YES (NC)
N-Nitrosodiphenylamine	86-30-6	B2-001-SB-1	0.88		0.018	0.21	156	3.21	470	-	no
PCBs (total)*	1336-36-3	B5-155-SB-1	43.3	J	0.042	3.81	85	54.12	0.94		YES (C)
Phenanthrene	85-01-8	B5-010-SB-1	130		0.0013	2.05	157	92.99			no
Phenol	108-95-2	B1-177-SB-1	1.1		0.018	0.12	151	11.26		25,000	no
Pyrene	129-00-0	B5-010-SB-1	86.1		0.0009	2.12	157	96.82		2,300	no

Table 5 - Sub-Parcel B1-2 COPC Screening Analysis (LOD)

Parameter	CAS#	Location of Max Result	Max Detection (mg/kg)	Final Flag	Min Detection (mg/kg)	Average Detection (mg/kg)	Total Samples	Frequency of Detection (%)	Cancer TR=1E-06 (mg/kg)	Non-Cancer HQ=0.1 (mg/kg)	COPC?
Selenium	7782-49-2	B1-094-SB-1	8.4		1.9	4.18	156	11.54		580	no
Silver	7440-22-4	B2-001-SB-1	29.1	J	0.66	5.72	156	36.54		580	no
Styrene	100-42-5	B5-010-SB-7	0.015		0.015	0.02	142	0.70		3,500	no
Tetrachloroethene	127-18-4	B5-044-SB-1	0.014		0.0047	0.009	142	1.41	100	39	no
Toluene	108-88-3	B5-010-SB-7	0.27		0.0013	0.02	142	13.38		4,700	no
Trichloroethene	79-01-6	B5-043-SB-1	0.0021	J	0.0021	0.002	142	0.70	6	1.9	no
Vanadium	7440-62-2	B1-110-SB-5	11,700		5.5	655	157	100.00		580	YES (NC)
Xylenes	1330-20-7	B5-010-SB-7	0.6		0.013	0.14	142	3.52		250	no
Zinc	7440-66-6	B1-051-SB-5	29,400	J	2.6	998	156	99.36		35,000	no

J: The positive result reported for this analyte is a quantitative estimate

COPC = Constituent of Potential Concern C = Compound was identified as a cancer COPC

TR = Target Risk NC = Compound was identified as a non-cancer COPC

HQ = Hazard Quotient

^{*}PCBs (total) include the sum of all detected aroclor mixtures, including those without regional screening levels (e.g. Aroclor 1262, Aroclor 1268) which are not displayed.

[^]The COPC screening level for lead was not adjusted to the HQ=0.1 because lead is not assessed in the SLRA. The 800 mg/kg PAL is relevant to the Adult Lead Model procedure.

Table 6 - Sub-Parcel B1-2 Assessment of Lead

Exposure Unit	Surface/Sub-Surface	Arithmetic Mean (mg/kg)
EU1 ¹	Surface	188
	Sub-Surface	115
(60.8 ac.)	Pooled	155
EU1-EXP ²	Surface	173
	Sub-Surface	117
(61.2 ac.)	Pooled	147
EHO	Surface	424
EU2	Sub-Surface	616
(45.1 ac.)	Pooled	511

Adult Lead Model (ALM) Risk Levels								
Soil Concentration (mg/kg)	Probability of Blood Concentration of 10 ug/dL							
2,518 mg/kg	5%							
3,216 mg/kg	10%							

¹ Does not include area/locations along easements

² Includes area/locations along easements

Table 7 - Sub-Parcel B1-2 Soil Exposure Point Concentrations

			EU1 (60.8 ac.)								
			EPCs - Surface	Soils	EPCs - Sub-Surfa	ce Soils	EPCs - Pooled	Soils			
Parameter	Cancer COPC Screening Level (mg/kg)	Non-Cancer COPC Screening Level (mg/kg)	EPC Type EU1	EPC EU1 (mg/kg)	EPC Type EU1	EPC EU1 (mg/kg)	EPC Type EU1	EPC EU1 (mg/kg)			
Antimony		47.0	Maximum Value	1.90	Maximum Value	36.2	Maximum Value	36.2			
Arsenic	3.00	48.0	95% KM (Chebyshev) UCL	19.0	95% KM (Chebyshev) UCL	24.2	95% KM (BCA) UCL	14.3			
Chromium VI	6.30	350	95% KM (t) UCL	2.62	95% Adjusted Gamma KM-UCL	234	95% KM (Chebyshev) UCL	44.0			
Cobalt	1,900	35.0	95% KM (Chebyshev) UCL	27.8	95% Adjusted Gamma UCL	11.1	95% KM (BCA) UCL	14.9			
Iron		82,000	95% Student's-t UCL	188,198	95% Adjusted Gamma UCL	131,130	95% Approximate Gamma UCL	157,238			
Manganese		2,600	95% Adjusted Gamma UCL	15,729	95% Chebyshev (Mean, Sd) UCL	22,757	95% Chebyshev (Mean, Sd) UCL	18,249			
Nickel	64,000	2,200	95% Chebyshev (Mean, Sd) UCL	1,783	95% Chebyshev (Mean, Sd) UCL	183	95% Chebyshev (Mean, Sd) UCL	1,010			
Vanadium		580	95% Adjusted Gamma UCL	549	95% Chebyshev (Mean, Sd) UCL	3,672	95% H-UCL	1,109			
PCBs (total)	0.94		95% GROS Adjusted Gamma UCL	0.93	NA	NA	95% GROS Adjusted Gamma UCL	0.93			
Aroclor 1254	NE	1.50	97.5% KM (Chebyshev) UCL	1.09	NA	NA	97.5% KM (Chebyshev) UCL	1.09			
Benz[a]anthracene	21.0		95% Adjusted Gamma UCL	1.49	95% KM (Chebyshev) UCL	0.93	97.5% KM (Chebyshev) UCL	1.87			
Benzo[a]pyrene	2.10	22.0	95% KM (Chebyshev) UCL	2.79	95% KM (Chebyshev) UCL	0.93	95% KM (Chebyshev) UCL	1.76			
Benzo[b]fluoranthene	21.0		95% Adjusted Gamma UCL	3.83	95% Adjusted Gamma UCL	1.60	95% Adjusted Gamma UCL	2.40			
Dibenz[a,h]anthracene	2.10		95% KM (Chebyshev) UCL	0.41	95% KM (Chebyshev) UCL	0.17	95% KM (Chebyshev) UCL	0.27			
Naphthalene	17.0	59.0	99% KM (Chebyshev) UCL	0.77	97.5% KM (Chebyshev) UCL	0.26	97.5% KM (Chebyshev) UCL	0.36			

NE = Not Evaluated. Aroclor 1254 was included for non-cancer hazard only. The carcinogenic risk is evaluated with total PCBs.

NA = Not Applicable

Bold indicates EPC higher than lowest COPC SL

COPC = Constituent of Potential Concern

Table 7 - Sub-Parcel B1-2 Soil Exposure Point Concentrations

			EU1-EXP (61.2 ac.)								
			EPCs - Surface	Soils	EPCs - Sub-Surfa	ce Soils	EPCs - Pooled	Soils			
Parameter	Cancer COPC Screening Level (mg/kg)	Non-Cancer COPC Screening Level (mg/kg)	EPC Type EU1-EXP EU1-EXP (mg/kg)		EPC Type EU1-EXP	EPC EU1-EXP (mg/kg)	EPC Type EU1-EXP	EPC EU1-EXP (mg/kg)			
Antimony		47.0	Maximum Value	1.90	Maximum Value	36.2	Maximum Value	36.2			
Arsenic	3.00	48.0	95% KM (Chebyshev) UCL	17.5	95% KM (Chebyshev) UCL	22.6	95% KM (BCA) UCL	13.6			
Chromium VI	6.30	350	95% Adjusted Gamma KM-UCL	2.92	95% Adjusted Gamma KM-UCL	193	95% KM (Chebyshev) UCL	37.8			
Cobalt	1,900	35.0	95% KM (Chebyshev) UCL	25.4	95% Adjusted Gamma UCL	11.4	95% KM (BCA) UCL	14.1			
Iron		82,000	95% Chebsyhev (Mean, Sd) UCL	216,920	95% Adjusted Gamma UCL	117,413	95% Approximate Gamma UCL	146,525			
Manganese		2,600	95% Adjusted Gamma UCL	16,283	95% Chebyshev (Mean, Sd) UCL	19,886	95% Approximate Gamma UCL	14,083			
Nickel	64,000	2,200	95% Chebsyhev (Mean, Sd) UCL	1,551	95% Chebyshev (Mean, Sd) UCL	164	95% Chebyshev (Mean, Sd) UCL	871			
Vanadium		580	95% Adjusted Gamma UCL	546	95% Chebyshev (Mean, Sd) UCL	3,142	95% H-UCL	925			
PCBs (total)	0.94		95% Adjusted Gamma KM-UCL	0.82	NA	NA	95% Adjusted Gamma KM-UCL	0.82			
Aroclor 1254	NE	1.50	95% KM (BCA) UCL	0.49	NA	NA	95% KM (BCA) UCL	0.50			
Benz[a]anthracene	21.0		95% Adjusted Gamma UCL	1.36	95% KM (Chebyshev) UCL	0.83	95% KM (Chebyshev) UCL	1.37			
Benzo[a]pyrene	2.10	22.0	95% KM (Chebyshev) UCL	2.51	95% KM (Chebyshev) UCL	0.83	95% KM (Chebyshev) UCL	1.57			
Benzo[b]fluoranthene	21.0		95% Adjusted Gamma UCL	3.34	95% Adjusted Gamma UCL	1.42	95% Adjusted Gamma UCL	2.14			
Dibenz[a,h]anthracene	2.10		95% KM (Chebyshev) UCL	0.37	95% KM (Chebyshev) UCL	0.16	95% KM (Chebyshev) UCL	0.24			
Naphthalene	17.0	59.0	97.5% KM (Chebyshev) UCL	0.62	95% KM (Chebyshev) UCL	0.22	97.5% KM (Chebyshev) UCL	0.40			

NE = Not Evaluated. Aroclor 1254 was included for non-cancer hazard only. The carcinogenic risk is evaluated with total PCBs.

NA = Not Applicable

Bold indicates EPC higher than lowest COPC SL

COPC = Constituent of Potential Concern

Table 7 - Sub-Parcel B1-2 Soil Exposure Point Concentrations

			EU2 (45.1 ac.)									
			EPCs - Surface	Soils	EPCs - Sub-Surfa	ce Soils	EPCs - Pooled	Soils				
Parameter	Cancer COPC Screening Level (mg/kg)	Non-Cancer COPC Screening Level (mg/kg)	EPC Type EU2	EPC EU2 (mg/kg)	EPC Type EU2	EPC EU2 (mg/kg)	EPC Type EU2	EPC EU2 (mg/kg)				
Antimony		47.0	99% KM (Chebyshev) UCL	506	Maximum Value	34.0	97.5% KM (Chebyshev) UCL	178				
Arsenic	3.00	48.0	95% KM (Percentile Bootstrap) UCL	13.0	95% KM (Chebyshev) UCL	22.8	95% KM (BCA) UCL	13.5				
Chromium VI	6.30	350	95% KM (BCA) UCL	0.91	95% Adjusted Gamma KM-UCL	0.69	95% KM (% Bootstrap) UCL	0.71				
Cobalt	1,900	35.0	95% KM (Percentile Bootstrap) UCL	12.3	95% KM (Chebyshev) UCL	23.3	95% GROS Approx. Gamma UCL	14.0				
Iron		82,000	95% Adjusted Gamma UCL	155,598	95% H-UCL	110,293	95% Approximate Gamma UCL	114,920				
Manganese		2,600	95% Adjusted Gamma UCL	11,024	95% Adjusted Gamma UCL	10,239	95% Chebyshev (Mean, Sd) UCL	12,378				
Nickel	64,000	2,200	95% KM (Chebyshev) UCL	542	95% KM (Chebyshev) UCL	135	95% KM (Chebyshev) UCL	323				
Vanadium		580	95% H-UCL	563	95% Chebyshev (Mean, Sd) UCL	2,523	95% Chebyshev (Mean, Sd) UCL	1,346				
PCBs (total)	0.94		99% KM (Chebyshev) UCL	20.2	NA	NA	99% KM (Chebyshev) UCL	20.2				
Aroclor 1254	NE	1.50	95% KM (Chebyshev) UCL	3.00	NA	NA	95% KM (Chebyshev) UCL	3.00				
Benz[a]anthracene	21.0		95% Chebyshev (Mean, Sd) UCL	5.86	99% KM (Chebyshev) UCL	5.43	97.5% KM (Chebyshev) UCL	4.82				
Benzo[a]pyrene	2.10	22.0	95% Chebyshev (Mean, Sd) UCL	5.02	95% KM (Chebyshev) UCL	2.60	97.5% KM (Chebyshev) UCL	4.16				
Benzo[b]fluoranthene	21.0		95% Chebyshev (Mean, Sd) UCL	8.72	95% KM (Chebyshev) UCL	4.65	97.5% KM (Chebyshev) UCL	7.26				
Dibenz[a,h]anthracene	2.10		97.5% KM (Chebyshev) UCL	4.98	99% KM (Chebyshev) UCL	1.17	97.5% KM (Chebyshev) UCL	2.80				
Naphthalene	17.0	59.0	95% KM (Chebyshev) UCL	1.40	99% KM (Chebyshev) UCL	23.2	97.5% KM (Chebyshev) UCL	7.43				

NE = Not Evaluated. Aroclor 1254 was included for non-cancer hazard only. The carcinogenic risk is evaluated with total PCBs.

NA = Not Applicable

Bold indicates EPC higher than lowest COPC SL

COPC = Constituent of Potential Concern

Table 8 - Sub-Parcel B1-2 Surface Soils Composite Worker Risk Ratios

				EU1 (6	0.8 ac.)				EU2 (4:	5.1 ac.)	
			Composite Worker					Composite Worker			
			RSLs	(mg/kg)	Risk	Ratios		RSLs (mg/kg)		Risk Ratios	
Parameter	Target Organs	EPC	Cancer	Non-Cancer	Risk	HQ	EPC	Cancer	Non-Cancer	Risk	HQ
		(mg/kg)					(mg/kg)				
Antimony	Hematologic	1.90		470		0.004	506		470		1
Arsenic	Cardiovascular; Dermal	19.0	3.00	480	6.3E-06	0.04	13.0	3.00	480	4.3E-06	0.03
Chromium VI	Respiratory	2.62	6.30	3,500	4.2E-07	0.0007	0.91	6.30	3,500	1.4E-07	0.0003
Cobalt	Thyroid	27.8	1,900	350	1.5E-08	0.08	12.3	1,900	350	6.5E-09	0.04
Iron	Gastrointestinal	188,198		820,000		0.2	155,598		820,000		0.2
Manganese	Nervous	15,729		26,000		0.6	11,024		26,000		0.4
Nickel	Body Weight	1,783	64,000	22,000	2.8E-08	0.08	542	64,000	22,000	8.5E-09	0.02
Vanadium	Dermal	549		5,800		0.09	563		5,800		0.1
PCBs (total)		0.93	0.94		9.9E-07		20.2	0.94		2.1E-05	
Aroclor 1254	Dermal; Immune; Ocular	1.09	NE	15.0		0.07	3.00	NE	15.0		0.2
Benz(a)anthracene		1.49	21.0		7.1E-08		5.86	21.0		2.8E-07	
Benzo(a)pyrene	Developmental	2.79	2.10	220	1.3E-06	0.01	5.02	2.10	220	2.4E-06	0.02
Benzo(b)fluoranthene		3.83	21.0		1.8E-07		8.72	21.0		4.2E-07	
Dibenz(a,h)anthracene		0.41	2.10		2.0E-07		4.98	2.10		2.4E-06	
Naphthalene	Nervous; Respiratory	0.77	17.0	590	4.5E-08	0.001	1.40	17.0	590	8.2E-08	0.002
					1E-05	\				3E-05	\

Bold indicates maximum value used

NE = Not Evaluated

RSLs were obtained from the EPA Regional Screening Levels at https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search

	Hematologic	0
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	1
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

	Hematologic	1
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	0
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

Table 9 - Sub-Parcel B1-2 Sub-Surface Soils Composite Worker Risk Ratios

			EU1 (60.8 ac.)						EU2 (45.1 ac.)			
			Composite Worker				Composite Worker					
			RSLs	(mg/kg)	Risk	Ratios		RSLs	(mg/kg)	Risk 1	Ratios	
Parameter	Target Organs	EPC (mg/kg)	Cancer	Non-Cancer	Risk	HQ	EPC (mg/kg)	Cancer	Non-Cancer	Risk	HQ	
Antimony	Hematologic	36.2		470		0.08	34.0		470		0.07	
Arsenic	Cardiovascular; Dermal	24.2	3.00	480	8.1E-06	0.05	22.8	3.00	480	7.6E-06	0.05	
Chromium VI	Respiratory	234	6.30	3,500	3.7E-05	0.07	0.69	6.30	3,500	1.1E-07	0.0002	
Cobalt	Thyroid	11.1	1,900	350	5.8E-09	0.03	23.3	1,900	350	1.2E-08	0.07	
Iron	Gastrointestinal	131,130		820,000		0.2	110,293		820,000		0.1	
Manganese	Nervous	22,757		26,000		0.9	10,239		26,000		0.4	
Nickel	Body Weight	183	64,000	22,000	2.9E-09	0.008	135	64,000	22,000	2.1E-09	0.006	
Vanadium	Dermal	3,672		5,800		0.6	2,523		5,800		0.4	
Benz(a)anthracene		0.93	21.0		4.4E-08		5.43	21.0		2.6E-07		
Benzo(a)pyrene	Developmental	0.93	2.10	220	4.4E-07	0.004	2.60	2.10	220	1.2E-06	0.01	
Benzo(b)fluoranthene		1.60	21.0		7.6E-08		4.65	21.0		2.2E-07		
Dibenz(a,h)anthracene		0.17	2.10		8.1E-08		1.17	2.10		5.6E-07		
Naphthalene	Nervous; Respiratory	0.26	17.0	590	1.5E-08	0.0004	23.2	17.0	590	1.4E-06	0.04	
					5E-05	\				1E-05	\	

Bold indicates maximum value used

RSLs were obtained from the EPA Regional Screening Levels at https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search

	Hematologic	0
	Cardiovascular	0
	Dermal	1
	Respiratory	0
Total HI	Thyroid	0
	Gastrointestinal	0
	Nervous	1
	Developmental	0
	Body Weight	0

	Hematologic	0
	Cardiovascular	0
	Dermal	0
	Respiratory	0
Total HI	Thyroid	0
	Gastrointestinal	0
	Nervous	0
	Developmental	0
	Body Weight	0

Table 10 - Sub-Parcel B1-2 Pooled Soils Composite Worker Risk Ratios

				EU1 (6	0.8 ac.)				EU2 (4:	5.1 ac.)	
				Composit				Composite Worker			
			RSLs	(mg/kg)	Risk	Ratios]	RSLs	(mg/kg)	Risk Ratios	
Parameter	Target Organs	EPC	Cancer	Non-Cancer	Risk	HQ	EPC	Cancer	Non-Cancer	Risk	HQ
		(mg/kg)					(mg/kg)				
Antimony	Hematologic	36.2		470		0.08	178		470		0.4
Arsenic	Cardiovascular; Dermal	14.3	3.00	480	4.8E-06	0.03	13.5	3.00	480	4.5E-06	0.03
Chromium VI	Respiratory	44.0	6.30	3,500	7.0E-06	0.01	0.71	6.30	3,500	1.1E-07	0.0002
Cobalt	Thyroid	14.9	1,900	350	7.8E-09	0.04	14.0	1,900	350	7.4E-09	0.04
Iron	Gastrointestinal	157,238		820,000		0.2	114,920		820,000		0.1
Manganese	Nervous	18,249		26,000		0.7	12,378		26,000		0.5
Nickel	Body Weight	1,010	64,000	22,000	1.6E-08	0.05	323	64,000	22,000	5.0E-09	0.01
Vanadium	Dermal	1,109		5,800		0.2	1,346		5,800		0.2
PCBs (total)		0.93	0.94		9.9E-07		20.2	0.94		2.1E-05	
Aroclor 1254	Dermal; Immune; Ocular	1.09	NE	15.0		0.07	3.00	NE	15.0		0.2
Benz(a)anthracene		1.87	21.0		8.9E-08		4.82	21.0		2.3E-07	
Benzo(a)pyrene	Developmental	1.76	2.10	220	8.4E-07	0.008	4.16	2.10	220	2.0E-06	0.02
Benzo(b)fluoranthene		2.40	21.0		1.1E-07		7.26	21.0		3.5E-07	
Dibenz(a,h)anthracene		0.27	2.10		1.3E-07		2.80	2.10		1.3E-06	
Naphthalene	Nervous; Respiratory	0.36	17.0	590	2.1E-08	0.0006	7.43	17.0	590	4.4E-07	0.01
					1E-05	\				3E-05	\

Bold indicates maximum value used

NE = Not Evaluated

RSLs were obtained from the EPA Regional Screening Levels at https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search

	Hematologic	0
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	1
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

	Hematologic	0
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	0
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

Table 11 - Sub-Parcel B1-2 Surface Soils Construction Worker Risk Ratios

			80 I	Day - EU1	-EXP (61.2	ac.)		85 Day - EU2 (45.1 ac.)					
			Construction Worker					Construction Worker					
			SSLs	(mg/kg)	Risk Ratios			SSLs	(mg/kg)	Risk R	atios		
Parameter	Target Organs	EPC (mg/kg)	Cancer	Non-Cancer	Risk	HQ	EPC (mg/kg)	Cancer	Non-Cancer	Risk	HQ		
Antimony	Hematologic	1.90		369		0.005	506		347		1		
Arsenic	Cardiovascular; Dermal	17.5	47.3	302	3.7E-07	0.06	13.0	44.5	284	2.9E-07	0.05		
Chromium VI	Respiratory	2.92	68.0	2,505	4.3E-08	0.001	0.91	63.6	2,356	1.4E-08	0.0004		
Cobalt	Thyroid	25.4	18,387	3,016	1.4E-09	0.008	12.3	15,082	2,812	8.2E-10	0.004		
Iron	Gastrointestinal	216,920		751,692		0.3	155,598		707,475		0.2		
Manganese	Nervous	16,283		13,444		1	11,024		12,444		0.9		
Nickel	Body Weight	1,551	636,470	12,312	2.4E-09	0.1	542	522,066	11,543	1.0E-09	0.05		
Vanadium	Dermal	546		5,026		0.1	563		4,716		0.1		
PCBs (total)		0.82	12.8		6.4E-08		20.2	12.5		1.6E-06			
Aroclor 1254	Dermal; Immune; Ocular	0.49	NE	23.4		0.02	3.00	NE	22.0		0.1		
Benz(a)anthracene		1.36	431		3.2E-09		5.86	412		1.4E-08			
Benzo(a)pyrene	Developmental	2.51	52.8	16.2	4.8E-08	0.2	5.02	49.9	16.3	1.0E-07	0.3		
Benzo(b)fluoranthene		3.34	525		6.4E-09		8.72	496		1.8E-08			
Dibenz(a,h)anthracene		0.37	55.7		6.6E-09		4.98	52.4		9.5E-08			
Naphthalene	Nervous; Respiratory	0.62	34.6	50.5	1.8E-08	0.01	1.40	35.1	51.2	4.0E-08	0.03		
					6E-07	\				2E-06	↓		

Bold indicates maximum value

NE = Not Evaluated

SSLs calculated using equations in the EPA Supplemental Guidance dated 2002 <u>Guidance Equation Input Assumptions:</u>

5 cars/day (2 tons/car)

5 trucks/day (20 tons/truck)

3 meter source depth thickness

	Hematologic	0
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	1
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

	Hematologic	1
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	1
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

Table 12 - Sub-Parcel B1-2 Sub-Surface Soils Construction Worker Risk Ratios

			80 1	Day - EU1	-EXP (61.2	ac.)		85 Day - EU2 (45.1 ac.)				
				Construct	tion Worker			Construction Worker				
			SSLs	(mg/kg)	Risk R	atios		SSLs	(mg/kg)	Risk R	Ratios	
Parameter	Target Organs	EPC	Cancer	Non-Cancer	Risk	HQ	EPC	Cancer	Non-Cancer	Risk	HQ	
	Homotologia	(mg/kg)		2.50		0.1	(mg/kg)		2.47		0.1	
Antimony	Hematologic	36.2		369		0.1	34.0		347		0.1	
Arsenic	Cardiovascular; Dermal	22.6	47.3	302	4.8E-07	0.07	22.8	44.5	284	5.1E-07	0.08	
Chromium VI	Respiratory	193	68.0	2,505	2.8E-06	0.08	0.69	63.6	2,356	1.1E-08	0.0003	
Cobalt	Thyroid	11.4	18,387	3,016	6.2E-10	0.004	23.3	15,082	2,812	1.5E-09	0.008	
Iron	Gastrointestinal	117,413		751,692		0.2	110,293		707,475		0.2	
Manganese	Nervous	19,886		13,444		1	10,239		12,444		0.8	
Nickel	Body Weight	164	636,470	12,312	2.6E-10	0.01	135	522,066	11,543	2.6E-10	0.01	
Vanadium	Dermal	3,142		5,026		0.6	2,523		4,716		0.5	
Benz(a)anthracene		0.83	431		1.9E-09		5.43	412		1.3E-08		
Benzo(a)pyrene	Developmental	0.83	52.8	16.2	1.6E-08	0.05	2.60	49.9	16.3	5.2E-08	0.2	
Benzo(b)fluoranthene		1.42	525		2.7E-09		4.65	496		9.4E-09		
Dibenz(a,h)anthracene		0.16	55.7		2.9E-09		1.17	52.4		2.2E-08		
Naphthalene	Nervous; Respiratory	0.22	34.6	50.5	6.4E-09	0.004	23.2	35.1	51.2	6.6E-07	0.5	
					3E-06	V				1E-06	V	

Bold indicates maximum value

SSLs calculated using equations in the EPA Supplemental Guidance dated 2002 Guidance Equation Input Assumptions:

5 cars/day (2 tons/car)

5 trucks/day (20 tons/truck)

3 meter source depth thickness

	Hematologic	0
	Cardiovascular	0
	Dermal	1
	Respiratory	0
Total HI	Thyroid	0
	Gastrointestinal	0
	Nervous	1
	Developmental	0
	Body Weight	0

	Hematologic	0
	Cardiovascular	0
	Dermal	1
	Respiratory	0
Total HI	Thyroid	0
	Gastrointestinal	0
	Nervous	1
	Developmental	0
	Body Weight	0

Table 13 - Sub-Parcel B1-2 Pooled Soils Construction Worker Risk Ratios

			80 1	Day - EU1	-EXP (61.2	2 ac.)		85 Day - EU2 (45.1 ac.)					
				Construct	tion Worker			Construction Worker					
			SSLs	(mg/kg)	Risk F	Ratios]	SSLs	(mg/kg)	Risk Ratios			
Parameter	Target Organs	EPC (mg/kg)	Cancer	Non-Cancer	Risk	HQ	EPC (mg/kg)	Cancer	Non-Cancer	Risk	HQ		
Antimony	Hematologic	36.2		369		0.1	178		347		0.5		
Arsenic	Cardiovascular; Dermal	13.6	47.3	302	2.9E-07	0.05	13.5	44.5	284	3.0E-07	0.05		
Chromium VI	Respiratory	37.8	68.0	2,505	5.6E-07	0.02	0.71	63.6	2,356	1.1E-08	0.0003		
Cobalt	Thyroid	14.1	18,387	3,016	7.7E-10	0.005	14.0	15,082	2,812	9.3E-10	0.005		
Iron	Gastrointestinal	146,525		751,692		0.2	114,920		707,475		0.2		
Manganese	Nervous	14,083		13,444		1	12,378		12,444		1		
Nickel	Body Weight	871	636,470	12,312	1.4E-09	0.07	323	522,066	11,543	6.2E-10	0.03		
Vanadium	Dermal	925		5,026		0.2	1,346		4,716		0.3		
PCBs (total)		0.82	12.8		6.4E-08		20.2	12.5		1.6E-06			
Aroclor 1254	Dermal; Immune; Ocular	0.50	NE	23.4		0.02	3.00	NE	22.0		0.1		
Benz(a)anthracene		1.37	431		3.2E-09		4.82	412		1.2E-08			
Benzo(a)pyrene	Developmental	1.57	52.8	16.2	3.0E-08	0.1	4.16	49.9	16.3	8.3E-08	0.3		
Benzo(b)fluoranthene		2.14	525		4.1E-09		7.26	496		1.5E-08			
Dibenz(a,h)anthracene		0.24	55.7		4.3E-09		2.80	52.4		5.3E-08			
Naphthalene	Nervous; Respiratory	0.40	34.6	50.5	1.2E-08	0.008	7.43	35.1	51.2	2.1E-07	0.1		
					1E-06	\				2E-06	₩		

Bold indicates maximum value

NE = Not Evaluated

SSLs calculated using equations in the EPA Supplemental Guidance dated 2002 Guidance Equation Input Assumptions:

- 5 cars/day (2 tons/car)
- 5 trucks/day (20 tons/truck)
- 3 meter source depth thickness

	Hematologic	0
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	1
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

	Hematologic	1
	Cardiovascular	0
	Dermal	0
	Respiratory	0
	Thyroid	0
Total HI	Gastrointestinal	0
	Nervous	1
	Immune	0
	Ocular	0
	Developmental	0
	Body Weight	0

"

APPENDIX A

11



November 8, 2018

Maryland Department of Environment 1800 Washington Boulevard Baltimore MD, 21230

Attention:

Ms. Barbara Brown

Subject:

Request to Enter Temporary CHS Review

Tradepoint Atlantic Parcel B1-2

Dear Ms. Brown:

The conduct of any environmental assessment and cleanup activities on the Tradepoint Atlantic property, as well as any associated development, is subject to the requirements outlined in the following agreements:

- Administrative Consent Order (ACO) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the Maryland Department of the Environment (effective September 12, 2014); and
- Settlement Agreement and Covenant Not to Sue (SA) between Tradepoint Atlantic (formerly Sparrows Point Terminal, LLC) and the United States Environmental Protection Agency (effective November 25, 2014).

On September 11, 2014, Tradepoint Atlantic submitted an application to the Maryland Department of the Environment's (Department) Voluntary Cleanup Program (VCP).

In consultation with the Department, Tradepoint Atlantic affirms that it desires to accelerate the assessment, remediation and redevelopment of certain sub-parcels within the larger site due to current market conditions. To that end, the Department and Tradepoint Atlantic agree that the Controlled Hazardous Substance (CHS) Act (Section 7-222 of the Environment Article) and the CHS Response Plan (COMAR 26.14.02) shall serve as the governing statutory and regulatory authority for completing the development activities on Parcel B1-2 and complement the statutory requirements of the Voluntary Cleanup Program (Section 7-501 of the Environment Article). Upon submission of a Site Response and Development Work Plan and completion of the remedial activities for the sub-parcel, the Department shall issue a "No Further Action" letter upon a recordation of an environmental covenant describing any necessary land use controls for the specific sub-parcel. At such time that all the sub-parcels within the larger parcel have completed remedial activities, Tradepoint Atlantic shall submit to the Department a request for issuing a Certificate of Completion (COC) as well as all pertinent information concerning completion of remedial activities conducted on the parcel. Once the VCP has completed its review of the submitted information it shall issue a COC for the entire parcel described in Tradepoint Atlantic's VCP application.



Alternatively, Tradepoint Atlantic or other entity may elect to submit an application for a specific subparcel and submit it to the VCP for review and acceptance. If the application is received after the cleanup and redevelopment activities described in this work plan are implemented and a No Further Action letter is issued by the Department pursuant to the CHS Act, the VCP shall prepare a No Further Requirements Determination for the sub-parcel.

If Tradepoint Atlantic or other entity has not carried out cleanup and redevelopment activities described in the work plan, the cleanup and redevelopment activities may be conducted under the oversight authority of either the VCP or the CHS Act, so long as those activities comport with this work plan.

Engineering and institutional controls approved as part of this Site Response and Development Work Plan shall be described in documentation submitted to the Department demonstrating that the exposure pathways on the sub-parcel are addressed in a manner that protects public health and the environment. This information shall support Tradepoint Atlantic's request for the issuance of a COC for the larger parcel.

Please do not hesitate to contact Tradepoint Atlantic for further information.

Thank you,

Peter Haid

Senior Director of Environmental TRADEPOINT ATLANTIC 1600 Sparrows Point Boulevard Baltimore, Maryland 21219 T 443.649.5055 C 732.841.7935 phaid@tradepointatlantic.com

, ,, ,, ,,

n n

APPENDIX B

11

" "

"
"
"

" "

11

Life of the content	Parameter	Units	PAL	B1-047-SB-1	B1-047-SB-5	B1-047-SB-10*	B1-048-SB-1	B1-048-SB-7	B1-079-SB-1*	B1-079-SB-5*	B1-080-SB-1*	B1-080-SB-4*	B1-132-SB-1	B1-132-SB-5	B1-152-SB-1*	B1-152-SB-4*	B1-157-SB-1
Content	Volatile Organic Compounds			-													
Name	1,1,1-Trichloroethane	mg/kg	36,000	0.0043 U	0.01 U	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.005 U	0.0045 U	0.0049 U	0.0086 U	0.0062 U	0.0056 U	0.005 U
Section March Ma	2-Butanone (MEK)	mg/kg	190,000	0.0085 U	0.021 U	N/A	0.012 U	0.0088 U	0.0054 J	0.009 U	0.01	0.006 J	0.0098 U	0.017 U	0.012 U	0.011 U	0.01 U
Second mg/s 29 ml 9,000 1,0	Acetone	mg/kg	670,000	0.0085 UJ	0.012 B	N/A	0.012 UJ	0.0088 UJ	0.045	0.0048 J	0.084	0.048	0.0055 B	0.027 B	0.012 U	0.011 U	0.0055 J
See Procession	Benzene	mg/kg	5.1	0.0043 U	0.022	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.005 U	0.0045 U	0.0038 J	0.006 J	0.0062 U	0.0056 U	0.005 U
Page	Cyclohexane	mg/kg	27,000	0.0085 U	0.0089 J	N/A	0.012 U	0.0088 U	0.01 U	0.009 U	0.0099 U	0.009 U	0.0098 U	0.017 U	0.012 U	0.011 U	0.01 U
Section Sec	Ethylbenzene	mg/kg	25	0.0043 U	0.01 U	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.005 U	0.0045 U	0.0049 U	0.0086 U	0.0062 U	0.0056 U	0.005 U
Performance	Isopropylbenzene	mg/kg	9,900	0.0043 U	0.01 U	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.005 U	0.0045 U	0.0049 U	0.0086 U	0.0062 U	0.0056 U	0.005 U
Indexestation Control	Styrene	mg/kg	35,000	0.0043 U	0.01 U	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.005 U	0.0045 U	0.0049 U	0.0086 U	0.0062 U	0.0056 U	0.005 U
Institution	Tetrachloroethene	mg/kg	100	0.0043 U	0.01 U	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.0042 J	0.0045 U	0.0049 U	0.0086 U	0.0062 U	0.0056 U	0.005 U
System Page 2,500 0.0151 0.0181 0.01	Toluene	mg/kg	47,000	0.0043 U	0.03	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.0016 J	0.0045 U	0.0028 J	0.0067 J	0.0062 U	0.0056 U	0.005 U
Secretary Secr	Trichloroethene	mg/kg	6	0.0043 U	0.01 U	N/A	0.0059 U	0.0044 U	0.0052 U	0.0045 U	0.0024 J	0.0045 U	0.0049 U	0.0086 U	0.0062 U	0.0056 U	0.005 U
J.Biphony	Xylenes	mg/kg	2,800	0.013 U	0.016 J	N/A	0.018 U	0.013 U	0.016 U	0.013 U	0.015 U	0.013 U	0.015 U	0.026 U	0.019 U	0.017 U	0.015 U
Administration mg/sq 16,000 0,072 U 0,094 U NA 0,071 U 0,078 U 0,078 U 0,073	Semi-Volatile Organic Compounds^																
Methylphender	1,1-Biphenyl	mg/kg	200	0.072 U	0.12 J	N/A	0.052 J	0.08 U	0.045 J	0.083 U	0.073 U	0.08 U	1.3 J	0.08 U	0.071 U	0.016 J	0.031 J
Marylephelaten	2,4-Dimethylphenol	mg/kg	16,000	0.072 U	0.09 U	N/A	0.071 U	0.08 U	0.078 U	0.083 U	0.073 U	0.08 U	0.021 J	0.08 U	0.071 U	0.073 U	
Methyphenic mg/kg 41,000 0.072 U 0.097 U 0.087 U 0.081 U 0.073 U 0.083 U 0.073 U 0.083 U 0.073 U 0.0	2-Methylnaphthalene		3,000	0.021	1		0.13	0.0011 J	0.48	0.0064 J	0.026	0.034	0.47	0.1	0.038		0.3 J
R84-Methylphredynkp (Creol) mg/kg 41,000 0.14 U 0.18 U 0.18 U 0.16 U 0.16 U 0.16 U 0.16 U 0.16 U 0.16 U 0.06 U	2-Methylphenol		41,000		0.09 U								0.023 J				
Name	3&4-Methylphenol(m&p Cresol)		41,000										0.044 J				
Non-philiple mg/kg 45,000 0.096 0.12 0.0017 0.14 0.0016 J 0.014 0.0019 0.00079 0.0031 0.81 0.052 0.018 0.028 0.231 Nathrocene mg/kg 230,000 0.14 15.3 0.017 0.83 0.0046 J 0.049 0.0959 0.04 0.0057 0.05 U 0.011 0.011 0.05 U 0.071 0.071 0.05 U 0.071	Acenaphthene		45,000	0.01	1.9	0.0044 J	0.16	0.0082 U	0.016	0.0083 U	0.0098 B	0.0017 B	0.25		0.0032 J	0.46	0.028
Number mg/kg 23,000 0.14 15.3 0.017 0.38 0.0046.j 0.049 0.0097h 0.044 0.0687h 1.5 1.1 0.019 0.6 0.3	Acenaphthylene		45,000	0.096	0.12	0.0017 J	0.14	0.0016 J	0.014	0.0019 J	0.0079	0.0033 J	0.81	0.052	0.018	0.028	0.32 J
Numbersee mg/kg 230,000 0.14 15.3 0.017 0.83 0.0046 J 0.049 0.0095 h 0.04 0.0087B 1.5 1.1 0.019 0.6 0.3 Implication mg/kg 120,000 0.072 R 0.087 J 0.08 R 0.087 J 0.08 R 0.091 U 0.073 U 0.08 U 0.087 J 0.08 R 0.071 U 0.073 U 0.082 J Implication mg/kg 2.1 0.74 1.6 0.0002 3.2 J 0.008 R 0.085 U 0.073 U 0.08 U 0.087 J 0.08 R 0.071 U 0.073 U 0.082 J Implication mg/kg 2.1 1.4 37.9 0.029 7.3 J 0.028 J 0.08 R 0.08 R	Acetophenone	mg/kg	120,000	0.072 U	0.12 J	N/A	0.023 J	0.08 U	0.044 J	0.083 U	0.073 U	0.08 U	0.11 J	0.08 U	0.071 U	0.073 U	0.035 J
Send plumbrane	Anthracene	mg/kg	230,000	0.14	15.3	0.017	0.83	0.0046 J	0.049	0.0059 B	0.04	0.0087 B	1.5	1.1	0.019	0.6	0.3
Sexpoliphyrene	Benz[a]anthracene	mg/kg	21	0.67	25.3	0.015	3.3	0.012	0.15	0.014	0.17	0.01	5.2	1.5	0.11	3.7	0.68
Searagh Impurate mg/kg 2	Benzaldehyde	mg/kg	120,000	0.072 R	0.087 J	N/A	0.071 R	0.08 R	0.088	0.083 U	0.073 U	0.08 U	0.057 J	0.08 R	0.071 U	0.073 U	0.032 J
Senzel glady pleycheme mg/kg 210 1.4 36.6 0.03 $7.J$ 0.091 0.094 0.0061 0.011 0.16 0.013 $1.8.J$ $0.56J$ 0.066 4.6 0.83 J J 0.00721 0.011 0.008 J	Benzo[a]pyrene	mg/kg	2.1	0.74 J	16	0.0092	3.2 J	0.0079 J	0.18	0.039	0.23	0.016	5 J	1.6 J	0.12	5.5	1.1 J
Semode Description	Benzo[b]fluoranthene	mg/kg	21	1.4	37.9	0.029	7.3 J	0.028 J	0.4	0.058	0.43	0.033	10.9 J	3.2 J	0.34	9.3	3.1
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Benzo[g,h,i]perylene	mg/kg		0.26 J	4.8	0.0031 J	0.99 J	0.0096 J	0.061	0.011	0.16	0.013	1.8 J	0.56 J	0.066	4.6	0.83 J
Eagrolacisism	Benzo[k]fluoranthene	mg/kg	210	1.4	36.6	0.03	7 J	0.027 J	0.41	0.059	0.44	0.034	11.1 J	3.2 J	0.34	9.6	2.7
Carbazole	bis(2-Ethylhexyl)phthalate	mg/kg	160	0.072 UJ	0.09 UJ	N/A	0.071 UJ	0.08 UJ	0.078 U	0.023 J	0.015 J	0.08 U	0.27 J	0.08 UJ	0.071 U	0.073 U	0.042 B
Enging E	Caprolactam	mg/kg	400,000	0.18 U	0.35 J	N/A	0.18 U	0.2 U	0.2 U	0.21 U	0.18 U	0.2 U	0.19 U	0.2 U	0.18 U	0.18 U	0.19 UJ
Different/alplantfrances mg/kg 2.1 0.09 J 1.4 0.0082 U 0.34 J 0.0082 U 0.023 0.0083 U 0.058 U 0.0083 J 0.74 J 0.23 J 0.02 0.9 0.31 J	Carbazole	mg/kg		0.039 J	0.063 J	N/A	0.69 J	0.08 U	0.078 U	0.083 U	0.073 U	0.08 U	0.52 J	0.15	0.071 U	0.25	0.069 J
Display	Chrysene	mg/kg	2,100	0.7	24.8	0.016	3.1	0.014	0.22	0.024	0.24	0.024	5.3	1.3	0.12	4.5	0.86
The contribute mg/kg 30,000 1.2 73.6 0.11 7.2 0.033 J 0.25 0.02 B 0.46 0.03 10 4.4 0.17 6.3 1	Dibenz[a,h]anthracene	mg/kg	2.1	0.09 J	1.4	0.0082 U	0.34 J	0.0082 UJ	0.023	0.0083 U	0.054	0.0034 J	0.74 J	0.23 J	0.02	0.9	0.31 J
Fluorene mg/kg 30,000 0.012 0.86 0.016 0.097 0.0082 U 0.014 B 0.0016 B 0.0051 B 0.0043 B 0.23 0.42 0.0037 J 0.2 0.0	Di-n-ocytlphthalate	mg/kg	8,200	0.072 UJ	0.09 UJ	N/A	0.071 UJ	0.08 U	0.078 U	0.083 U	0.073 U	0.08 U	0.031 J	0.08 UJ	0.071 U	0.073 U	0.074 UJ
machanol	Fluoranthene	mg/kg	30,000	1.2	73.6	0.11	7.2	0.033 J	0.25	0.02 B	0.46	0.03	10	4.4	0.17	6.3	1
Naphthalene	Fluorene	mg/kg	30,000	0.012	0.86	0.016	0.097	0.0082 U	0.014 B	0.0016 B	0.0051 B	0.0043 B	0.23	0.42	0.0037 J	0.2	0.02
Phenol mg/kg	Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.24 J	4.2	0.0027 J	0.96 J	0.0054 J	0.051	0.006 J	0.13	0.011	2 J	0.56 J	0.056	3.9	0.84 J
Phenol mg/kg 250,000 0.072 U 0.09 U N/A 0.071 U 0.08 U 0.078 U 0.083 U 0.073 U 0.08 U 0.059 J 0.08 U 0.071 U 0.073 U 0.074 U 0.074 U 0.075 U 0.074 U 0.075 U 0	Naphthalene	mg/kg	17	0.019	0.97	0.0076 B	0.12	0.0015 J	0.28	0.0069 B	0.019 B	0.035	1.6	0.1	0.026	0.28	0.27 J
Pyrene mg/kg 23,000 1.4 80.4 0.077 7.6 0.026 J 0.22 0.026 0.54 0.033 11.1 3.5 0.15 6.1 0.97 Column	Phenanthrene	mg/kg			64.4	0.17	4.1	0.018		0.017 B	0.32	0.029 B			0.086		0.52
Note	Phenol	mg/kg		0.072 U	0.09 U		0.071 U	0.08 U	0.078 U	0.083 U	0.073 U	0.08 U	0.059 J	0.08 U	0.071 U	0.073 U	0.074 U
Arcelor 1016 mg/kg 27 0.0574 U N/A N/A 0.0558 U N/A 0.0563 U N/A 0.0563 U N/A 0.0547 U N/A 0.0574 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0563 U N/A 0.0563 U N/A 0.0547 U N/A 0.353 N/A 0.0545 U N/A 0.0559 U N/A 0.0501 U N/A 0.0563 U N/A 0.0563 U N/A 0.0547 U N/A 0.353 N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0560 U N/A 0.0563 U N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0545 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0545 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0545 U N/	Pyrene	mg/kg	23,000	1.4	80.4	0.077	7.6	0.026 J	0.22	0.026	0.54	0.033	11.1	3.5	0.15	6.1	0.97
Arcolor 1242 mg/kg 0.97 0.0574 U N/A N/A 0.0558 U N/A 0.0563 U N/A 0.0547 U N/A 0.353 N/A 0.0545 U N/A 0.0559 U N/A 0.0512 U N/A 0.059 U N/A 0.0547 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.059 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U	PCBs																
Arcolor 1254 mg/kg 0.97 0.0574 U N/A N/A 0.0469 J N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0574 U N/A 0.0559 U N/A 0.0590 U N/A 0.0574 U N/A 0.0574 U N/A 0.0559 U N/A 0.0563 U N/A 0.0563 U N/A 0.0547 U N/A 0.0574 U N/A 0.0574 U N/A 0.0545 U N/A 0.0559 U N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0563 U N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0	Aroclor 1016	mg/kg	27	0.0574 U	N/A	N/A	0.0558 U	N/A	0.0563 U	N/A	0.0547 U	N/A	0.0574 U	N/A	0.0545 U	N/A	0.0559 U
Arcolor 1254 mg/kg 0.97 0.0574 U N/A N/A 0.0469 J N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0563 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0561 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0561 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0	Aroclor 1242	mg/kg	0.97	0.0574 U	N/A	N/A	0.0558 U	N/A	0.0563 U	N/A	0.0547 U	N/A	0.353	N/A	0.0545 U	N/A	0.0559 U
Aroclor 1260 mg/kg 0.99 0.0574 U N/A N/A 0.0558 U N/A 0.0563 U N/A 0.0547 U N/A 0.0574 U N/A 0.0574 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0559 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0545 U N/A 0.0559 U N/A 0.0547 U N/A 0.0547 U N/A 0.0545 U N/A 0.0	Aroclor 1254		0.97	0.0574 U	N/A	N/A	0.0469 J	N/A	0.0563 U	N/A	0.0547 U	N/A	0.477 J	N/A	0.0545 U	N/A	0.0559 U
PCBs (total) mg/kg 0.97 0.0574 U N/A N/A 0.0469 J N/A 0.0563 U N/A 0.0547 U N/A 1.172 N/A 0.0545 U N/A 0.17 CPH/Oil and Grease Diesel Range Organics mg/kg 6,200 50.6 J 178 J N/A 140 J 5.8 J 472 788 370 139 348 74.8 45.5 58.1 117 J	Aroclor 1260		0.99	0.0574 U	N/A	N/A	0.0558 U	N/A	0.0563 U	N/A	0.0547 U	N/A	0.0574 U	N/A	0.0545 U	N/A	0.17
TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 50.6 J 178 J N/A 140 J 5.8 J 472 788 370 139 348 74.8 45.5 58.1 117 J Gasoline Range Organics mg/kg 6,200 10.3 U 23.1 U N/A 22.8 U 10.6 UJ 24.9 9.5 U 11.5 U 9.7 U 11.8 U 18.5 U 13.1 U 11.4 U 11 U	Aroclor 1262	mg/kg		0.0574 U	N/A	N/A	0.0558 U	N/A	0.0563 U	N/A	0.0547 U	N/A	0.342	N/A	0.0545 U	N/A	0.0559 U
TPH/Oil and Grease Diesel Range Organics mg/kg 6,200 50.6 J 178 J N/A 140 J 5.8 J 472 788 370 139 348 74.8 45.5 58.1 117 J Gasoline Range Organics mg/kg 6,200 10.3 U 23.1 U N/A 22.8 U 10.6 UJ 24.9 9.5 U 11.5 U 9.7 U 11.8 U 18.5 U 13.1 U 11.4 U 11 U	PCBs (total)		0.97	0.0574 U	N/A	N/A	0.0469 J	N/A	0.0563 U	N/A	0.0547 U	N/A	1.172	N/A	0.0545 U	N/A	0.17
Gasoline Range Organics mg/kg 6,200 10.3 U 23.1 U N/A 22.8 U 10.6 UJ 24.9 9.5 U 11.5 U 9.7 U 11.8 U 18.5 U 13.1 U 11.4 U 11 U	TPH/Oil and Grease																
Gasoline Range Organics mg/kg 6,200 10.3 U 23.1 U N/A 22.8 U 10.6 UJ 24.9 9.5 U 11.5 U 9.7 U 11.8 U 18.5 U 13.1 U 11.4 U 11 U	Diesel Range Organics	mg/kg	6,200	50.6 J	178 J	N/A	140 J	5.8 J	472	788	370	139	348	74.8	45.5	58.1	117 J
	Gasoline Range Organics								24.9				11.8 U	18.5 U			11 U
71 wing Orewood	Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Detection in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this analyte in the sample.

[^]PAH compounds were analyzed via SIM

^{*}indicates non-validated data

Parameter	Units	PAL	B1-157-SB-8	B1-159-SB-1	B1-159-SB-5	B1-167-SB-1	B1-167-SB-5	B2-004-SB-1*	B2-004-SB-5*	B5-005-SB-1	B5-005-SB-4.5	B5-006-SB-1	B5-006-SB-5	B5-012-SB-1	B5-012-SB-5	B5-015-SB-1
Volatile Organic Compounds																
1,1,1-Trichloroethane	mg/kg	36,000	0.0064 U	0.0023 J	0.13	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.0069 U	0.0051 U	0.0075 U	0.0056 U	0.005 U	0.0047 U
2-Butanone (MEK)	mg/kg	190,000	0.013 U	0.011 U	0.023 U	0.0098 U	0.016 U	N/A	N/A	0.014 U	0.014 U	0.01 U	0.015 U	0.011 U	0.01 U	0.0094 U
Acetone	mg/kg	670,000	0.013 U	0.011 U	0.014 B	0.0098 UJ	0.016 UJ	N/A	N/A	0.043	0.022	0.065	0.043	0.1	0.032	0.0094 R
Benzene	mg/kg	5.1	0.0064 U	0.0023 J	0.011 U	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.0062 J	0.0029 J	0.0056 J	0.0056 U	0.005 U	0.0047 U
Cyclohexane	mg/kg	27,000	0.013 U	0.011 U	0.023 U	0.0098 U	0.016 U	N/A	N/A	0.014 U	0.014 U	0.01 U	0.015 U	0.014	0.01 U	0.0094 U
Ethylbenzene	mg/kg	25	0.0064 U	0.0054 U	0.011 U	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.027	0.0051 U	0.0075 U	0.0056 U	0.005 U	0.0047 U
Isopropylbenzene	mg/kg	9,900	0.0064 U	0.0054 U	0.011 U	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.0041 J	0.0051 U	0.0075 U	0.0056 U	0.005 U	0.0047 U
Styrene	mg/kg	35,000	0.0064 U	0.0054 U	0.011 U	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.0069 U	0.0051 U	0.0075 U	0.0056 U	0.005 U	0.0047 U
Tetrachloroethene	mg/kg	100	0.0064 U	0.0054 U	0.0072 J	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.0069 U	0.0051 U	0.0075 U	0.0056 U	0.005 U	0.0047 U
Toluene	mg/kg	47,000	0.0064 U	0.0019 J	0.011 U	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.034	0.0051 U	0.0032 J	0.0031 J	0.005 U	0.0047 U
Trichloroethene	mg/kg	6	0.0064 U	0.0054 U	0.014	0.0049 U	0.0078 U	N/A	N/A	0.0069 U	0.0069 U	0.0051 U	0.0075 U	0.0056 U	0.005 U	0.0047 U
Xylenes	mg/kg	2,800	0.019 U	0.016 U	0.034 U	0.015 U	0.023 U	N/A	N/A	0.021 U	0.022	0.015 U	0.022 U	0.017 U	0.015 U	0.014 U
Semi-Volatile Organic Compounds^	<u>, </u>		•								•		<u> </u>			
1,1-Biphenyl	mg/kg	200	0.079 U	0.95	0.091 U	0.093 U	0.45 U	0.016 J	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 U
2,4-Dimethylphenol	mg/kg	16,000	0.079 U	0.077 U	0.091 U	0.093 U	0.047 J	0.074 U	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 U
2-Methylnaphthalene	mg/kg	3,000	0.0055 J	0.35	0.0018 J	0.19	0.57	0.067	0.054	0.067	0.0016 J	0.0045 J	0.0024 J	0.2	0.023	0.068
2-Methylphenol	mg/kg	41,000	0.079 U	0.016 J	0.091 U	0.093 U	0.09 R	0.074 U	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	0.16 U	0.038 J	0.18 U	0.19 U	0.18 R	0.15 U	0.15 U	14.4 U	14.7 U	15.2 U	15 U	15.9 U	16.3 U	15.2 U
Acenaphthene	mg/kg	45,000	0.0027 J	0.14	0.0092 U	0.012 J	1.5	0.11	0.013	0.018	0.00076 J	0.0077 U	0.0074 U	0.53	0.16	0.052
Acenaphthylene	mg/kg	45,000	0.032	0.63	0.0092 U	0.061 J	0.078	0.051	0.5	0.033	0.0029 J	0.0023 J	0.0074 U	0.074 J	0.028	0.072
Acetophenone	mg/kg	120,000	0.079 U	0.1	0.091 U	0.093 U	0.09 U	0.021 J	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 U
Anthracene	mg/kg	230,000	0.018	1.1	0.0092 U	0.093 U	2.2	0.092	0.35	0.076	0.0022 J	0.0032 J	0.0074 U	1.3	0.41	0.27
Benz[a]anthracene	mg/kg	21	0.1	2.4	0.0092 U	0.33 J	3.4	0.44	1.8	0.46	0.0022 3	0.0032 3	0.0074 C	2.6	1.5	0.85
Benzaldehyde	mg/kg	120,000	0.079 U	0.055 J	0.0092 C	0.093 R	0.09 R	0.031 J	0.076 U	7.2 UJ	7.4 UJ	7.6 UJ	7.5 UJ	8 U	8.2 U	7.6 U
Benzo[a]pyrene	mg/kg	2.1	0.077 J	2.3 J	0.0091 K	0.093 K	3.1	0.72	2	0.5	0.0091	0.014	0.0025 J	1.8	1.1	1.3
Benzo[b]fluoranthene	mg/kg	21	0.43 J	4.8 J	0.0032 C	0.21 J 0.66 J	5.1	1.3	2.9	0.86	0.0031	0.014	0.00233	3.8	1.6	2.1
Benzo[g,h,i]perylene	mg/kg	21	0.096 J	1.3 J	0.0021 B	0.00 J	1.5	0.7	1.4	0.14	0.022 0.0038 J	0.0063 J	0.0077 0.0074 U	0.85	0.48	0.73
Benzo[k]fluoranthene	mg/kg	210	0.090 J	4.9 J	0.0092 U	0.13 J 0.67 J	5.2	0.98	1.2	0.14	0.0038 J	0.0003 3	0.0063 J	3.8	0.48	0.73
bis(2-Ethylhexyl)phthalate	mg/kg	160	0.079 U	0.39 J	0.0022 J 0.091 U	0.093 UJ	0.09 UJ	0.024 B	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 U
Caprolactam	mg/kg	400,000	0.079 U	0.19 U	0.031 U	0.033 U3	0.09 UJ	0.024 B	0.076 U	18 U	18.4 U	7.0 U	18.7 U	19.9 U	20.4 U	19 U
Carbazole	mg/kg	400,000	0.2 U	0.19 0	0.091 U	0.23 U	0.22 U	0.19 J	0.19 0	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 U
Chrysene	mg/kg	2,100	0.079 0	2.5	0.00088 B	0.36 J	3.7	0.46	1.8	0.46	0.01	0.019	0.0025 J	2.6	1.4	0.86
Dibenz[a,h]anthracene	mg/kg	2,100	0.033 J	0.49 J	0.0092 U	0.062 J	0.47	0.17	0.56	0.071	0.0017 J	0.0026 J	0.0023 J	0.4	0.22	0.38
Di-n-ocytlphthalate	mg/kg	8,200	0.079 U	0.077 UJ	0.0092 U	0.002 J 0.093 UJ	0.09 UJ	0.074 U	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	8 U	8.2 U	7.6 UJ
Fluoranthene	mg/kg	30,000	0.079 0	4.8	0.0012 B	0.093 UJ	9.1	0.074 0	2.4	1.1	0.02	0.029	0.0042 J	5.6	5.8	2.9
Fluorene	mg/kg	30,000	0.0025 J	0.21	0.0012 B	0.03 J 0.012 J	1.2	0.027	0.12	0.016	0.0074 J	0.023 0.0077 U	0.0042 J 0.0015 J	0.77	0.16	0.086
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.0023 J	1.3 J	0.0092 U	0.012 J	1.3	0.57	1.4	0.010	0.00074 J	0.0077 U	0.0013 J	0.85	0.10	0.79
Naphthalene	mg/kg	17	0.1 3	1.1	0.0092 U	0.15 J 0.23 J	0.33	0.071	0.23	0.17	0.0048 B	0.0064 3	0.0011 J 0.0025 B	0.33	0.028	0.79
-		1 /	0.073	2.5	0.0016 B	0.23 J 0.54 J	11.7	0.071	1.3	0.34	0.0048 B	0.0081	0.0023 B		1.5	1
Phenanthrene Phenol	mg/kg	250,000	0.079 U	0.064 J	0.0016 B	0.093 U	0.09 R	0.074 U	0.076 U	7.2 U	7.4 U	7.6 U	7.5 U	5.1 8 U	8.2 U	1.1 7.6 U
	mg/kg	23,000	8		0.091 U 0.0012 B			+	<u> </u>							
Pyrene	mg/kg	25,000	0.091	4.9	0.0012 B	0.55 J	10.4	0.6	1.9	0.89	0.014	0.023	0.0036 J	4.1	4.6	1.3
PCBs		1 27	NT/A	0.057411	NT/A	0.057411	NT/A	0.010.11	NT/A	0.010.11	NT/A	0.010.11	NT/A	0.217	NT/A	0.010.11
Aroclor 1016	mg/kg	27	N/A	0.0574 U	N/A	0.0574 U	N/A	0.019 U	N/A	0.018 U	N/A	0.019 U	N/A	0.2 U	N/A	0.019 U
Aroclor 1242	mg/kg	0.97	N/A	0.186 J	N/A	0.0574 U	N/A	0.019 U	N/A	0.018 U	N/A	0.019 U	N/A	0.2 U	N/A	0.019 U
Aroclor 1254	mg/kg	0.97	N/A	0.638 J	N/A	0.0574 U	N/A	0.025	N/A	0.11	N/A	0.039	N/A	0.2 U	N/A	0.019 U
Aroclor 1260	mg/kg	0.99	N/A	0.0574 U	N/A	2.15	N/A	0.019 U	N/A	0.018 U	N/A	0.019 U	N/A	0.2 U	N/A	0.019 U
Aroclor 1262	mg/kg		N/A	0.438	N/A	0.0574 U	N/A	0.019 U	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
PCBs (total)	mg/kg	0.97	N/A	1.262	N/A	2.15	N/A	0.13 U	N/A	0.11 J	N/A	0.039 J	N/A	1.4 U	N/A	0.13 U
TPH/Oil and Grease	"	ı							1						1	
Diesel Range Organics	mg/kg	6,200	24.2	280	11.2	253	1,880	64.7	30.1	40.2	4.8 J	47.7	66.6	253	15.4	65.2
Gasoline Range Organics	mg/kg	6,200	13.3 U	14.3 U	22.8 U	11 U	18.4 U	2.2 B	4.6 B	14.4 U	18.7 U	13.2 U	16.1 U	11.2 U	9.8 U	10.8 U
Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	396	438	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Detection in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this analyte in the sample.

[^]PAH compounds were analyzed via SIM

^{*}indicates non-validated data

Parameter	Units	PAL	B5-015-SB-5	B5-060-SB-1	B5-060-SB-5	B5-061-SB-1	B5-098-SB-1	B5-098-SB-4	B5-099-SB-1	B5-099-SB-4.5	B5-100-SB-1	B5-100-SB-5	B5-101-SB-1	B5-101-SB-5	B5-102-SB-1	B5-103-SB-1
Volatile Organic Compounds																
1,1,1-Trichloroethane	mg/kg	36,000	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	0.72 U	0.27 U	0.25 U	0.0056 U	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
2-Butanone (MEK)	mg/kg	190,000	0.0094 U	0.013 U	0.013 U	0.0088 U	0.51 U	1.4 U	0.53 U	0.49 U	0.011 U	0.014 U	0.013 U	0.011 U	0.0086 U	0.0087 U
Acetone	mg/kg	670,000	0.0094 R	0.013 U	0.048	0.041	0.51 U	1.4 U	0.53 U	0.49 U	0.1	0.036	0.013 R	0.011 R	0.047	0.039
Benzene	mg/kg	5.1	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	0.52 J	0.27 U	0.25 U	0.0035 J	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
Cyclohexane	mg/kg	27,000	0.0094 U	0.013 U	0.0051 J	0.0088 U	0.51 U	1.4 U	0.53 U	0.49 U	0.011 U	0.014 U	0.013 U	0.011 U	0.0086 U	0.0087 U
Ethylbenzene	mg/kg	25	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	1.4	0.27 U	0.16 J	0.0056 U	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
Isopropylbenzene	mg/kg	9,900	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	0.41 J	0.27 U	0.78	0.0056 U	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
Styrene	mg/kg	35,000	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	0.72 U	0.27 U	0.25 U	0.0056 U	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
Tetrachloroethene	mg/kg	100	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	0.72 U	0.27 U	0.25 U	0.0056 U	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
Toluene	mg/kg	47,000	0.0047 U	0.0064 U	0.0042 J	0.0044 U	0.08 J	1.1	0.1 J	0.25 U	0.0056 U	0.007 U	0.0031 J	0.0053 U	0.0043 U	0.0043 U
Trichloroethene	mg/kg	6	0.0047 U	0.0064 U	0.0066 U	0.0044 U	0.25 U	0.72 U	0.27 U	0.25 U	0.0056 U	0.007 U	0.0065 U	0.0053 U	0.0043 U	0.0043 U
Xylenes	mg/kg	2,800	0.014 U	0.019 U	0.02 U	0.013 U	0.76 U	3.5	0.28 J	0.25 J	0.017 U	0.021 U	0.019 U	0.016 U	0.013 U	0.013 U
Semi-Volatile Organic Compounds^		_,	*****	******	****		,,,, , _	U. 0	0,20 0	0.20	0.02,	0.000		0.000		0.000
1,1-Biphenyl	mg/kg	200	7.9 U	7.2 U	7.6 U	7.2 U	7.5 U	8 U	7.2 U	8.1 U	7.5 U	8.1 U	7.8 U	8 U	7.5 U	7.3 U
2,4-Dimethylphenol	mg/kg	16,000	7.9 U	7.2 U	7.6 U	7.2 U	7.5 U	2.6 J	7.2 U	8.1 U	7.5 U	8.1 U	7.8 U	8 U	7.5 U	7.3 U
2-Methylnaphthalene	mg/kg	3,000	0.0035 J	0.015	0.13 J	0.013	0.58	5.3	0.94	4.9	0.14 J	0.55	0.089	0.0074 J	0.49	0.27
2-Methylphenol	mg/kg	41,000	7.9 U	7.2 U	7.6 U	7.2 U	7.5 U	8 U	7.2 U	8.1 U	7.5 U	8.1 U	7.8 U	8 U	7.5 U	7.3 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	15.7 U	14.4 U	15.1 U	14.3 U	15 U	16 U	14.3 U	16.2 U	15 U	16.2 U	15.7 U	16 U	14.9 U	14.5 U
Acenaphthene	mg/kg	45,000	0.0078 U	0.0025 J	0.067 J	0.0016 J	0.02	0.96	0.015	4	0.24 J	0.12	0.051	0.0007 J	2.8	1.1
Acenaphthylene	mg/kg	45,000	0.0078 J	0.0023 J	3.4	0.0038 J	0.033	0.48	0.075	1.5	0.18 J	0.12	0.024	0.0007 J	0.14 J	0.11 J
Acetophenone	mg/kg	120,000	7.9 U	7.2 U	7.6 U	7.2 U	7.5 U	8 U	7.2 U	8.1 U	7.5 U	8.1 U	7.8 U	8 U	7.5 U	7.3 U
Anthracene	mg/kg	230,000	0.003 J	0.0085	2.2	0.0073	0.069	3.5	0.091	4.6	1.1	0.6	0.33	0.0062 J	5.3	2.9
Benz[a]anthracene	mg/kg	230,000	0.0099	0.003	14.7	0.049	0.23	6.5	0.12	4.2	8.3	1.3	1.5	0.002 3	10.1	9.1
Benzaldehyde	mg/kg	120,000	7.9 U	7.2 UJ	7.6 UJ	7.2 UJ	7.5 UJ	8 UJ	7.2 UJ	8.1 UJ	7.5 UJ	8.1 UJ	7.8 U	8 U	7.5 UJ	7.3 UJ
Benzo[a]pyrene	mg/kg	2.1	0.0094 J	0.067	15.6	0.056	0.25	9.4	0.14	3.6 J	6.8	1.1	1.1 J	0.029 J	9.3	9.2
Benzo[b]fluoranthene	mg/kg	2.1	0.0094 J 0.019 J	0.12	23.6	0.036	0.72	13.2	0.51	7.6 J	14.2	2.2 J	4.4 J	0.029 J	13.6	14.6
Benzo[g,h,i]perylene		21	0.019 J 0.0056 J	0.12	5	0.018	0.72	4.1	0.078	1.3 J	1.7	0.19	0.41 J	0.003 J 0.011 J	2.9	3.7
Benzo[g,n,r]perylene Benzo[k]fluoranthene	mg/kg mg/kg	210	0.0056 J 0.0075 J	0.026	7.7	0.018	0.17	5	0.078	2.6 J	4.6	0.19 0.97 J	0.41 J	0.011 J 0.024 J	4.6	4.8
bis(2-Ethylhexyl)phthalate	mg/kg	160	7.9 U	7.2 U	7.6 U	7.2 U	7.5 U	8 U	7.2 U	8.1 U	7.5 U	8.1 U	7.8 U	8 U	7.5 U	7.3 U
Caprolactam		400.000	19.6 U	18 U	18.9 U	17.9 U	18.7 U	20 U	17.9 U	20.3 U	18.7 U	20.2 U	19.6 U	20 U	18.7 U	18.1 U
Carbazole	mg/kg	400,000	7.9 U	7.2 U	7.6 U	7.2 U	7.5 U	8 U	7.2 U	8.1 U	7.5 U	8.1 U	7.8 U	8 U	7.5 U	7.3 U
	mg/kg	2,100	0.014	0.064	13.9	0.052	0.28	6.5	0.15	4	8.4	1.3	3	0.032	9.3	8.5
Chrysene	mg/kg	2,100	0.014 0.0019 J	0.004	2.2	0.052 0.0071 J	0.28	2.3	0.031	0.67 J	0.85	0.13	0.23 J	0.032 0.0044 J	1.4	1.8
Dibenz[a,h]anthracene	mg/kg	8,200	7.9 UJ	7.2 U	7.6 U	7.2 U	7.5 U	8 U	7.2 U	8.1 U	7.5 U	8.1 U	7.8 UJ	8 UJ	7.5 U	7.3 U
Di-n-ocytlphthalate Fluoranthene	mg/kg	30,000	0.018	0.078	60.5	0.072	0.41	9.1	0.21	8.3	12	2.6		0.038	27.3	19.3
	mg/kg	30,000	ł						0.051		0.29 J	0.22	4.1 0.05		2.6	
Fluorene	mg/kg		0.0019 J 0.0051 J	0.0023 J 0.025	0.28	0.0011 J	0.033	2.2	0.051	6		0.22	0.05 0.47 J	0.0013 J 0.012 J		1.2
Indeno[1,2,3-c,d]pyrene	mg/kg	21			6.1	0.02	0.16	4.5		1.6 J	1.9				3.4	•
Naphthalene	mg/kg	17	0.0054 B	0.017	0.25	0.015	0.22	1.9	0.43	3.1	0.13 B	0.36	0.092	0.0073 B	0.81	0.27
Phenanthrene	mg/kg	250,000	0.014	0.04 7.2 U	4.9 7.6 U	0.036 7.2 U	0.24 7.5 U	7.8 8 U	7.2.11	15.6	3.9	2.5	1.2	0.023 8 U	20.1	10.5
Phenol	mg/kg	250,000	7.9 U						7.2 U	8.1 U	7.5 U	8.1 U	7.8 U		7.5 U	7.3 U
Pyrene	mg/kg	23,000	0.016	0.075	26.1	0.066	0.36	6.7	0.19	6.7	9.9	1.9	3.5	0.032	21.1	15.8
PCBs	T I		27/1	0.010.77	77/	0.010.77	0.000.77	27/1		37/1		37/1	0.5.7	27//		2 21 77
Aroclor 1016	mg/kg	27	N/A	0.018 U	N/A	0.018 U	0.092 U	N/A	0.09 U	N/A	0.93 U	N/A	9.7 U	N/A	0.92 U	0.91 U
Aroclor 1242	mg/kg	0.97	N/A	0.018 U	N/A	0.018 U	0.092 U	N/A	0.09 U	N/A	0.93 U	N/A	9.7 U	N/A	0.92 U	0.91 U
Aroclor 1254	mg/kg	0.97	N/A	0.012 J	N/A	0.018 U	0.26	N/A	0.11	N/A	0.93 U	N/A	54.2	N/A	0.92 U	0.91 U
Aroclor 1260	mg/kg	0.99	N/A	0.013 J	N/A	0.014 J	0.092 U	N/A	0.09 U	N/A	0.93 U	N/A	9.7 U	N/A	0.92 U	0.91 U
Aroclor 1262	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
PCBs (total)	mg/kg	0.97	N/A	0.13 U	N/A	0.13 U	0.26 J	N/A	0.63 U	N/A	6.5 U	N/A	54.2 J	N/A	6.4 U	6.4 U
TPH/Oil and Grease																
Diesel Range Organics	mg/kg	6,200	5 J	18.5	236	23.5	371	4,760	1,140	7,780	519	179	280 J	5.7 J	265	921
Gasoline Range Organics	mg/kg	6,200	9.5 U	11.7 U	11.2 U	11.3 U	51.6 U	304 U	54.2 U	165 J	10.3 U	18.5 U	62.2 U	10.9 U	9.1 U	195 U
Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Detection in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.
- R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this analyte in the sample.

[^]PAH compounds were analyzed via SIM

^{*}indicates non-validated data

Parameter	Units	PAL	B5-103-SB-4.5	B5-106-SB-1*	B5-106-SB-5*	B5-107-SB-1*	B5-107-SB-6*	B5-109-SB-1*	B5-161-SB-1	B5-161-SB-4	B5-161-SB-10*	B5-178-SB-1	B5-178-SB-5
Volatile Organic Compounds													
1,1,1-Trichloroethane	mg/kg	36,000	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.0049 U	0.35 U	N/A	0.0047 U	0.0046 U
2-Butanone (MEK)	mg/kg	190,000	0.014 U	0.011 U	0.011 U	0.013 U	0.01 U	0.012 U	0.0098 U	0.71 U	N/A	0.0095 U	0.0092 U
Acetone	mg/kg	670,000	0.014 U	0.011 U	0.028	0.013 U	0.031	0.012 U	0.069	0.71 U	N/A	0.062	0.025
Benzene	mg/kg	5.1	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.004 J	0.26 J	N/A	0.0047 U	0.0046 U
Cyclohexane	mg/kg	27,000	0.014 U	0.011 U	0.011 U	0.013 U	0.01 U	0.012 U	0.0098 U	0.71 U	N/A	0.0095 U	0.0092 U
Ethylbenzene	mg/kg	25	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.0049 U	0.35 U	N/A	0.0047 U	0.0046 U
Isopropylbenzene	mg/kg	9,900	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.0049 U	0.35 U	N/A	0.0047 U	0.0046 U
Styrene	mg/kg	35,000	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.0049 U	0.19 J	N/A	0.0047 U	0.0046 U
Tetrachloroethene	mg/kg	100	0.0071 U	0.0055 U	0.0053 U	0.0041 J	0.014	0.0058 U	0.0049 U	0.35 U	N/A	0.0047 U	0.0046 U
Toluene	mg/kg	47,000	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.0021 J	0.28 J	N/A	0.0047 U	0.0046 U
Trichloroethene	mg/kg	6	0.0071 U	0.0055 U	0.0053 U	0.0063 U	0.005 U	0.0058 U	0.0049 U	0.35 U	N/A	0.0047 U	0.0046 U
Xylenes	mg/kg	2,800	0.021 U	0.017 U	0.016 U	0.019 U	0.015 U	0.017 U	0.015 U	0.26 J	N/A	0.014 U	0.014 U
Semi-Volatile Organic Compounds^	88	_,	*******		0.000	0.007		*****		0.200			
1,1-Biphenyl	mg/kg	200	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	26.8	N/A	7.4 U	8.1 U
2,4-Dimethylphenol	mg/kg	16,000	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	2.4 J	N/A	7.4 U	8.1 U
2-Methylnaphthalene	mg/kg	3,000	0.35	0.006 J	0.0017 J	0.0063 J	0.02 J	0.0034 J	0.35	25.4	0.051	0.45	0.16 U
2-Methylphenol	mg/kg	41,000	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	7.7 U	N/A	7.4 U	8.1 U
3&4-Methylphenol(m&p Cresol)	mg/kg	41,000	16.8 U	14.6 U	14.1 U	15.1 U	14.9 U	15.1 U	14.2 U	2.2 J	N/A	14.9 U	16.3 U
Acenaphthene	mg/kg	45,000	0.28	0.0012 J	0.0071 U	0.0077 U	0.15 U	0.00073 J	0.2	28.9	0.044	4.8	0.059 J
Acenaphthylene	mg/kg	45,000	0.067	0.0012 J	0.013	0.002 J	0.017 J	0.00095 J	1.2	29.5	0.039	0.33	0.16 U
Acetophenone	mg/kg	120,000	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	7.7 U	N/A	7.4 U	8.1 U
Anthracene	mg/kg	230,000	0.36	0.0034 J	0.0071	0.0028 J	0.15 U	0.0022 J	26	192	0.28	12	0.17
Benz[a]anthracene	mg/kg	21	0.55	0.014	0.021	0.011	0.07 J	0.0062 J	279	290	0.34	29.9	0.25
Benzaldehyde	mg/kg	120,000	8.4 UJ	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 UJ	7.7 UJ	N/A	7.4 UJ	8.1 UJ
Benzo[a]pyrene	mg/kg	2.1	0.49	0.013	0.031	0.0083	0.051 J	0.0059 J	158	215	0.35	27.4	0.21
Benzo[b]fluoranthene	mg/kg	21	1.2	0.027	0.05	0.022	0.11 J	0.011	521	307	0.54	40.8	0.31
Benzo[g,h,i]perylene	mg/kg		0.13	0.0099	0.02	0.0081	0.035 J	0.0057 J	53.2	105	0.073	9.9	0.066 J
Benzo[k]fluoranthene	mg/kg	210	1	0.008	0.023	0.0081	0.037 J	0.005 J	270	136	0.28	16.2	0.12 J
bis(2-Ethylhexyl)phthalate	mg/kg	160	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	7.7 U	N/A	7.4 U	8.1 U
Caprolactam	mg/kg	400,000	21 U	18.3 U	17.6 U	18.9 U	18.6 U	18.9 U	17.8 U	19.2 U	N/A	18.6 U	20.3 U
Carbazole	mg/kg	,	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	8.6	233	N/A	5.5 J	8.1 U
Chrysene	mg/kg	2,100	0.63	0.017	0.024	0.025	0.053 J	0.0086	292	248	0.33	27.6	0.21
Dibenz[a,h]anthracene	mg/kg	2.1	0.085	0.0029 J	0.008	0.0039 J	0.15 U	0.0019 J	25.2	44.6	0.035	5.3	0.16 U
Di-n-ocytlphthalate	mg/kg	8,200	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	7.7 U	N/A	7.4 U	8.1 U
Fluoranthene	mg/kg	30,000	1.6	0.031	0.018	0.035	0.088 J	0.014	508	745	1	58.3	0.49
Fluorene	mg/kg	30,000	0.2	0.0023 J	0.0012 J	0.0012 J	0.15 U	0.0019 J	1.2	194	0.27	4.1	0.091 J
Indeno[1,2,3-c,d]pyrene	mg/kg	21	0.16	0.0084	0.02	0.0048 J	0.03 J	0.0048 J	75.3	122	0.077	12.1	0.056 J
Naphthalene	mg/kg	17	0.85	0.01 B	0.0035 B	0.019	0.26 B	0.0063 B	1.5	54.4	0.14	0.73	0.063 B
Phenanthrene	mg/kg		0.77	0.021	0.0065 J	0.016	0.053 J	0.011	240	809	1	30.2	0.39
Phenol	mg/kg	250,000	8.4 U	7.3 U	7 U	7.6 U	7.4 U	7.6 U	7.1 U	7.7 U	N/A	7.4 U	8.1 U
Pyrene	mg/kg	23,000	1.2	0.026	0.019	0.031	0.073 J	0.012	407	518	0.71	46.7	0.4
PCBs		,			1	1					<u> </u>		
Aroclor 1016	mg/kg	27	N/A	0.018 U	N/A	0.16	N/A	0.019 U	0.9 U	N/A	N/A	0.93 U	N/A
Aroclor 1242	mg/kg	0.97	N/A	0.018 U	N/A	0.096 U	N/A	0.019 U	0.9 U	N/A	N/A	0.93 U	N/A
Aroclor 1254	mg/kg	0.97	N/A	0.018 U	N/A	0.096 U	N/A	0.019 U	0.9 U	N/A	N/A	0.93 U	N/A
Aroclor 1260	mg/kg	0.99	N/A	0.018 U	N/A	0.096 U	N/A	0.019 U	0.9 U	N/A	N/A	0.93 U	N/A
Aroclor 1262	mg/kg		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
PCBs (total)	mg/kg	0.97	N/A	0.13 U	N/A	0.67 U	N/A	0.13 U	6.3 U	N/A	N/A	6.5 U	N/A
TPH/Oil and Grease	11 1115/115	0.27		3.12 0	1 11 1	3.07.0		3.12 0	3.5 3				
Diesel Range Organics	mg/kg	6,200	251	12.1	7 J	24.9	41.6	14.4	3,370	17,900	N/A	1,530	11.1
Gasoline Range Organics	mg/kg	6,200	65.8 U	11.1 U	11.1 U	10 U	10.8 U	14.4 U	11.2 U	297 UJ	N/A	212 U	11.1 11 U
Oil and Grease	mg/kg	6,200	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
On and Orease	mg/kg	0,200	11/71	1 N/ /A	1 V/ /A	1 V/ /A	1 1/ /1	11/11	1 V /P1	1 N/ /1	1 N/ /A	1 N/ / 1	1 N/ /A

Detection in bold

Values in red indicate an exceedance of the Project Action Limit (PAL)

[^]PAH compounds were analyzed via SIM

^{*}indicates non-validated data

U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.

UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.

J: The positive result reported for this analyte is a quantitative estimate.

B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

R: The result for this analyte is unreliable. Additional data is needed to confirm or disprove the presence of this analyte in the sample.

Sub-Parcel B1-2 Summary of Inorganics Detected in Soil (NAPL Screening Locations)

Parameter	Units	PAL	B1-047-SB-1	B1-047-SB-5	B1-047-SB-10*	B1-048-SB-1	B1-048-SB-7	B1-048-SB-10*	B1-079-SB-1*	B1-079-SB-5*
Metals										
Aluminum	mg/kg	1,100,000	25,700	50,000	N/A	19,100	13,000	N/A	13,000	19,100
Antimony	mg/kg	470	13.2 J	3.8 UJ	N/A	2.9 UJ	3.2 UJ	N/A	18.7	3.4 U
Arsenic	mg/kg	3	12.9	29.1	8	24.7	5.1	3.7	17.7	9.1
Barium	mg/kg	220,000	224 J	494 J	N/A	189 J	47 J	N/A	271	566
Beryllium	mg/kg	2,300	3.3	2.3	N/A	2.1	0.79 J	N/A	0.69 J	0.99 J
Cadmium	mg/kg	980	0.73 B	0.74 J	N/A	1.9	1.6 U	N/A	1.1 B	0.38 B
Chromium	mg/kg	120,000	496	517	N/A	155	40.3	N/A	114	2,200
Chromium VI	mg/kg	6.3	1.1 U	1.4 U	N/A	1.1 U	1.2 U	N/A	0.51 B	0.55 B
Cobalt	mg/kg	350	7.2	21.5	N/A	10.5	9	N/A	27.8	9.1
Copper	mg/kg	47,000	13,200	163	N/A	382	18.9	N/A	949	244
Iron	mg/kg	820,000	171,000	62,500	N/A	105,000	21,500	N/A	127,000	51,300
Lead	mg/kg	800	198	43.3	N/A	165	18.3	N/A	715	161
Manganese	mg/kg	26,000	11,400	2,460	N/A	4,620	278	N/A	1,270	9,680
Mercury	mg/kg	350	0.027 J	0.083 J	N/A	0.047 J	0.035 J	N/A	0.22	0.041 J
Nickel	mg/kg	22,000	161 J	114 J	N/A	65.9 J	54.1 J	N/A	107	40.8
Selenium	mg/kg	5,800	3.9 U	8.1	N/A	3.8 U	4.2 U	N/A	4.5 U	4.6 U
Silver	mg/kg	5,800	13.6	3.8 U	N/A	2.9 U	3.2 U	N/A	1.5 J	3.4 U
Thallium	mg/kg	12	9.8 U	10.1 U	N/A	9.6 U	10.6 U	N/A	11.1 U	11.4 U
Vanadium	mg/kg	5,800	218	74.6	N/A	295	33.1	N/A	44.5	737
Zinc	mg/kg	350,000	449 J	91.9 J	N/A	547 J	44.8 J	N/A	355	184
Other										
Cyanide	mg/kg	150	0.53 J-	1.5 J-	N/A	0.31 J-	0.64 UJ	N/A	2	0.32 B

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

Sub-Parcel B1-2
Summary of Inorganics Detected in Soil (NAPL Screening Locations)

Parameter	Units	PAL	B1-080-SB-1*	B1-080-SB-4*	B1-132-SB-1	B1-132-SB-5	B1-152-SB-1*	B1-152-SB-4*	B1-157-SB-1	B1-157-SB-8
Metals	<u>"</u>	<u> </u>								
Aluminum	mg/kg	1,100,000	9,770	12,700	20,100	26,700	16,100	13,300	12,500	29,600
Antimony	mg/kg	470	2.8 J	3.3 U	3 UJ	3.5 UJ	3 U	3 U	2.8 UJ	3.1 UJ
Arsenic	mg/kg	3	8	4.8	7.2	7.8	15.3	16.4	29.9	38.4
Barium	mg/kg	220,000	171	101	249	995	244	413	163 J	288 J
Beryllium	mg/kg	2,300	0.96 J	1.2	2.8	1.6	2.5	0.59 J	1	1.5
Cadmium	mg/kg	980	0.9 B	0.22 B	2.6	1.9	2.1	1.8	2.2	0.43 B
Chromium	mg/kg	120,000	37.7	22.6	278	149	143	1,010	157 J	4,460 J
Chromium VI	mg/kg	6.3	0.3 B	0.39 B	1.1 UJ	1.2 UJ	0.26 B	0.35 B	0.35 B	0.29 B
Cobalt	mg/kg	350	7	17.9	6.4	18.8	33.7	32.3	25.9	183
Copper	mg/kg	47,000	2,460	592	82.3	197	314	323	306	438
Iron	mg/kg	820,000	44,900	19,900	89,400	63,500	205,000	99,100	215,000 J	316,000 J
Lead	mg/kg	800	731	36.2	295	10,600	311	260	279 J	23.7 J
Manganese	mg/kg	26,000	1,000	246	7,380	3,140	2,110	8,860	2,910	14,300
Mercury	mg/kg	350	0.14	0.034 J	0.99	0.079 J	0.057 J	0.04 J	0.17	0.12 U
Nickel	mg/kg	22,000	25.7	40.4	45.4	80.4	91	228	90.7 J	1,260 J
Selenium	mg/kg	5,800	3.9 U	4.4 U	2.7 J	4.6 U	4.1 U	4 U	3.7 U	2.6 J
Silver	mg/kg	5,800	3 U	3.3 U	3 U	2.6 B	2.6 J	1.1 J	2.8	3.3
Thallium	mg/kg	12	9.9 U	11.1 U	10.1 U	11.5 U	10.2 U	10.1 U	9.3 U	10.2 U
Vanadium	mg/kg	5,800	20.6	19	230	199	48.8	151	92.8 J	228 J
Zinc	mg/kg	350,000	328	108	1,800	952	504	1,030	571 J	25.3 J
Other										
Cyanide	mg/kg	150	0.24 B	0.58 B	3.2 J-	0.28 B	0.61	1.9	2.2 J-	2.6 J-

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

Sub-Parcel B1-2
Summary of Inorganics Detected in Soil (NAPL Screening Locations)

Parameter	Units	PAL	B1-159-SB-1	B1-159-SB-5	B1-167-SB-1	B1-167-SB-5	B2-004-SB-1*	B2-004-SB-5*	B5-005-SB-1	B5-005-SB-4.5
Metals	"									
Aluminum	mg/kg	1,100,000	5,860 J	1,600 J	18,600	52,900	16,000	4,610	23,100	26,700
Antimony	mg/kg	470	3 UJ	4 UJ	4.2 UJ	3.5 UJ	2.7 U	2.3 U	2.8 UJ	1.8 UJ
Arsenic	mg/kg	3	6	2.7 U	71.5	2.9 U	2.2 U	5.6	19.6 J	4.6 J
Barium	mg/kg	220,000	71.1 J	28.3 J	402 J	403 J	50.2	45.6	313 J	654 J
Beryllium	mg/kg	2,300	0.42 B	1.3 U	1.9	2.6	0.13 J	0.17 J	2.8	3.7
Cadmium	mg/kg	980	4.1	2 U	7.1	0.4 J	0.59 J	1.1 U	9.5	2.3 B
Chromium	mg/kg	120,000	131 J	13.5 J	176	363	1,180	55.6	250	352
Chromium VI	mg/kg	6.3	1.2 UJ	1.4 UJ	1.4 U	1.3 U	5.2	0.56 B	1.1 UJ	1.1 UJ
Cobalt	mg/kg	350	4.6 J	3.9 J	54.8	24	2.3 J	6.3	16 J	2.1 J
Copper	mg/kg	47,000	54.1 J	14.3 J	698	98.4	36.9	47.4	179 J	41.9 J
Iron	mg/kg	820,000	73,600 J	37,800 J	323,000	55,000	180,000	51,800	124,000	58,100
Lead	mg/kg	800	156 J	6.2 J	466	2.9 U	106	68.5	463	20.4 J
Manganese	mg/kg	26,000	3,660 J	452 J	6,880	3,350	24,500	1,220	10,300	38,900
Mercury	mg/kg	350	0.85 J-	0.13 UJ	0.066 J	0.13 U	0.018 B	0.044 B	0.1 UJ	0.11 UJ
Nickel	mg/kg	22,000	27.8 J	15.1 J	263 J	118 J	19.3	16.7	44.2 J	16.5 J
Selenium	mg/kg	5,800	4 U	5.4 U	5.6 U	6	3.5 U	3.1 U	3.8 U	2.4 U
Silver	mg/kg	5,800	3 U	4 U	4 J	3.5 U	22.8	3.6	2.8 U	0.49 B
Thallium	mg/kg	12	9.9 U	10.7 U	11.2 U	11.5 U	8.9 U	7.7 U	9.4 U	6 U
Vanadium	mg/kg	5,800	99.1 J	10.6 J	116	30.9	806	320	359	1,030
Zinc	mg/kg	350,000	2,530 J	15.6 J	2,730 J	10.2 J	121	207	4,360	23.7
Other										
Cyanide	mg/kg	150	2.2 J-	0.12 B	1.5 J-	47.2 J-	0.34 J	0.35 J	5.1 J-	49.7 J-

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

Sub-Parcel B1-2 Summary of Inorganics Detected in Soil (NAPL Screening Locations)

Danamatan	Units	PAL	B5-006-SB-1	B5-006-SB-5	B5-012-SB-1	B5-012-SB-5	B5-015-SB-1	B5-015-SB-5	B5-015-SB-10*	B5-060-SB-1
Parameter	Ullits	PAL	D3-000-SD-1	D3-000-SD-3	D3-012-3D-1	D3-012-3D-3	D3-013-3D-1	D3-013-3D-3	D3-013-3D-10	D3-000-SD-1
Metals										
Aluminum	mg/kg	1,100,000	40,100	24,200	14,200	14,000	16,300	16,200	N/A	31,100
Antimony	mg/kg	470	2.8 UJ	2.9 UJ	2.7 UJ	2.8 UJ	2.6 UJ	3 UJ	N/A	3.1 UJ
Arsenic	mg/kg	3	2.3 U	4.2 J	5.3	6.9	8.6	3.8	5.6	2.5 U
Barium	mg/kg	220,000	652 J	435 J	313 J	103 J	265	55.1	N/A	374 J
Beryllium	mg/kg	2,300	5.5	3.4	0.58 B	0.95 U	1.1	0.36 J	N/A	5.1
Cadmium	mg/kg	980	0.71 B	0.68 B	1.2 B	0.46 B	5.5	1.5 U	N/A	0.61 B
Chromium	mg/kg	120,000	206	589	740 J	481 J	103 J	21.8 J	N/A	344
Chromium VI	mg/kg	6.3	1.2 UJ	1.1 UJ	0.48 J	1.1 J	1.1 UJ	0.28 B	N/A	1.1 UJ
Cobalt	mg/kg	350	1.4 J	2.5 J	21.8	6.1	11.4	4.3 B	N/A	0.43 J
Copper	mg/kg	47,000	18.5 J	61.9 J	143	25.5	110	13.5	N/A	14.3 J
Iron	mg/kg	820,000	27,100	110,000	79,300	34,900	40,800 J	13,200 J	N/A	86,300
Lead	mg/kg	800	12.9	14.8	110	40.3	4,910	11.6	N/A	12
Manganese	mg/kg	26,000	24,700	49,200	34,500	12,600	2,210	63.9	N/A	8,530
Mercury	mg/kg	350	0.0032 J-	0.11 UJ	0.035 J-	0.042 J-	0.21	0.022 J	N/A	0.1 UJ
Nickel	mg/kg	22,000	5.4 J	25.3 J	121	25.6	39.3 J	13.9 J	N/A	4.7 J
Selenium	mg/kg	5,800	3.7 U	3.8 U	3.6 U	3.8 U	2.8 B	4 U	N/A	4.1 U
Silver	mg/kg	5,800	2.8 U	1.8 B	2.7 U	2.8 U	2.6 U	3 U	N/A	3.1 U
Thallium	mg/kg	12	9.3 U	9.6 U	12.9 J	14.4 J	8.7 U	10 U	N/A	10.2 U
Vanadium	mg/kg	5,800	491	873	4,710 J	3,540 J	91.4	25.1	N/A	214
Zinc	mg/kg	350,000	59.2	23.9	373	78.8	7,290 J	30 J	N/A	55.1
Other										
Cyanide	mg/kg	150	3.4 J-	5.4 J-	3.8 J-	0.13 J-	1 J-	0.59 UJ	N/A	0.89 J-

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

Sub-Parcel B1-2
Summary of Inorganics Detected in Soil (NAPL Screening Locations)

Parameter	Units	PAL	B5-060-SB-5	B5-061-SB-1	B5-098-SB-1	B5-098-SB-4	B5-099-SB-1	B5-099-SB-4.5	B5-100-SB-1	B5-100-SB-5
Metals										
Aluminum	mg/kg	1,100,000	22,100	9,420	12,600	12,600	16,900	11,000	14,800	19,100
Antimony	mg/kg	470	3.3 UJ	2.6 UJ	3.3 UJ	2.7 UJ	2.9 UJ	2.8 UJ	2.5 J	2.9 UJ
Arsenic	mg/kg	3	21.8 J	2.2 U	14 J	12.3 J	11.7 J	15 J	7.4 J	22.6 J
Barium	mg/kg	220,000	335 J	41 J	230 J	245 J	313 J	128 J	163 J	273 J
Bervllium	mg/kg	2,300	1.1	0.87 U	1.3	0.66 J	1.6	0.59 J	2.2	1.1
Cadmium	mg/kg	980	16.8	0.55 B	13.9	4.2	7.4	3.5	7.6	3.9
Chromium	mg/kg	120,000	918	1,190	255	478	226	317	125	1,340
Chromium VI	mg/kg	6.3	1.1 UJ	2.2 J	1.1 UJ	0.43 J-	0.26 J-	0.24 J-	0.18 J-	1.2 UJ
Cobalt	mg/kg	350	41.5 J	4.3 U	19.4 J	20.4 J	13.2 J	16.2 J	11.7 J	46.3 J
Copper	mg/kg	47,000	382 J	22.7 J	241 J	202 J	154 J	187 J	180 J	417 J
Iron	mg/kg	820,000	121,000	167,000	141,000	100,000	98,000	71,100	75,900	99,600
Lead	mg/kg	800	2,320	7.1	682	569	490	873	441	449
Manganese	mg/kg	26,000	8,520	22,900	7,080	16,100	7,230	7,830	2,850	6,650
Mercury	mg/kg	350	0.19 J-	0.11 UJ	0.044 J-	0.052 J-	0.059 J-	0.15 J-	0.078 J-	0.24 J-
Nickel	mg/kg	22,000	229 J	11.8 J	44.6 J	53.9 J	47 J	61.6 J	25.3 J	200 J
Selenium	mg/kg	5,800	4.4 U	3.5 U	4.5 U	3.6 U	3.8 U	3.7 U	3.7 U	3.9 U
Silver	mg/kg	5,800	6.1	1.5 B	2.2 B	2.7 U	0.7 B	2.8 U	0.84 B	1.7 B
Thallium	mg/kg	12	11 U	8.7 U	11.1 U	9.1 U	9.5 U	9.4 U	9.3 U	9.7 U
Vanadium	mg/kg	5,800	181	729	396	2,530	439	1,970	296	123
Zinc	mg/kg	350,000	7,450	156	3,080	1,330	1,330	1,170	1,220	1,040
Other										
Cyanide	mg/kg	150	15.3 J-	0.077 J-	0.3 J-	0.46 J-	0.12 J-	0.51 J-	0.3 J-	2

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

Sub-Parcel B1-2
Summary of Inorganics Detected in Soil (NAPL Screening Locations)

Parameter	Units	PAL	B5-101-SB-1	B5-101-SB-5	B5-102-SB-1	B5-103-SB-1	B5-103-SB-4.5	B5-106-SB-1*	B5-106-SB-5*	B5-107-SB-1*
Metals	<u>u</u>									
Aluminum	mg/kg	1,100,000	5,330	15,100	14,800	9,000	8,870	29,400	42,500	26,200
Antimony	mg/kg	470	2.5 UJ	2.3 UJ	3.1 UJ	2.6 UJ	2.7 J	2.8 U	2.4 U	2.4 U
Arsenic	mg/kg	3	27.2	4.3	6.4 J	6.7 J	28.4 J	2.3 U	2.4	4.5
Barium	mg/kg	220,000	84.5	82.7	157 J	93.1 J	150 J	228	315	164
Beryllium	mg/kg	2,300	0.4 J	0.49 J	1.8	0.73 J	0.82 J	4.6	7	3.3
Cadmium	mg/kg	980	20.3	1.5 B	4	4.1	0.67 B	0.29 B	0.65 B	1.3 B
Chromium	mg/kg	120,000	424 J	531 J	381	363	92.9 J	9.8	19	46.5
Chromium VI	mg/kg	6.3	1.2 UJ	1.2 UJ	1.1 UJ	1.1 UJ	1.3 UJ	1.1 U	1.1 U	1.2 U
Cobalt	mg/kg	350	21.1	8.8	7.4 J	6 J	27.5 J	0.3 J	0.43 J	2.3 J
Copper	mg/kg	47,000	282	46.7	220 J	183 J	256 J	3.1 J	6.9	24.5
Iron	mg/kg	820,000	154,000 J	21,000 J	116,000	98,300	71,800	4,430	9,920	57,300
Lead	mg/kg	800	913	54.1	290	301	164	5.9	23.6	105
Manganese	mg/kg	26,000	5,960	2,610	9,380	8,110	3,200	2,110	3,320	2,270
Mercury	mg/kg	350	0.057 J	0.028 J	0.092 J-	0.045 J-	0.089 J-	0.1 U	0.11 U	0.12 U
Nickel	mg/kg	22,000	59.9 J	28.4 J	34.1 J	65.1 J	103 J	9.2 U	4.2 J	14.7
Selenium	mg/kg	5,800	3.3 U	3.1 U	4.2 U	3.5 U	3.6 U	3.7 U	4.9	3.1 U
Silver	mg/kg	5,800	3.3	2.3 U	1 B	0.87 B	0.81 B	2.8 U	2.4 U	2.4 U
Thallium	mg/kg	12	8.2 U	7.7 U	10.4 U	8.7 U	9 U	9.2 U	7.9 U	7.9 U
Vanadium	mg/kg	5,800	257	42.1	270	283	26.9	25	18.9	39.4
Zinc	mg/kg	350,000	7,400 J	195 J	1,240	979	214	19.7	189	829
Other										
Cyanide	mg/kg	150	0.19 J	1.2	4 J-	0.13 J-	0.76 UJ	0.37 J	0.59 J	0.32 J

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

Sub-Parcel B1-2 Summary of Inorganics Detected in Soil (NAPL Screening Locations)

		1				l		l	
Parameter	Units	PAL	B5-107-SB-6*	B5-109-SB-1*	B5-161-SB-1	B5-161-SB-4	B5-161-SB-10*	B5-178-SB-1	B5-178-SB-5
Metals									
Aluminum	mg/kg	1,100,000	44,400	31,600	7,900	8,610	N/A	13,200	16,900
Antimony	mg/kg	470	3.2 U	2.9 U	3.3 UJ	2.7 UJ	N/A	2.6 UJ	3 UJ
Arsenic	mg/kg	3	2.6 U	3.8	13.8 J	14.5 J	4.2	7.8 J	5.5 J
Barium	mg/kg	220,000	196	273	80.8 J	53.3 J	N/A	122 J	51.5 J
Beryllium	mg/kg	2,300	2.1	5.2	0.69 J	0.39 J	N/A	1.3	0.47 J
Cadmium	mg/kg	980	0.5 B	1.2 B	1.6 B	1.9 B	N/A	4.2	1.5 U
Chromium	mg/kg	120,000	93.1	38.3	146	122	N/A	523	23.8
Chromium VI	mg/kg	6.3	1.1 U	1.1 U	0.22 J-	1.1 UJ	N/A	1.1 UJ	1.2 UJ
Cobalt	mg/kg	350	2.7 J	2 J	13.1 J	16.8 J	N/A	8.2 J	4.1 J
Copper	mg/kg	47,000	19.3	16.8	167 J	130 J	N/A	166 J	10.6 J
Iron	mg/kg	820,000	5,000	33,000	134,000	105,000	N/A	134,000	23,100
Lead	mg/kg	800	17.7	59.5	91.3	247 J	N/A	212	9.9
Manganese	mg/kg	26,000	1,450	2,270	4,460	2,010	N/A	11,200	130
Mercury	mg/kg	350	0.1 U	0.11 U	0.013 J-	0.042 J-	N/A	0.027 J-	0.011 J-
Nickel	mg/kg	22,000	21.2	10	51.4 J	45.7 J	N/A	29.9 J	10.7 J
Selenium	mg/kg	5,800	5.9	3.1 J	4.4 U	3.6 U	N/A	3.4 U	4 U
Silver	mg/kg	5,800	3.2 U	2.9 U	1.4 B	1.2 B	N/A	2.6 U	3 U
Thallium	mg/kg	12	10.6 U	9.8 U	11 U	8.9 U	N/A	8.5 U	10.1 U
Vanadium	mg/kg	5,800	24.7	33.7	192	285	N/A	605	39.2
Zinc	mg/kg	350,000	29.1	371	222	365	N/A	768	29.5
Other									
Cyanide	mg/kg	150	1	0.31 J	0.1 J-	0.2 J-	N/A	0.091 J-	0.7 UJ

Values in red indicate an exceedance of the Project Action Limit (PAL)

- U: This analyte was not detected in the sample. The numeric value represents the sample quantitation/detection limit.
- UJ: This analyte was not detected in the sample. The actual quantitation/detection limit may be higher than reported.
- J: The positive result reported for this analyte is a quantitative estimate.
- J-: The positive result reported for this analyte is a quantitative estimate but may be biased low.
- B: This analyte was not detected substantially above the level of the associated method blank/preparation or field blank.

^{*}indicates non-validated data

APPENDIX C



Boring ID: B1-088-SB/PZ

(page 1 of 1)

Client : EnviroAnalytics Group

ARM Project No. : 150300M-3-3

Project Description : Sparrows Point - Parcel B5
Site Location : Sparrows Point, MD

ARM Representative : L. Glumac

Checked by : M. Replogle, E.I.T.
Drilling Company : Allied Drilling Co.

Driller : Rick Miller

Drilling Equipment : Geoprobe 7822DT

Soil Boring Installation Date : 03/08/2017
Piezometer Installation Date : 03/08/2017
Casing/Riser/Screen Type : PVC
Borehole Diameter : 2.25"
Riser/Screen Diameter : 1"

Northing (US ft) : 565873.59
Easting (US ft) : 1458722.56
0-Hr DTW : Dry
48-Hr DTW : 11.05' TOC
No LNAPL or DNAPL detected at 0 or 48 hours

							NO LIVAP E OF BIVAP E detected	
Depth (ft.)	% Recovery	PID Reading (PPM)	Sample No/Interval		DESCRIPTION	nscs	Π	REMARKS
0-		47.2 63.1	B1-088-SB-1	GRAVEL no cohes		ML	Bentonite seal	Piezometer installed after receipt of soil boring analytical
-	100	53.4 41.6		reddish y	AY, soft, very pale brown with yellow mottling, moist, moderate , cohesive	CL		results
5 -		69.8	B1-088-SB-5	medium	on-native SAND with GRAVEL, dense; black, brown, and strong lry, no plasticity, no cohesion	SW/GW	—Sand Pack	
- - 10—	50	136.3 283.6 2.6		black, we (8.8-10')	SAND, medium, medium dense, et, no plasticity, no cohesion CLAY, very soft, dark gray, wet, sticity, cohesive	SW	1" PVC Screen	Wet at 8' bgs Strong odor and sheen from 8-8.8' bgs
- - -	76	38.7 5.1 1.6 5.2		Piezome SILT gra	eter installation later date: (10-15') ding to CLAYEY SILT, soft, grayish noist to very moist, low plasticity,	ML	—Sand Pack —1" PVC Screen	
15 — - - -	90	-		CLAY, ve	eter installation later date: (15-25') ery firm, light gray and reddish nottling, slightly moist, moderate r, cohesive			
20 —		- - -				CL		
-	100	-						
25 -		-		End of bo	oring			

Boring terminated at 25' bgs due to water and piezometer installation.

TOC: Top of PVC casing DTW: Depth to water bgs: Below ground surface AMSL: Above mean sea level

P:\EnviroAnalytics Group\150300M EAG_Sparrows Point Area B\Documents\Parcel B5\BOR_PZLogs\2_bor\B1-088-SB-PZ.bor

Riser Stickup: 3.35' Riser: 0 - 5' bgs

Screen: 5 - 15' bgs [Slot Size: 0.010"] Sand Pack: 3 - 15' bgs [Grain Size: WG #2] Bentonite Seal: 0 - 3' bgs [Grain Size: 3/8" chips]



Boring ID: B5-097-SB/PZ

(page 1 of 1)

Client : EnviroAnalytics Group

ARM Project No. : 150300M-3-3

Project Description : Sparrows Point - Parcel B5 Site Location : Sparrows Point, MD

ARM Representative : L. Perrin

Checked by : M. Replogle, E.I.T.

Drilling Company : Green Services, Inc

Driller : Kevin Pumphrey
Drilling Equipment : Geoprobe 7822DT

Soil Boring Installation Date : 01/13/2016
Piezometer Installation Date : 04/27/2017
Casing/Riser/Screen Type : PVC
Borehole Diameter : 2.25"
Riser/Screen Diameter : 1"

Northing (US ft) : 564,799.57
Easting (US ft) : 1,459,395.96
0-Hr DTW : 7.02' TOC
48-Hr DTW : 7.00' TOC
No LNAPL or DNAPL detected at 0 or 48 hours

Deptn (it.)	% Recovery	PID Reading (PPM)	Sample No/Interval	DESCRIPTION	nscs	П	REMARKS
0-		-	B5-097-SB-1	(0-4') SLAG, GRAVEL-sized with medium SAND, loose, gray, dry, no plasticity, no cohesion		Bentonite seal	Piezometer installed after receipt of soil boring analytical results
-	60	2.7			GW	1" PVC Riser	
5-		3.3	B5-097-SB-4	(4-5') SLAG, GRAVEL-sized, loose, dark brown, wet, sticky black substance with odor	GW		Wet at 4' bgs 1-2 inch thick tar-like/sticky substance at 4.5'
J _		-		(5-6') SAND, light gray, wet, no plasticity, cohesive	sw		bgs
-		-		(6-7') SANDY CLAY, firm, very pale brown, medium plasticity, cohesive	CL	Sand Pack	
-	86	- - -		(7-10') SANDY CLAY, with trace GRAVEL, light gray, wet, high plasticity, cohesive	CL	— Sand Pack	
-		-		Piezometer installation later date: (10-14') SLAG, GRAVEL-sized, very loose, brown (10-12'), dark gray (12-14'), wet, no plasticity, no cohesion	GP	1" PVC Screen	
-	100	- -					
15—		-		Piezometer installation later date: (14-15') CLAY, soft, brown, moist, high plasticity, cohesive	CL		

Boring terminated at 15' bgs due to water and piezometer installation.

TOC: Top of PVC casing DTW: Depth to water

P:EnviroAnalytics Group\150300M EAG_Sparrows Point Area B\Documents\Parcel B5\BOR_PZLogs\\2_bon\B5-097-SB-PZ.bor

bgs: Below ground surface
AMSL: Above mean sea level

Riser Stickup: 3.40' Riser: 0 - 5' bgs

Screen: 5 - 15' bgs [Slot Size: 0.010"] Sand Pack: 3 - 15' bgs [Grain Size: WG #2]

Bentonite Seal: 0 - 2' bgs [Grain Size: granular (30-50 mesh)]



Boring ID: B5-098-SB/PZ

(page 1 of 1)

Client : EnviroAnalytics Group

ARM Project No. : 150300M-3-3

Project Description : Sparrows Point - Parcel B5 Site Location : Sparrows Point, MD

ARM Representative : L. Perrin

Checked by : M. Replogle, E.I.T.


Drilling Company : Green Services, Inc

Driller : Kevin Pumphrey

Drilling Equipment : Geoprobe 7822DT

Soil Boring Installation Date : 01/07/2016
Piezometer Installation Date : 01/07/2016
Casing/Riser/Screen Type : PVC
Borehole Diameter : 2.25"
Riser/Screen Diameter : 1"

Northing (US ft) : 565,447.79
Easting (US ft) : 1,458,171.90
0-Hr DTW : 7.70' TOC
48-Hr DTW : 7.69' TOC
No LNAPL or DNAPL detected at 0 or 48 hours

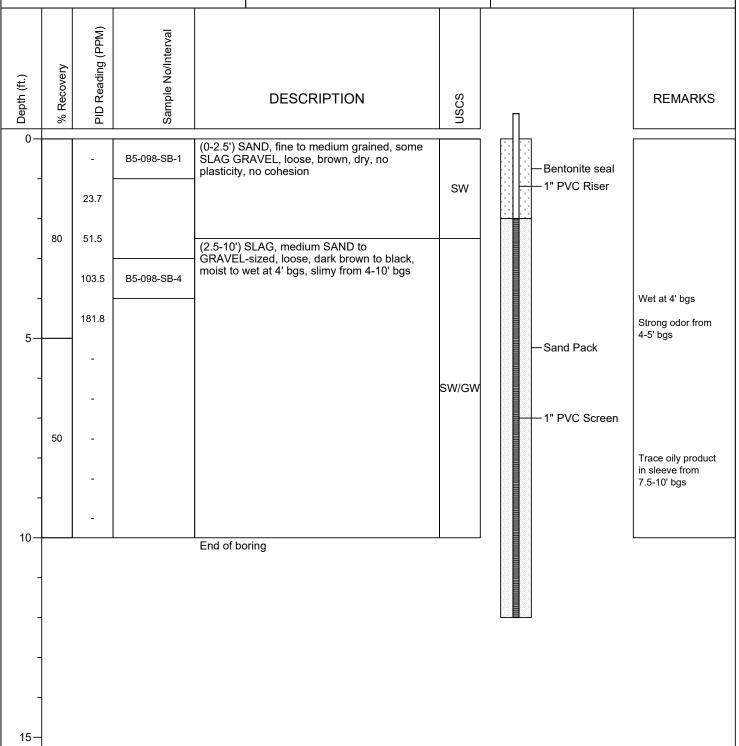

Boring logged to 10' bgs and extended to 12' bgs during piezometer installation.

TOC: Top of PVC casing DTW: Depth to water

P:\EnviroAnalytics Group\150300M EAG_Sparrows Point Area B\Documents\Parcel BS\BOR_PZ Logs\2_bon\B5-098-SB-PZ.bor

bgs: Below ground surface AMSL: Above mean sea level Riser Stickup: 2.75' Riser: 0 - 2' bgs

Screen: 2 - 12' bgs [Slot Size: 0.010"] Sand Pack: 2 - 12' bgs [Grain Size: WG #1]

Bentonite Seal: 0 - 2' bgs [Grain Size: granular (30-50 mesh)]



Boring ID: B5-099-SB/PZ

(page 1 of 1)

Client : EnviroAnalytics Group

ARM Project No. : 150300M-3-3

Project Description : Sparrows Point - Parcel B5 Site Location : Sparrows Point, MD

ARM Representative : L. Perrin

Checked by : M. Replogle, E.I.T.


Drilling Company : Green Services, Inc

Driller : Kevin Pumphrey

Drilling Equipment : Geoprobe 7822DT

Soil Boring Installation Date : 01/07/2016
Piezometer Installation Date : 01/07/2016
Casing/Riser/Screen Type : PVC
Borehole Diameter : 2.25"
Riser/Screen Diameter : 1"

Northing (US ft) : 565,446.56
Easting (US ft) : 1,458,162.28
0-Hr DTW : 7.41' TOC
48-Hr DTW : 7.36' TOC
No LNAPL or DNAPL detected at 0 or 48 hours

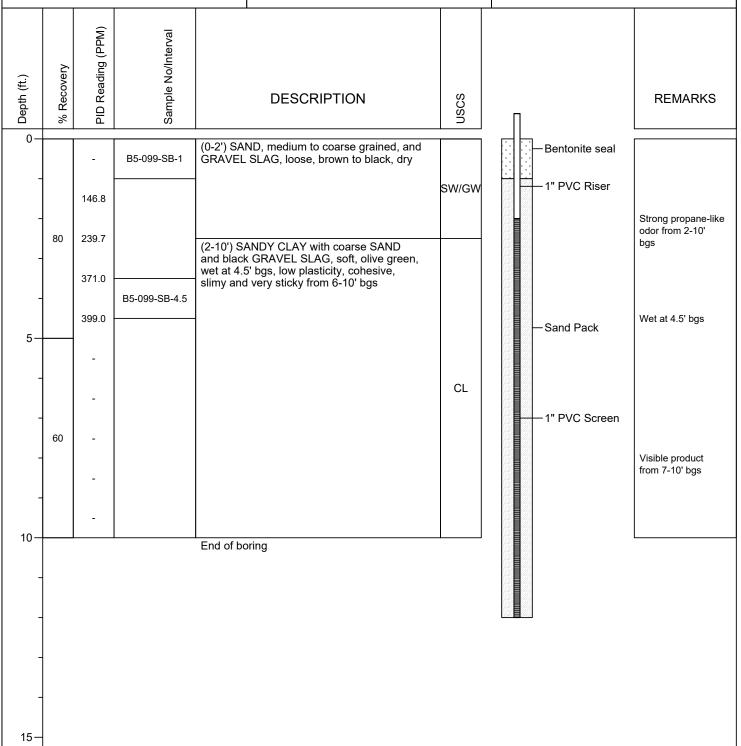

Boring logged to 10' bgs and extended to 12' bgs during piezometer installation.

TOC: Top of PVC casing DTW: Depth to water

P:\EnviroAnalytics Group\150300M EAG_Sparrows Point Area B\Documents\Parcel BS\BOR_PZ Logs\2_bon\B5-099-SB-PZ.bor

bgs: Below ground surface AMSL: Above mean sea level Riser Stickup: 2.46' Riser: 0 - 2' bgs

Screen: 2 - 12' bgs [Slot Size: 0.010"] Sand Pack: 1 - 12' bgs [Grain Size: WG #1]

Bentonite Seal: 0 - 1' bgs [Grain Size: granular (30-50 mesh)]



Boring ID: B5-103-SB/PZ

(page 1 of 1)

Client : EnviroAnalytics Group ARM Project No. : 150300M-3-3

Project Description : Sparrows Point - Parcel B5

Site Location : Sparrows Point, MD
ARM Representative : L. Perrin/ C. Berger, P.G.

Checked by : M. Replogle, E.I.T.

Drilling Company : GSI/ Allied Drilling Co.

Driller : Kevin Pumphrey/ Rick Miller

Drilling Equipment : Geoprobe 7822DT

Soil Boring Installation Date : 01/11/2016
Piezometer Installation Date : 04/24/2017
Casing/Riser/Screen Type : PVC
Borehole Diameter : 2.25"
Riser/Screen Diameter : 1"

Northing (US ft) : 565070.23

Easting (US ft) : 1458220.11
0-Hr DTW : 7.27' TOC
48-Hr DTW : 6.91' TOC

No LNAPL or DNAPL detected at 0 or 48 hours

			(page i	01 1)			No LNAPL or DNAPL detected	d at 0 or 48 hours
Depth (ft.)	% Recovery	PID Reading (PPM)	Sample No/Interval		DESCRIPTION	nscs	П	REMARKS
0-		-	B5-103-SB-1	cohesive		ML	Bentonite seal	Piezometer installed after
_		3.1		(0.3-3') S SLAG, Ic	SAND, fine to coarse, and GRAVEL pose, brown, dry	ML/GW	1" PVC Riser	receipt of soil boring analytical results
_	90	2.8		(3-5') SA	ND, medium to coarse, and			Black oily sheen
_		5.1 14.8	B5-103-SB-4.5	GRAVEL	SLAG, loose, black, wet, no	sw/gw		from 3-4.5' bgs Black, oily product
5-		0.5			ANDY CLAY, firm, very pale noist, medium plasticity, cohesive		— Sand Pack	with some sheen from 4.5-5' bgs
_	100	0.5				CL		
-		-					—Sand Pack	
10-		-			eter installation later date: (10-14')			
-		0.2		light brov	CLAY, soft, reddish brown with wn mottling, dry, medium plasticity,	CL		
_	100	0.3						
- 15—		0.4		SAND, fi	eter installation later date: (14-18') ine, light brown to reddish yellow,			Wet at 14' bgs
-		-		wet, no p	plasticity, no cohesion	SW		
_	100	-					POTON - COCKS	
-		-		CLAY, so	eter installation later date: (18-20') oft, olive gray with reddish yellow dry to moist, high plasticity,	CL		
20-	100	-		Piezome SILT with	eter installation later date: (20-21') h angular GRAVEL, dense,	ML/GW		
				vellowish	n brown, moist, low plasticity,			

Boring terminated at 21' bgs due to water and piezometer installation.

TOC: Top of PVC casing DTW: Depth to water bgs: Below ground surface AMSL: Above mean sea level Riser Stickup: 3.08' Riser: 0 - 4' bgs

Screen: 4 - 21' bgs [Slot Size: 0.010"] Sand Pack: 2 - 21' bgs [Grain Size: WG #2]

Bentonite Seal: 0 - 2' bgs [Grain Size: granular (30-50 mesh)]

8 P:\EnviroAnalytics Group\150300M EAG_Sparrows Point Area B\Documents\Parcel B5\BOR_PZ Logs\2_bon\B5-103-SB-PZ.bor



Boring ID: B5-161-SB/PZ

(page 1 of 1)

Client : EnviroAnalytics Group

ARM Project No. : 150300M-3-3

Project Description : Sparrows Point - Parcel B5 Site Location : Sparrows Point, MD

ARM Representative : L. Glumac


Checked by : M. Replogle, E.I.T. Drilling Company : Allied Drilling Co.

Driller : Rick Miller

Drilling Equipment : Geoprobe 7822DT

Soil Boring Installation Date : 01/07/2016
Piezometer Installation Date : 04/26/2017
Casing/Riser/Screen Type : PVC
Borehole Diameter : 2.25"
Riser/Screen Diameter : 1"

Northing (US ft) : 565264.01
Easting (US ft) : 1458124.37
0-Hr DTW : 9.11' TOC
48-Hr DTW : 8.45' TOC
No LNAPL or DNAPL detected at 0 or 48 hours

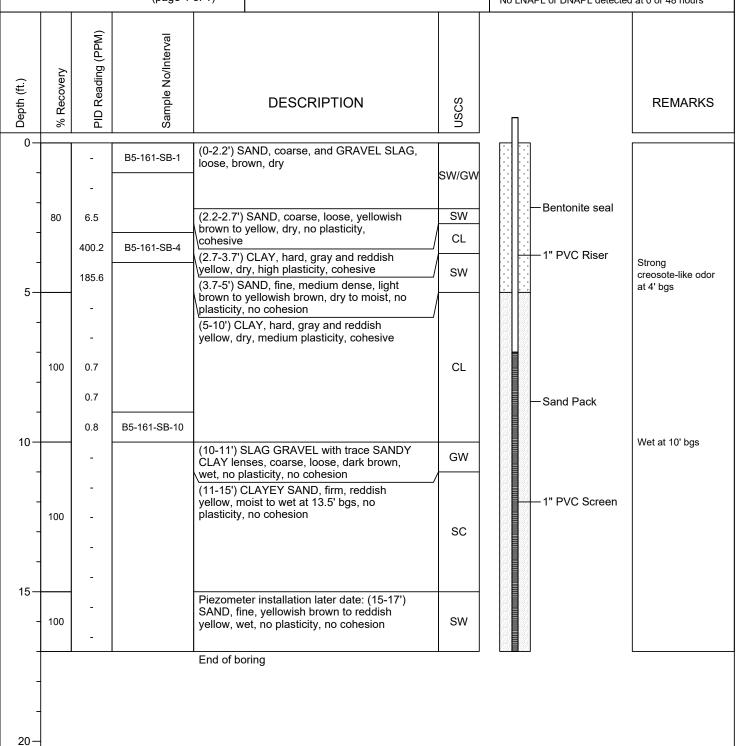

Boring terminated at 17' bgs due to water and piezometer installation.

TOC: Top of PVC casing DTW: Depth to water bgs: Below ground surface

AMSL: Above mean sea level

P:\EnviroAnalytics Group\150300M EAG_Sparrows Point Area B\Documents\Parcel B\$\BOR_PZ Logs\2_bon\B5-161-SB-PZ.boi

Riser Stickup: 3.21' Riser: 0 - 7' bgs

Screen: 7 - 17' bgs [Slot Size: 0.010"]
Sand Pack: 5 - 17' bgs [Grain Size: WG #2]

Bentonite Seal: 0 - 5' bgs [Grain Size: granular (30-50 mesh)]

APPENDIX D

Construction Worker Soil Screening Levels Maximum Allowable Work Day Exposure Calculation Spreadsheet - Sub-Parcel B1-2

Description	Variable	Value
Days worked per week	DW	5
Exposure duration (yr)	ED	1
Hours worked per day	ET	8
A/constant (unitless) - particulate emission factor	Aconst	12.9351
B/constant (unitless) - particulate emission factor	Bconst	5.7383
C/constant (unitless) - particulate emission factor	Cconst	71.7711
Dispersion correction factor (unitless)	FD	0.185
Days per year with at least .01" precipitation	Р	130
Target hazard quotient (unitless)	THQ	1
Body weight (kg)	BW	80
Averaging time - noncancer (yr)	ATnc	1
Soil ingestion rate (mg/d)	IR	330
Skin-soil adherence factor (mg/cm2)	AF	0.3
Skin surface exposed (cm2)	SA	3300
Event frequency (ev/day)	EV	1
Target cancer risk (unitless)	TR	01E-06
Averaging time - cancer (yr)	ATc	70
A/constant (unitless) - volatilization	Aconstv	2.4538
B/constant (unitless) - volatilization	Bconstv	17.566
C/constant (unitless) - volatilization	Cconstv	189.0426
Dry soil bulk density (kg/L)	Pb	1.5
Average source depth (m)	ds	3
Soil particle density (g/cm3)	Ps	2.65
Total soil porosity	Lpore/Lsoil	0.43
Air-filled soil porosity	Lair/Lsoil	0.28

Area of site (ac) 61.2 Overall duration of construction (wk/yr) EW 16 Exposure frequency (day/yr) 80 Cars per day CaT Tons per car Trucks per day Tru Tons per truck 20 Mean vehicle weight (tons) Derivation of dispersion factor - particulate Q/Csr 13.4 emission factor (g/m2-s per kg/m3) 2,688 Overall duration of construction (hr) 2,304,000 Overall duration of traffic (s) Surface area (m2) 247,668 Length (m) 498 Distance traveled (km) ΣVΚΤ 398 Particulate emission factor (m3/kg) PEFsc 172,714,593 Derivation of dispersion factor - volatilization Q/Csa 6.39 (g/m2-s per kg/m3) Total time of construction (s) 2,304,000 Tcv



→ EU -OEn

Chemical	RfD & RfC Sources	^Ingestion SF (mg/kg-day) ⁻¹	^Inhalation Unit Risk (ug/m³) ⁻¹	^Subchronic RfD (mg/kg-day)	^Subchronic RfC (mg/m³)	^GIABS	Dermally Adjusted RfD (mg/kg-day)	^ABS	^RBA	*Dia	*Diw	*Henry's Law Constant (unitless)	*Kd	*Koc	DA	Volatilization Factor - Unlimited Reservoir (m³/kg)	Carcinogenic Ingestion/ Dermal SL (SLing/der)	Carcinogenic Inhalation SL (SLinh)	Carcinogenic SL (mg/kg)	Non- Carcinogenic Ingestion/ Dermal SL (SLing/der)	Non- Carcinogenic Inhalation SL (SLinh)	Non- Carcinogenic SL (mg/kg)
Antimony	1	-	-	4.00E-04	-	0.15	6.00E-05	0.01	1			-	4.50E+01							369		369
Arsenic, Inorganic	I/C	1.50E+00	4.30E-03	3.00E-04	1.50E-05	1	3.00E-04	0.03	0.6			-	2.90E+01				47.4	38,484	47.3	304	35,460	302
Chromium(VI)	A/C/I	5.00E-01	8.40E-02	5.00E-03	3.00E-04	0.025	1.25E-04	0.01	1			-	1.90E+01				70.4	1,970	68.0	2,514	709,209	2,505
Cobalt	Р	-	9.00E-03	3.00E-03	2.00E-05	1	3.00E-03	0.01	1			-	4.50E+01					18,387	18,387	3,222	47,281	3,016
Iron	Р	-	-	7.00E-01	-	1	7.00E-01	0.01	1			-	2.50E+01							751,692		751,692
Manganese (Non-diet)	1	-	-	2.40E-02	5.00E-05	0.04	9.60E-04	0.01	1			-	6.50E+01							15,169	118,202	13,444
Nickel Soluble Salts	I/A/C	-	2.60E-04	2.00E-02	2.00E-04	0.04	8.00E-04	0.01	1			-	6.50E+01					636,470	636,470	12,641	472,806	12,312
Vanadium and Compounds	Α	-	-	1.00E-02	1.00E-04	0.026	2.60E-04	0.01	1			-	1.00E+03							5,135	236,403	5,026
PCB Total	1	2.00E+00	5.71E-04	-	-	1		0.14	1	2.40E-02	6.30E-06	1.70E-02	4.68E+02	7.80E+04	4.66E-08	1.43E+4	27.3	24.1	12.8			
Aroclor 1254	A/I	2.00E+00	5.71E-04	3.00E-05	-	1	3.00E-05	0.14	1	2.40E-02	6.10E-06	1.16E-02	7.80E+02	1.30E+05	1.91E-08	2.24E+4	27.3	37.6	NE	23.4		23.4
Benz[a]anthracene	1	1.00E-01	6.00E-05	-	-	1		0.13	1	2.60E-02	6.70E-06	4.91E-04	1.08E+03	1.80E+05	6.71E-10	1.20E+5	557	1,907	431			
Benzo[a]pyrene	I	1.00E+00	6.00E-04	3.00E-04	2.00E-06	1	3.00E-04	0.13	1	4.80E-02	5.60E-06	1.87E-05	3.54E+03	5.90E+05	2.37E-11	6.37E+5	55.7	1,013	52.8	239	17.4	16.2
Benzo[b]fluoranthene	1	1.00E-01	6.00E-05	-	-	1		0.13	1	4.80E-02	5.60E-06	2.69E-05	3.60E+03	6.00E+05	2.91E-11	5.74E+5	557	9,134	525			
Dibenz[a,h]anthracene	I	1.00E+00	6.00E-04	-	-	1		0.13	1	4.50E-02	5.20E-06	5.76E-06	1.14E+04	1.90E+06	4.13E-12	1.52E+6	55.7	275,804	55.7			
Naphthalene	C/I/A	-	3.40E-05	6.00E-01	3.00E-03	1	6.00E-01	0.13	1	6.00E-02	8.40E-06	1.80E-02	9.00E+00	1.50E+03	6.35E-06	1.23E+3		34.6	34.6	477.436	50.5	50.5

^{*}chemical specific parameters found in Chemical Specific Parameters Spreadsheet at https://www.epa.gov/risk/regional-screening-levels-rsls

NE = Not Evaluated. Aroclor 1254 was included for non-cancer hazard only. The carcinogenic risk is evaluated with total PCBs.

[^]chemical specific parameters found in Unpaved Road Traffic calculator at https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search

I: chemical specific parameters found in the IRIS at https://www.epa.gov/iris

C: chemical specific parameters found in Cal EPA at https://www.dtsc.ca.gov/AssessingRisk

A: chemical specific parameters found in Agency for Toxic Substances and Disease Registry Minimal Risk Levels (MRLs) at https://www.atsdr.cdc.gov/mrls/pdfs/atsdr_mrls.pdf

P: chemical specific parameters found in the Database of EPA PPRTVs at https://hhpprtv.ornl.gov/quickview/pprtv.php

Area of site (ac) 45.1 Overall duration of construction (wk/yr) EW 17 Exposure frequency (day/yr) 85 Cars per day CaT Tons per car Trucks per day Tru Tons per truck 20 Mean vehicle weight (tons) Derivation of dispersion factor - particulate Q/Csr 13.6 emission factor (g/m2-s per kg/m3) 2,856 Overall duration of construction (hr) 2,448,000 Overall duration of traffic (s) Surface area (m2) 182,513 Length (m) 427 Distance traveled (km) ΣVΚΤ 363 Particulate emission factor (m3/kg) PEFsc 150,523,987 Derivation of dispersion factor - volatilization Q/Csa 6.68 (g/m2-s per kg/m3) Total time of construction (s) 2,448,000 Tcv



→ EU2

Chemical	RfD & RfC Sources	^Ingestion SF (mg/kg-day) ⁻¹	^Inhalation Unit Risk (ug/m³) ⁻¹	^Subchronic RfD (mg/kg-day)	^Subchronic RfC (mg/m³)	^GIABS	Dermally Adjusted RfD (mg/kg-day)	^ABS	^RBA	*Dia	*Diw	*Henry's Law Constant (unitless)	*Kd	*Koc	DA	Volatilization Factor - Unlimited Reservoir (m³/kg)	Carcinogenic Ingestion/ Dermal SL (SLing/der)	Carcinogenic Inhalation SL (SLinh)	Carcinogenic SL (mg/kg)	Non- Carcinogenic Ingestion/ Dermal SL (SLing/der)	Non- Carcinogenic Inhalation SL (SLinh)	Non- Carcinogenic SL (mg/kg)
Antimony	1	-	-	4.00E-04	-	0.15	6.00E-05	0.01	1			-	4.50E+01							347		347
Arsenic, Inorganic	I/C	1.50E+00	4.30E-03	3.00E-04	1.50E-05	1	3.00E-04	0.03	0.6			-	2.90E+01				44.6	31,567	44.5	287	29,087	284
Chromium(VI)	A/C/I	5.00E-01	8.40E-02	5.00E-03	3.00E-04	0.025	1.25E-04	0.01	1			-	1.90E+01				66.2	1,616	63.6	2,366	581,731	2,356
Cobalt	Р	-	9.00E-03	3.00E-03	2.00E-05	1	3.00E-03	0.01	1			-	4.50E+01					15,082	15,082	3,032	38,782	2,812
Iron	Р	-	-	7.00E-01	-	1	7.00E-01	0.01	1			-	2.50E+01							707,475		707,475
Manganese (Non-diet)	1	-	-	2.40E-02	5.00E-05	0.04	9.60E-04	0.01	1			-	6.50E+01							14,277	96,955	12,444
Nickel Soluble Salts	I/A/C	-	2.60E-04	2.00E-02	2.00E-04	0.04	8.00E-04	0.01	1			-	6.50E+01					522,066	522,066	11,897	387,821	11,543
Vanadium and Compounds	Α	-	-	1.00E-02	1.00E-04	0.026	2.60E-04	0.01	1			-	1.00E+03							4,833	193,910	4,716
PCB Total	I	2.00E+00	5.71E-04	-	-	1		0.14	1	2.40E-02	6.30E-06	1.70E-02	4.68E+02	7.80E+04	4.66E-08	1.54E+4	25.7	24.4	12.5			
Aroclor 1254	A/I	2.00E+00	5.71E-04	3.00E-05	-	1	3.00E-05	0.14	1	2.40E-02	6.10E-06	1.16E-02	7.80E+02	1.30E+05	1.91E-08	2.41E+4	25.7	38.1	NE	22.0		22.0
Benz[a]anthracene	1	1.00E-01	6.00E-05	-	-	1		0.13	1	2.60E-02	6.70E-06	4.91E-04	1.08E+03	1.80E+05	6.71E-10	1.29E+5	524	1,933	412			
Benzo[a]pyrene	1	1.00E+00	6.00E-04	3.00E-04	2.00E-06	1	3.00E-04	0.13	1	4.80E-02	5.60E-06	1.87E-05	3.54E+03	5.90E+05	2.37E-11	6.86E+5	52.4	1,026	49.9	225	17.6	16.3
Benzo[b]fluoranthene	1	1.00E-01	6.00E-05	-	-	1		0.13	1	4.80E-02	5.60E-06	2.69E-05	3.60E+03	6.00E+05	2.91E-11	6.18E+5	524	9,252	496			
Dibenz[a,h]anthracene	1	1.00E+00	6.00E-04	-	-	1		0.13	1	4.50E-02	5.20E-06	5.76E-06	1.14E+04	1.90E+06	4.13E-12	1.64E+6	52.4	226,229	52.4			
Naphthalene	C/I/A	-	3.40E-05	6.00E-01	3.00E-03	1	6.00E-01	0.13	1	6.00E-02	8.40E-06	1.80E-02	9.00E+00	1.50E+03	6.35E-06	1.32E+3		35.1	35.1	449,352	51.2	51.2

^{*}chemical specific parameters found in Chemical Specific Parameters Spreadsheet at https://www.epa.gov/risk/regional-screening-levels-rsls

NE = Not Evaluated. Aroclor 1254 was included for non-cancer hazard only. The carcinogenic risk is evaluated with total PCBs.

[^]chemical specific parameters found in Unpaved Road Traffic calculator at https://epa-prgs.ornl.gov/cgi-bin/chemicals/csl_search


I: chemical specific parameters found in the IRIS at $\protect\ensuremath{\mathsf{https://www.epa.gov/iris}}$

C: chemical specific parameters found in Cal EPA at https://www.dtsc.ca.gov/AssessingRisk

A: chemical specific parameters found in Agency for Toxic Substances and Disease Registry Minimal Risk Levels (MRLs) at https://www.atsdr.cdc.gov/mrls/pdfs/atsdr_mrls.pdf

P: chemical specific parameters found in the Database of EPA PPRTVs at https://hhpprtv.ornl.gov/quickview/pprtv.php

APPENDIX E

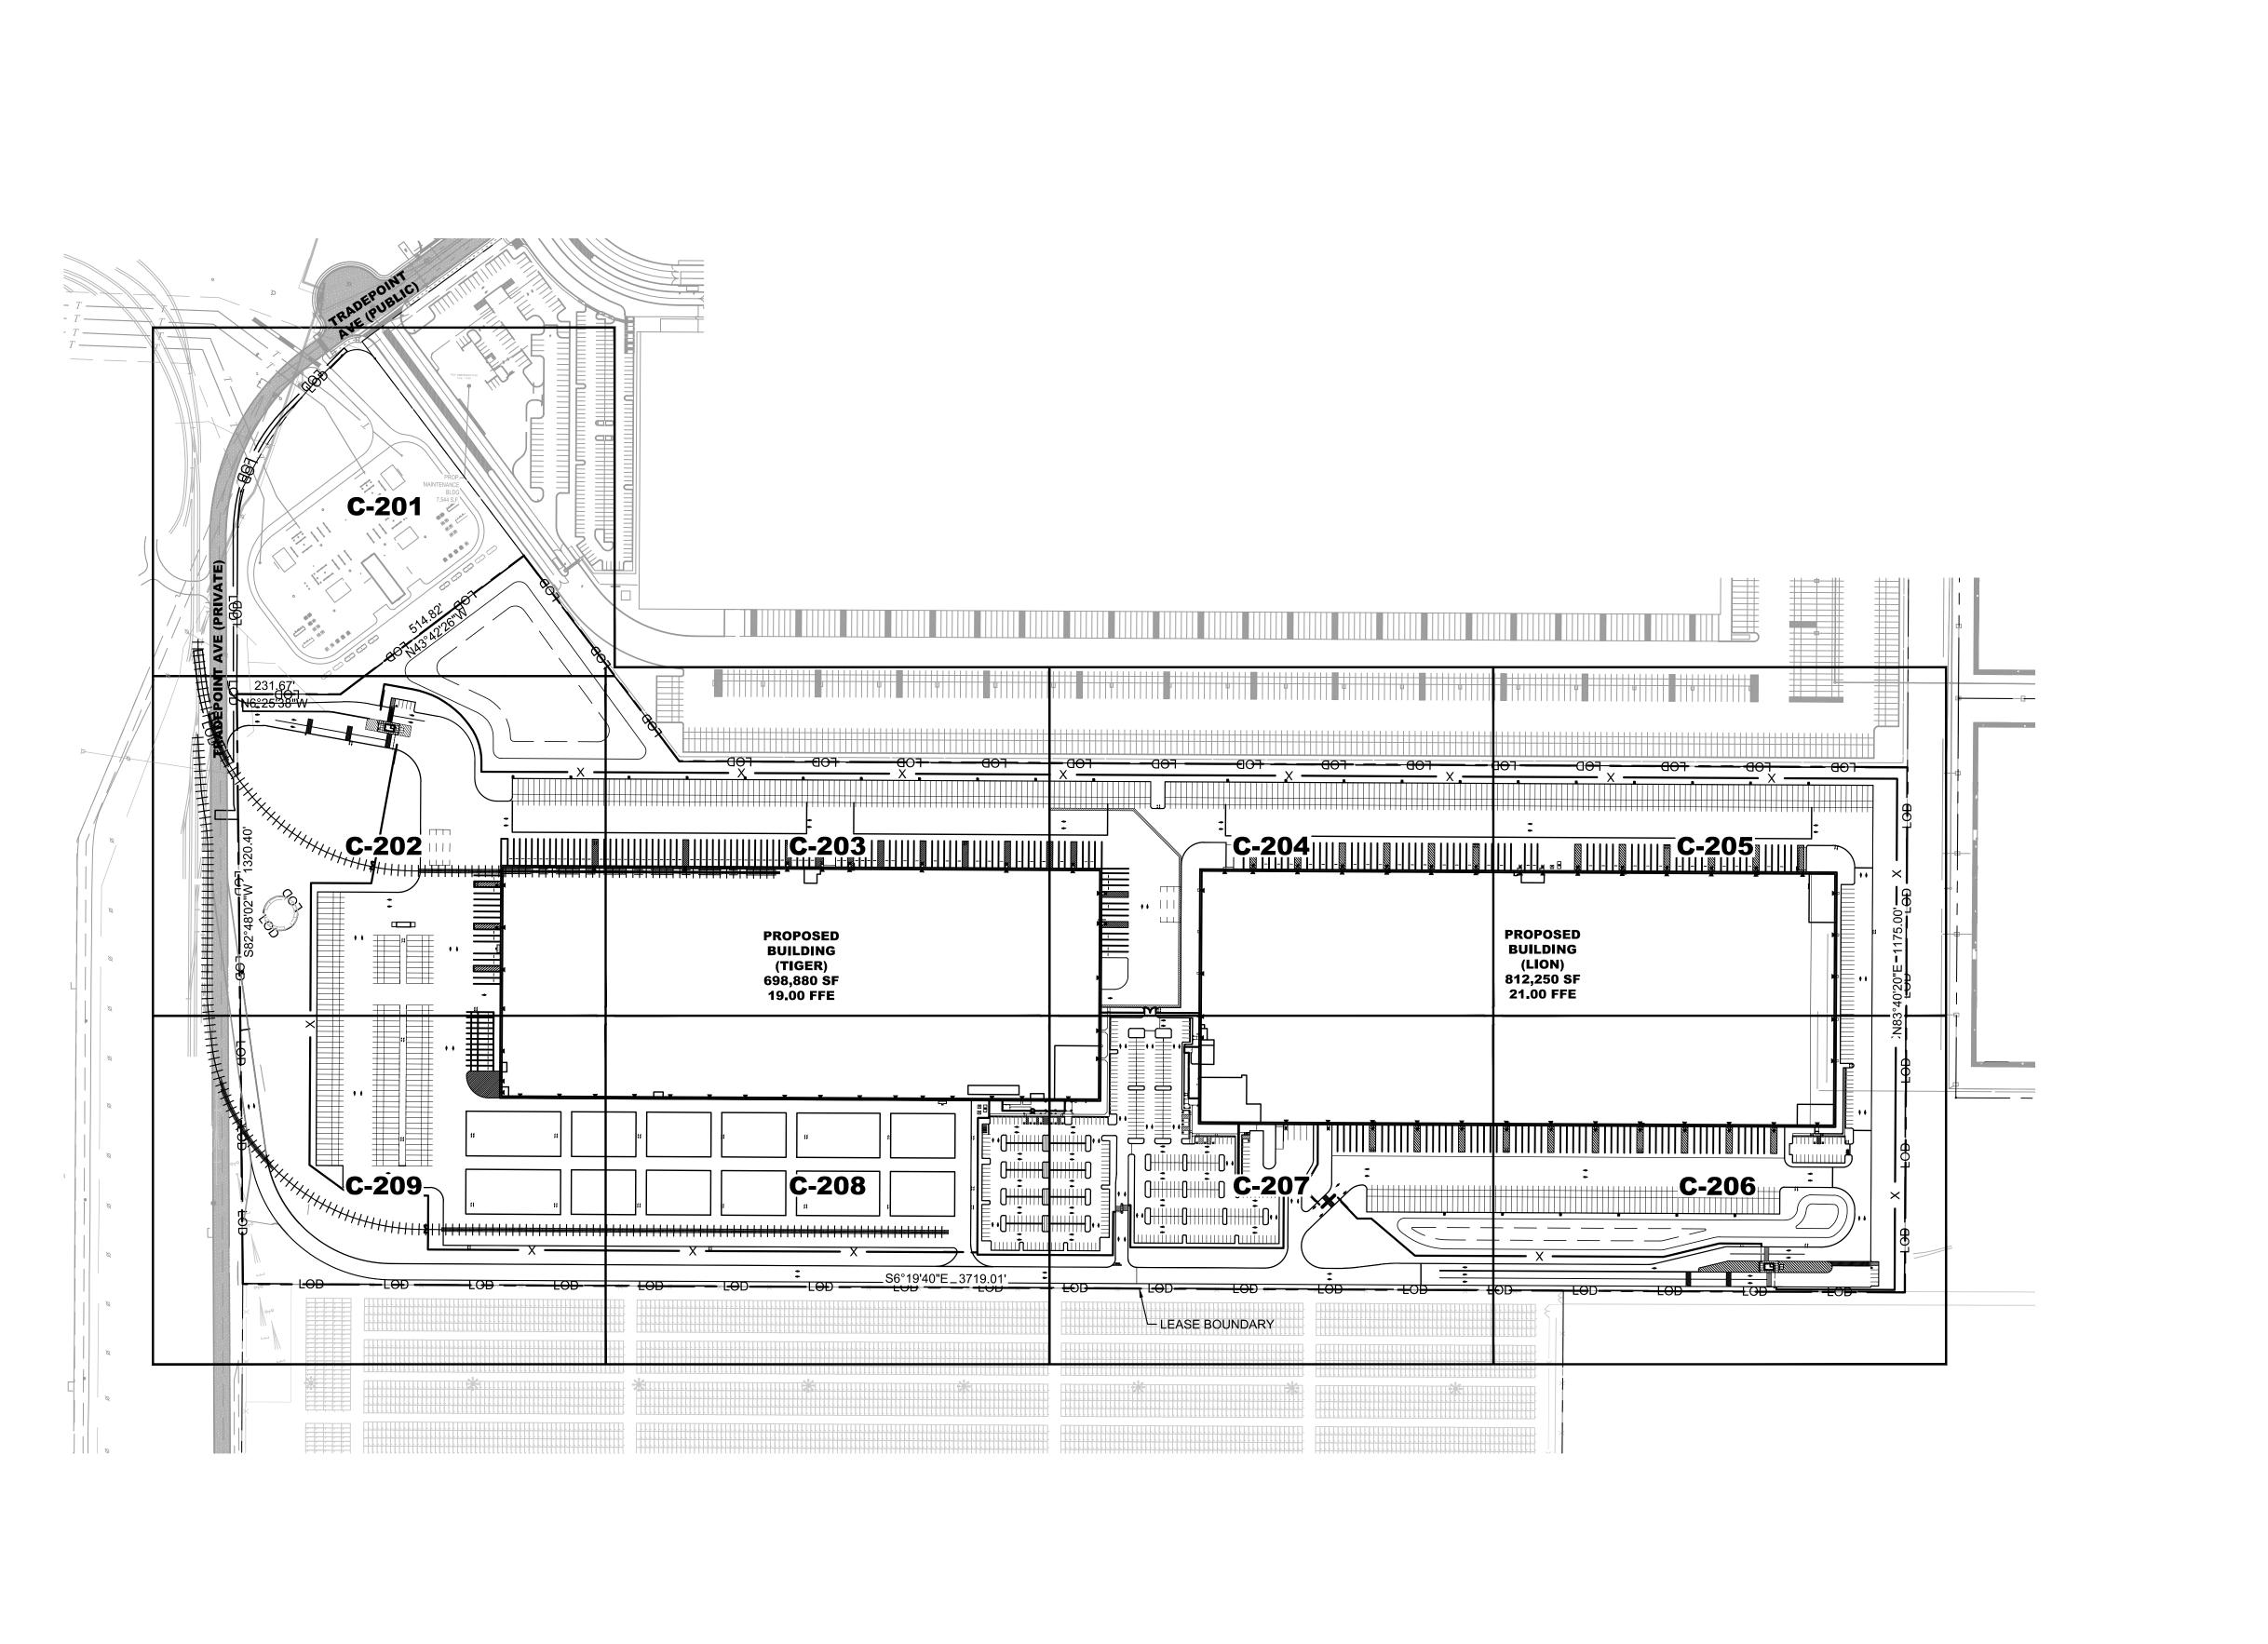

BEAR CREEK 695 PAI # -DRC #102318B -TAX MAP 111 GRID 14 PARCEL 318 ELECTION DISTRICT: 15TH
COUNCILMANIC DISTRICT: 7TH VICINITY MAP
SCALE: 1" = 4000'

/≫Horn Kimley

THIS PLAN IS SEALED & CERTIFIED AS BEING IN ACCORDANCE WITH THE APPROVED DRC PLAN

PROFESSIONAL CERTIFICATION: I HEREBY
CERTIFY THAT THESE DOCUMENTS WERE
PREPARED OR APPROVED BY ME, AND THAT
AM A DULY LICENSED PROFESSIONAL
ENGINEER UNDER THE LAWS OF THE STATE
OF MARYLAND.
LICENSE NO. 44113
EXPIRATION DATE 06/10/2019


SITE OVERALL

ATLANTIC


TIGER PREPARED TRADEPOINT

OVERALL SITE PLAN SCALE: 1" = 200'





- SURVEY CONTROL WAS ESTABLISHED BASED ON BALTIMORE COUNTY BENCHMARKS IN NAD 83 (FT) AND NAVD 88:
- 1. AZ-1: BRASS CAP ALONG RIVERSIDE DRIVE NEAR BEAR CREEK NORTHING: 570211.459 EASTING: 1456157.592 ELEVATION: 11.68
- 2. GIS-1: BRASS DISK ALONG BEAR CREEK NORTHING: 568515.114 EASTING: 1455887.319 ELEVATION: 6.72
- 3. GIS-1A: NAIL ALONG RAILROAD TRACKS NORTHING: 562923.390 EASTING: 1455314.564 ELEVATION: 10.99
- 4. GIS-2: BRASS DISK ALONG WRARF ROAD NORTHING: 565182.390 EASTING: 1464480.716 **ELEVATION: 9.95**

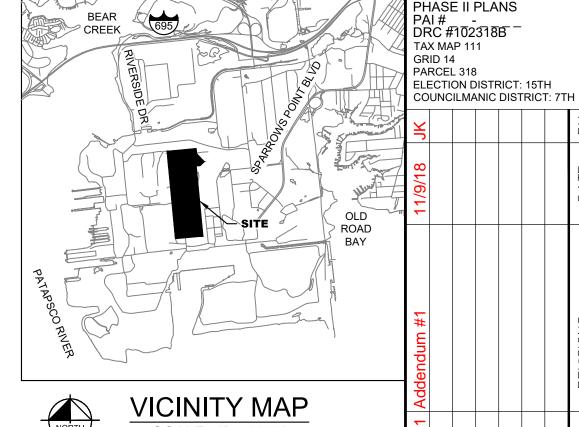


orn

THIS PLAN IS SEALED & CERTIFIED AS BEING IN ACCORDANCE WITH THE APPROVED DRC PLAN

PROFESSIONAL CERTIFICATION: I HEREBY CERTIFY THAT THESE DOCUMENTS WERE REPARED OR APPROVED BY ME, AND TH AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATI

Ш



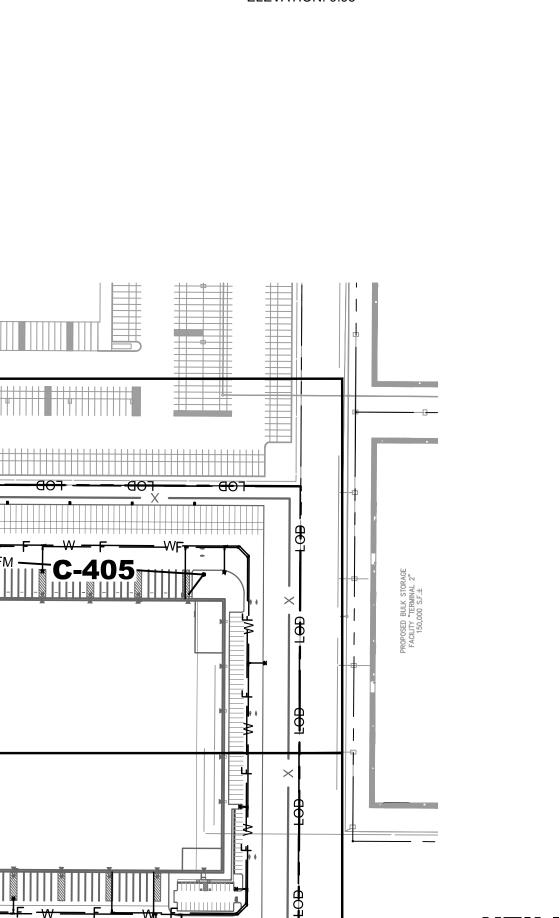

UTILITY NOTES:

- 1. APPROXIMATE LIMITS OF DISTURBANCE: 106.40 AC.
- 2. ALL FILL MATERIAL IS TO BE IN PLACE, AND COMPACTED BEFORE INSTALLATION OF PROPOSED UTILITIES.
- 3. LINES UNDERGROUND SHALL BE INSTALLED, INSPECTED, AND APPROVED BEFORE BACKFILLING.
- 4. TOPS OF MANHOLES SHALL BE RAISED AS NECESSARY TO BE FLUSH WITH PROPOSED PAVEMENT ELEVATIONS, AND TO BE ONE FOOT ABOVE FINISHED GROUND ELEVATIONS, IN GREEN AREAS WITH WATERTIGHT LIDS.
- 5. EXISTING UTILITIES SHALL BE VERIFIED IN THE FIELD PRIOR TO INSTALLATION OF ANY NEW LINES.
- 6. REFER TO INTERIOR PLUMBING DRAWINGS FOR TIE-IN OF ALL UTILITES.
- 7. CONTRACTOR IS RESPONSIBLE FOR COMPLYING TO THE SPECIFICATIONS OF BALTIMORE COUNTY AND THE STATE OF MARYLAND WITH REGARDS TO MATERIALS AND INSTALLATION OF WATER AND SEWER LINES.
- 8. CONTRACTOR IS RESPONSIBLE FOR ALL NECESSARY INSPECTIONS AND/OR CERTIFICATIONS REQUIRED BY CODES AND/OR UTILITY SERVICE COMPANIES.
- 9. CONTRACTOR SHALL COORDINATE WITH ALL UTILITY COMPANIES FOR INSTALLATION REQUIREMENTS AND SPECIFICATIONS.
- 10. CONTRACTOR SHALL REFERENCE ARCHITECTURE / MEP PLANS FOR SITE LIGHTING AND ELECTRICAL PLAN.
- 11. ALL TIME OF CONCENTRATION PATHS FOR STORM DRAIN INLETS ARE ASSUMED TO BE A MINIMUM 0.1 HOURS.



C-404


C-407

E 1458140



C-401

, **C-402**





SHEET NUMBER C-400

VICINITY MAP SCALE: 1" = 4000'

E

THIS PLAN IS SEALED & CERTIFIED AS BEING IN

ACCORDANCE WITH THE APPROVED DRC PLAN

EPARED OR APPROVED BY ME, AND THA I A DULY LICENSED PROFESSIONAL IGINEER UNDER THE LAWS OF THE STAT

> Ž Q


> > Ω


POINT

2

GRADING NOTES:

- 1. APPROXIMATE LIMITS OF DISTURBANCE: 106.40 AC
- 2. CONTRACTOR TO FIELD VERIFY THE LOCATIONS AND ELEVATIONS OR EXISTING UTILITIES, TOPOGRAPHIC FEATURES, EXISTING AND PROPOSED SITE CONDITIONS AND DIMENSIONS PRIOR TO THE START OF SITE GRADING. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE PROJECT ENGINEER OF ANY DISCREPANCIES OR VARIATIONS.
- 3. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL HORIZONTAL AND VERTICAL CONTROL.
- 4. REFER TO THE UTILITY PLAN FOR STORM DRAIN AND SANITARY SEWER PROFILES AND STRUCTURE SCHEDULE.
- 5. CONTRACTOR IS RESPONSIBLE FOR CONSTRUCTION OF PAVEMENTS AND CURB AND GUTTER WITH SMOOTH UNIFORM SLOPES TO PROVIDE POSITIVE DRAINAGE.
- 6. ALL EXCESS MATERIAL, BITUMINOUS SURFACING, CONCRETE ITEMS, ANY ABANDONDED UTILITY ITEMS, AND OTHER UNSTABLE MATERIALS SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF OFF THE CONSTRUCTION SITE.
- 7. UPON COMPLETION OF EXCAVATION, FILLING, AND UTILITY INSTALLATION, CONTRACTOR SHALL RESTORE ALL PARKING AREAS AND DISTURBED AREAS ON-SITE.
- 8. ALL SPOT ELEVATIONS ARE TO FINISHED GRADE, UNLESS OTHERWISE NOTED.
- 9. GRADING FOR ALL SIDEWALKS AND ACCESSIBLE ROUTES INCLUDING CROSSING DRIVEWAYS SHALL CONFORM TO CURRENT ADA STATE/NATIONAL STANDARDS. SLOPES SHALL NOT EXCEED 5% LONGTUDINALLY OR EXCEED 2% CROSS SLOPE. SIDEWALK ACCESS TO EXTERNAL BUILDING DOORS SHALL BE ADA COMPLIANT. CONTRACTOR SHALL NOTIFY ENGINEER IMMEDIATELY IF ADA CRITERIA CANNOT BE MET IN ANY LOCATION.
- 10. STORMWATER FACILITIES AND THEIR CONTRIBUTING DRAINAGE AREA IS TO BE FULLY STABILIZED PRIOR TO BEING PUT ON-LINE. CONSTRUCTION STORMWATER SHALL BE DIVERTED AROUND BMPS UNTIL CONTRIBUTING DRAINAGE AREA IS PERMANENTLY STABILIZED AND BMP IS ON-LINE.
- 11. CONTRACTOR SHALL ENSURE THERE IS POSITIVE DRAINAGE FROM THE PROPOSED BUILDING AND NO PONDING IN PAVED AREAS AND SHALL NOTIFY THE PROJECT ENGINEER IF ANY GRADING DISCREPANCIES ARE FOUND IN THE EXISTING AND PROPOSED GRADES PRIOR TO PLACEMENT OF PAVEMENT OR UTILITIES.
- 12. CONTRACTOR SHALL PROTECT ALL MANHOLE COVERS, VALVE COVERS, VAULT LIDS, POWER POLES, GUY WIRES, AND TELEPHONE BOXES THAT ARE TO REMAIN IN PLACE AND UNDISTURBED DURING CONSTRUCTION.
- 13.BACKFILL FOR UTILITY LINES SHALL BE PLACED PER DETAILS, STANDARDS, AND SPECIFICATIONS SO THAT THE UTILITY WILL BE STABLE. WHERE UTILITY LINES CROSS THE PARKING LOT, THE TOP 6 INCHES SHALL BE COMPACTED SIMILARLY TO THE REMAINDER OF THE LOT. UTILITY DITCHES SHALL BE VISUALLY INSPECTED DURING THE EXCAVATION PROCESS TO ENSURE THAT UNDESIRABLE FILL IS NOT USED.
- 14. CONTRACTOR IS RESPONSIBLE FOR THE REMOVAL AND REPLACEMENT OF 4" OF TOPSOIL AT THE COMPLETION OF WORK.
- 15. AFTER PLACEMENT OF SUBGRADE AND PRIOR TO PLACEMENT OF PAVEMENT. THE CONTRACTOR SHALL TEST AND OBSERVE PAVEMENT AREAS FOR EVIDENCE OF PONDING. ALL AREAS SHALL ADEQUATELEY DRAIN TOWARDS THE INTENDED STRUCTURE TO CONVEY STORM RUNOFF. CONTRACTOR SHALL IMMEDIATELY NOTIFY OWNER AND ENGINEER IF ANY DISCREPANCIES ARE FOUND.
- 16. WHERE EXISTING PAVEMENT IS INDICATED TO BE REMOVED AND REPLACED, THE CONTRACTOR SHALL SAW CUT FULL DEPTH FOR A SMOOTH AND STRAIGHT JOINT AND REPLACE THE PAVEMENT WITH THE SAME TYPE AND DEPTH OF MATERIAL AS EXISTING OR AS INDICATED.
- 17.IF DEWATERING IS REQUIRED, THE CONTRACTOR SHALL OBTAIN ANY APPLICABLE REQUIRED PERMITS. THE CONTRACTOR IS TO COORDINATE WITH THE OWNER AND THE DESIGN ENGINEER PRIOR TO ANY EXCAVATION.
- 18. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTROL OF DUST AND DIRT RISING AND SCATTERING IN THE AIR DURING CONSTRUCTION AND SHALL PROVIDE WATER SPRINKLING OR OTHER SUITABLE METHODS OF CONTROL. THE CONTRACTOR SHALL COMPLY WITH ALL GOVERNING REGULATIONS PERTAINING TO ENVIRONMENTAL PROTECTION.
- 19. THE CONTRACTOR SHALL ENSURE THAT LANDSCAPE ISLAND PLANTING AREAS AND OTHER PLANTING AREAS ARE NOT COMPACTED AND DO NOT CONTAIN ROAD BASE MATERIALS.
- 20.THE CONTRACTOR SHALL INSTALL ALL UNDERGROUND STORM WATER PIPING PER MANUFACTURER'S SPECIFICATIONS AND BALTIMORE COUNTY SPECIFICATIONS.
- 21.ALL CONCRETE/ASPHALT SHALL BE INSTALLED PER GEOTECHNICAL REPORT/SPECIFICATIONS.
- 22.BLEND NEW EARTHWORK SMOOTHLY TO TRANSITION BACK TO EXISTING GROUND.
- 23.ALL PROPOSED GRADES SHALL BE 3:1 OR FLATTER UNLESS OTHERWISE INDICATED ON THE PLANS. CONTRACTOR TO UTILIZE STABILIZATION MATTING AS SHOWN ON THE EROSION CONTROL PLANS TO PROTECT PROPOSED SLOPES.
- 24.ADHERE TO ALL TERMS AND CONDITIONS AS NECESSARY IN THE GENERAL N.P.D.E.S. PERMIT AND SOIL EROSION AND SEDIMENT CONTROL PLAN.
- 25.ADJUST AND/OR CUT EXISTING PAVEMENT AS NECESSARY TO ENSURE A SMOOTH FIT AND CONTINUOUS GRADE.
- 26.CONTRACTOR TO REFER TO THE GEOTECHNICAL ENGINEERING STUDY BY HILLIS-CARNES DATED OCTOBER 22, 2018.
- 27.THE PROPOSED GRADING SHOWN ON THIS PLAN MEETS THE REQUIREMENTS SET FORTH BY BALTIMORE COUNTY DEPARTMENT OF ENVIRONMENTAL PROTECTION AND SUSTAINABILITY AND COMPLIES WITH ARTICLE 33, TITLE 5 OF THE BALTIMORE COUNTY CODE. HOWEVER, DUE TO BUILDING TYPES AND LAYOUT, SOME FIELD ADJUSTMENT MAY BE REQUIRED. ALL CHANGES MUST COMPLY WITH THE ABOVE MENTIONED REQUIREMENTS.
- 28.ALL SWALES HAVE BEEN DESIGNED BY THE ENGINEER TO CONVEY RUNOFF ACCORDING BALTIMORE COUNTY DEPARTMENT OF PUBLIC WORKS DESIGN STANDARDS.
- 29.THERE SHALL BE NO CLEARING, GRADING, CONSTRUCTION OR DISTURBNACE OF VEGETATION IN THE FOREST BUFFER EASEMENT, OR OTHER FOREST RETENTION AREAS, EXCEPT AS PERMITTED BY THE BALTIMORE COUNTY DEPARATMENT OF ENVIRONMENTAL PROTECTION AND SUSTAINABILITY.
- 30.STORMWATER MANAGEMENT HAS BEEN ADDRESSED THROUGH A COMBINATION OF ENVIRONMENTAL SITE DESIGN AND FEE-IN-LIEU.
- 31.THE BUILDING FIRST FLOOR IS TO BE A CONCRETE SLAB AND THE WALLS ARE TO BE MASONRY.

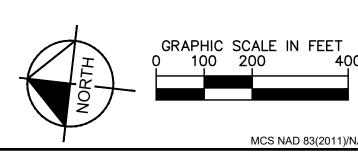

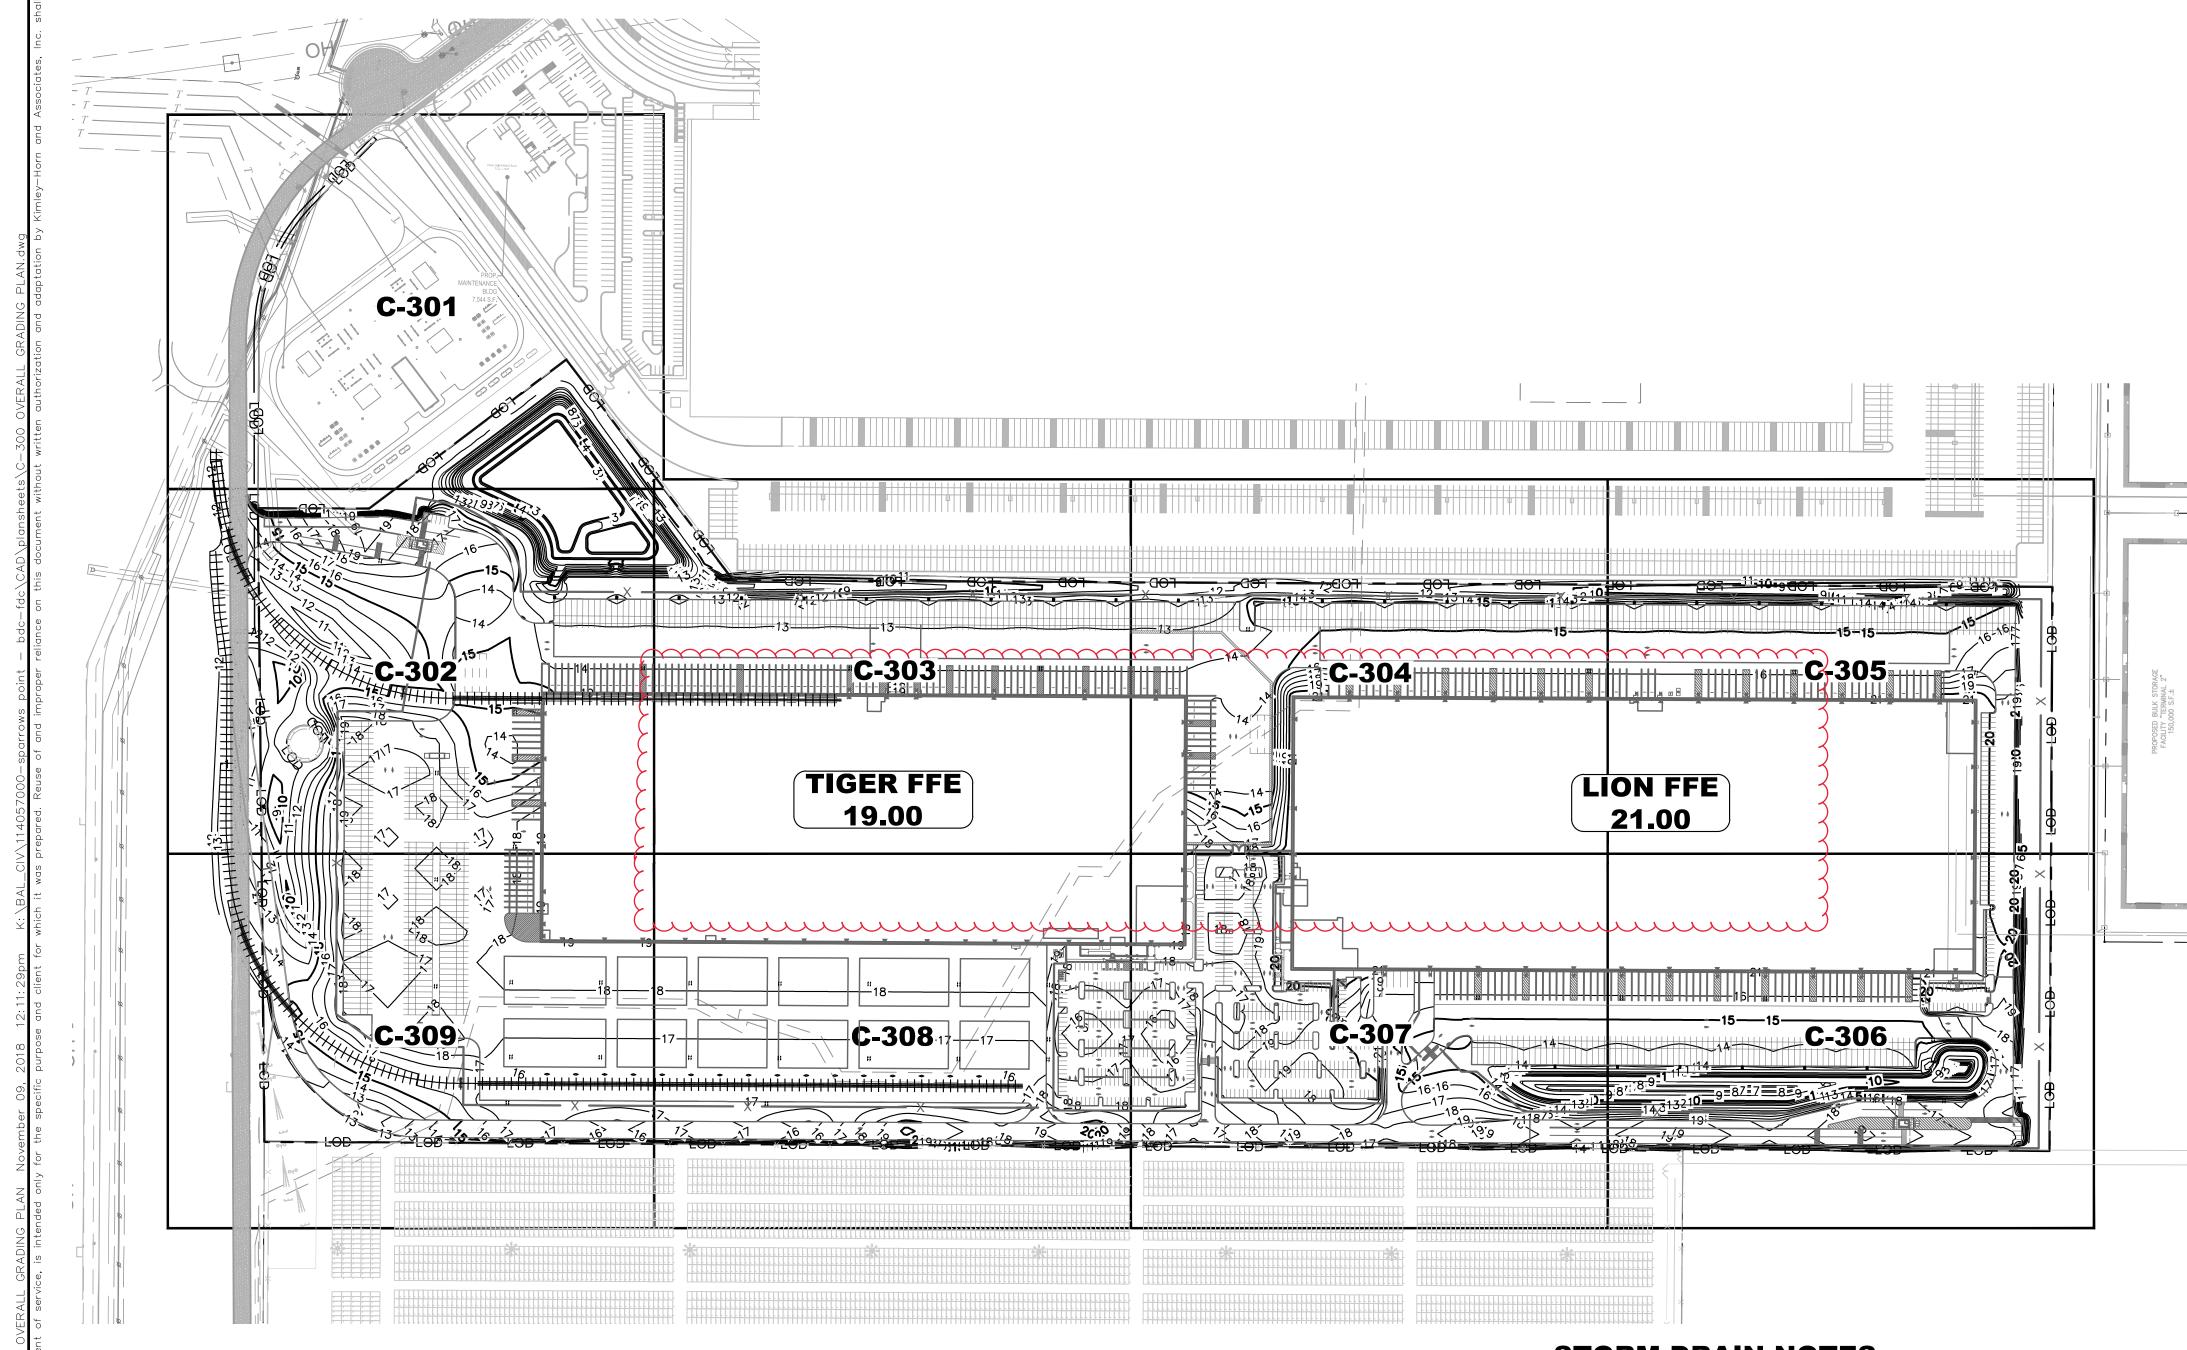

OVERALL GRADING PLAN SCALE: 1" = 200'

A. OWNER'S/DEVELOPER'S CERTIFICATION - GRADING:

I/We certify that all grading on this site will be done in accordance with the current grading requirements as set forth by the Baltimore County Department of Environmental Protection and Sustainability and with the requirements specified in Article 33, Title 5 of the Baltimore County Code.

Signature of Owner/Developer Title Date

Print Name

STORM DRAIN NOTES:

- ALL FILL MATERIAL IS TO BE IN PLACE, AND COMPACTED BEFORE INSTALLATION OF PROPOSED UTILITIES.
- 2. LINES UNDERGROUND SHALL BE INSTALLED, INSPECTED, AND APPROVED BEFORE BACKFILLING.
- 3. TOPS OF MANHOLES SHALL BE RAISED AS NECESSARY TO BE FLUSH WITH PROPOSED PAVEMENT ELEVATIONS, AND TO BE ONE FOOT ABOVE FINISHED GROUND ELEVATIONS, IN GREEN AREAS WITH WATERTIGHT LIDS.
- 4. EXISTING UTILITIES SHALL BE VERIFIED IN THE FIELD PRIOR TO INSTALLATION OF ANY NEW LINES.
- 5. CONTRACTOR IS RESPONSIBLE FOR COMPLYING TO THE SPECIFICATIONS OF BALTIMORE COUNTY AND THE STATE OF MARYLAND WITH REGARDS TO MATERIALS AND INSTALLATION OF STORM DRAIN.
- 6. CONTRACTOR IS RESPONSIBLE FOR ALL NECESSARY INSPECTIONS AND/OR CERTIFICATIONS REQUIRED BY CODES AND/OR UTILITY SERVICE COMPANIES.
- 7. CONTRACTOR SHALL COORDINATE WITH ALL UTILITY COMPANIES FOR INSTALLATION REQUIREMENTS AND SPECIFICATIONS.
- 8. ALL TIME OF CONCENTRATION PATHS FOR STORM DRAIN INLETS ARE ASSUMED TO BE A MINIMUM 0.1 HOURS.
- 9. AN RA AGREEMENT IS CURRENTLY UNDER REVIEW WITH BALTIMORE COUNTY FOR ALL WORK BEING COMPLETED IN THE COUNTY RIGHT-OF-WAY.


100 200 400
SHEET NUMBER


C-300

CALL 48 HOURS
BEFORE YOU DIG

IT'S THE LAW!
DIAL 811

Know what's below.
Call before you dig.

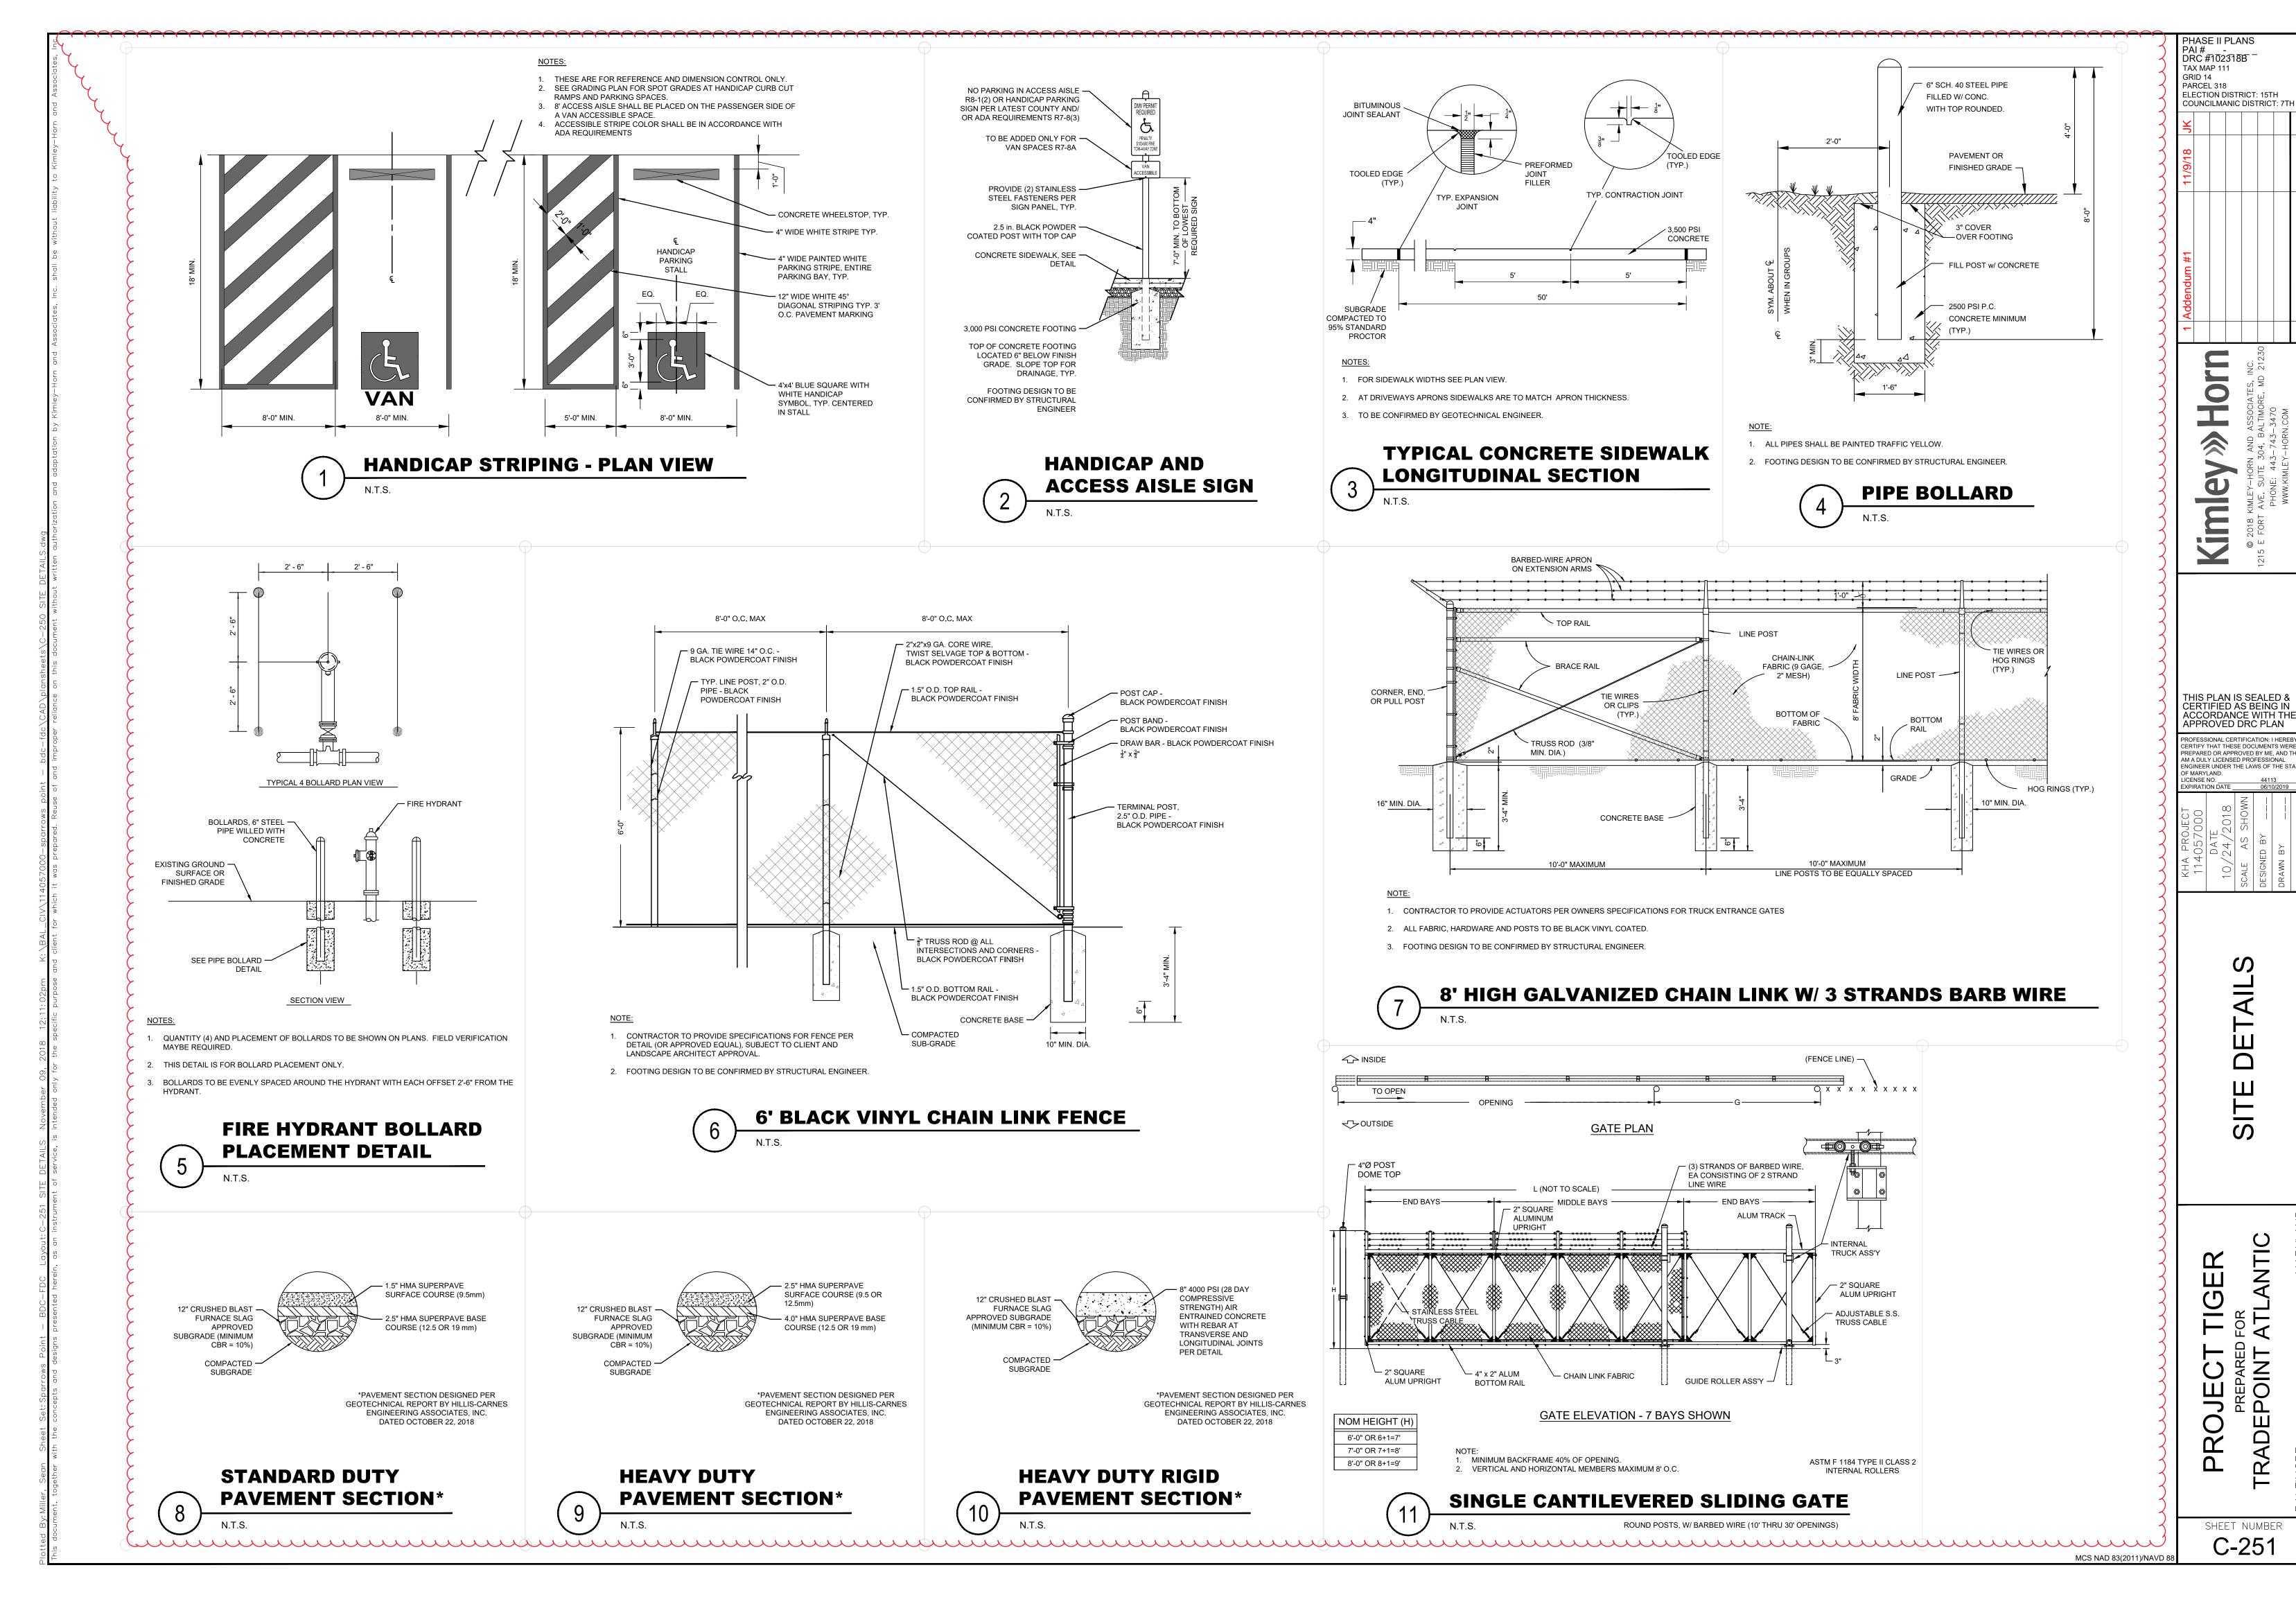


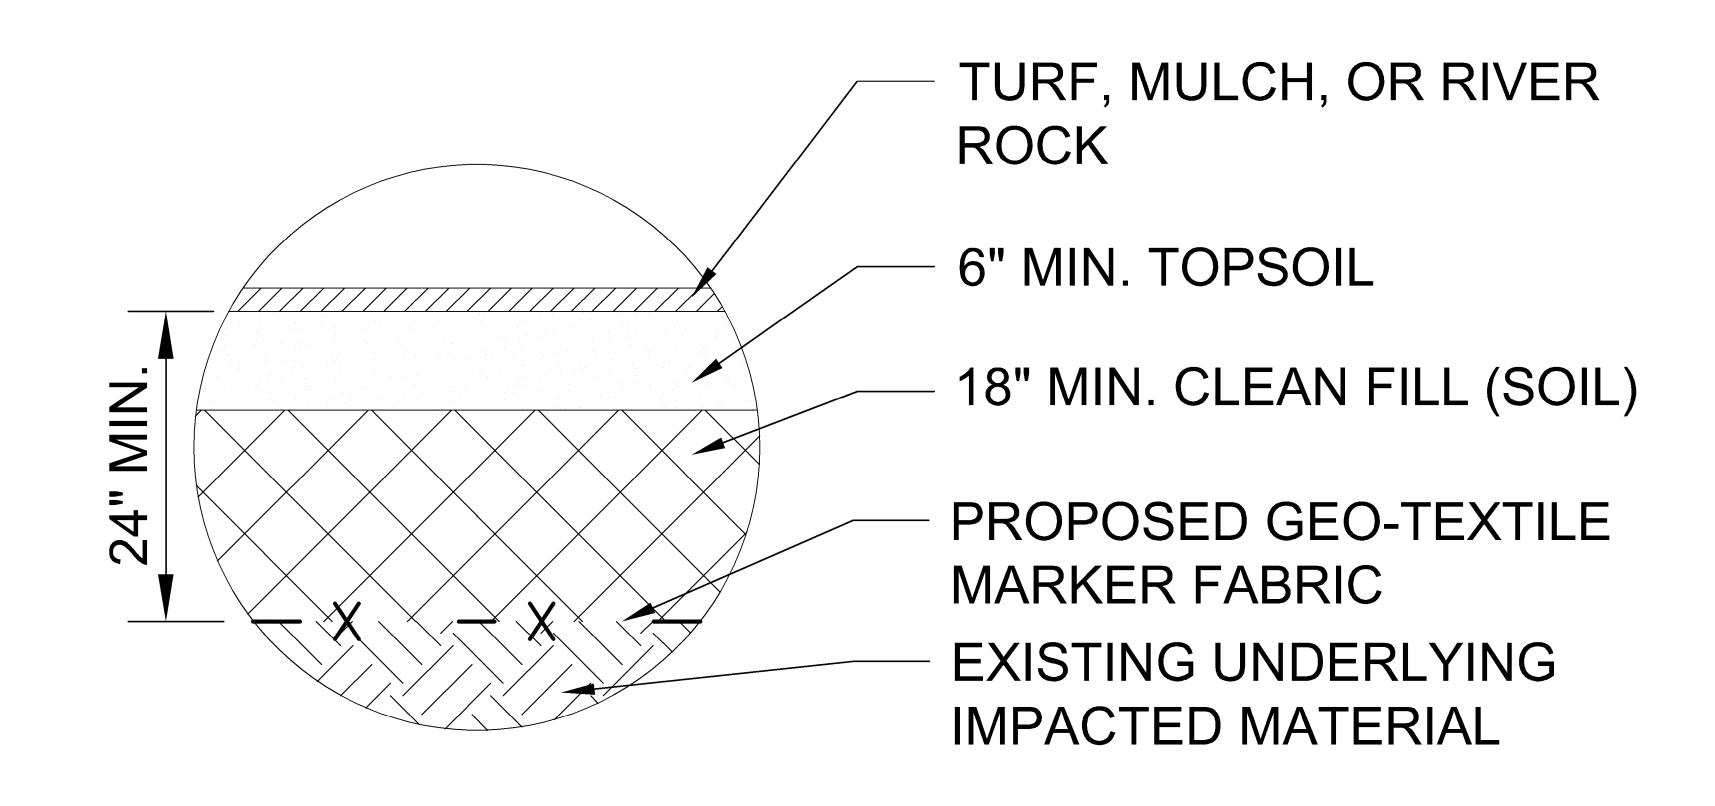


LANDSCAPE TYPICAL SECTION (LAWN AREA)

N.T.S.

APPENDIX F

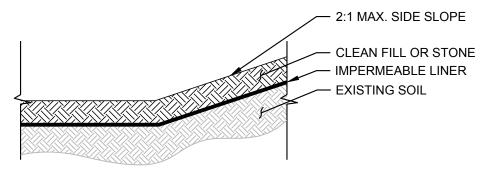


TYPICAL POND SECTIONS




TYPICAL LANDSCAPE SECTION

GEOTEXTILE MARKER FABRIC SPECIFICATIONS

THE GEOTEXTILE MARKER FABRIC SHALL BE A NONWOVEN PERVIOUS SHEET OF POLYPROPYLENE MATERIAL. ADD STABILIZERS AND/OR INHIBITORS TO THE BASE MATERIAL, AS NEEDED, TO MAKE THE FILAMENTS RESISTANT TO DETERIORATION BY ULTRAVIALET LIGHT, OXIDATION AND HEAT EXPOSURE. REGRIND MATERIAL, WHICH CONSISTS OF EDGE TRIMMINGS AND OTHER SCRAPS THAT HAVE NEVER REACHED THE CONSUMER, MAY BE USED TO PRODUCE THE GEOTEXTILE. POST-CONSUMER RECYCLED MATERIAL MAY BE USED. GEOTEXTILE SHALL BE FORMED INTO A NETWORK SUCH THAT THE FILAMENTS OR YARNS RETAIN DIMENSIONAL STABILITY RELATIVE TO EACH OTHER, INCLUDING THE EDGES. GEOTEXTILES SHALL MEET THE REQUIREMENTS SPECIFIED IN TABLE 1. WHERE APPLICABLE, TABLE 1 PROPERTY VALUES REPRESENT THE MINIMUM AVERAGE ROLL VALUES IN THE WEAKEST PRINCIPAL DIRECTION. VALUES FOR APPARENT OPENING SIZE (AOS) REPRESENT MAXIMUM AVERAGE ROLL VALUES



TYPICAL PAVING SECTION

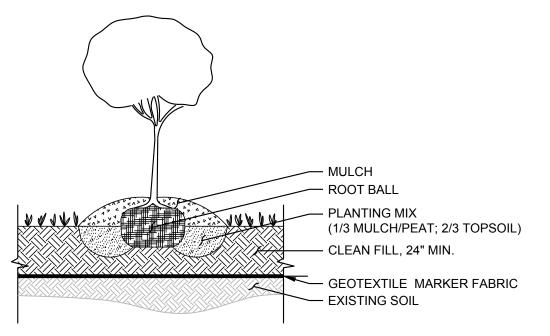

TYPICAL PLANTING SECTION

TABLE 1	WOVEN SLIT FILM GEOTEXTILE MINIMU		WOVEN MONOFILAMENT GEOTEXTILE JM AVERAGE ROLL V		NONWOVEN GEOTEXTILE		
PROPERTY	TEST METHOD	MD	CD	MD	CD	MD	CD
Grab Tensile Strength	ASTM D-4632	200 lb	200 lb	370 lb	250 lb	200 lb	200 lb
Grab Tensile Elongation ASTM D-4632		15%	10%	15%	15%	50%	50%
Trapezoidal Tear Strength ASTM D-4533		75 lb	75 lb	100 lb	60 lb	80 lb	80 lb
Puncture Strength	ASTM D-6241	450) lb	900	lb	450) lb
Apparent Opening Size ² ASTM D-4751			ieve 30 mm)	U.S. Si (0.21		U.S. Si (0.21	ieve 70 mm)
Permittivity	ASTM D-4491	0.05 sec ⁻¹		0.28 sec ⁻¹		1.1 sec ⁻¹	
Ultraviolet Resistance Retained at 500 hours	ASTM D-4355	70% strength		70% strength		70% strength	

¹ All numeric values except apparent opening size (AOS) represent minimum average roll values (MARV). MARV is calculated as the typical minus two standard deviations. MD is machine direction; CD is cross direction.


ARM Group Inc.
Engineers and Scientists


CAPPING SECTION DETAILS

Values for AOS represent the average maximum opening.

CRRGPFKZ'I ''

- 2. ALL PIPES SHALL BE PROPERLY PLACED AND BEDDED TO PREVENT MISALIGNMENT OR LEAKAGE. PIPE BEDDING SHALL BE INSTALLED IN SUCH A MANNER AS TO MINIMIZE THE POTENTIAL FOR ACCUMULATION OF WATER AND CONCENTRATED INFILTRATION.
- 3. MINIMUM COVER ABOVE UTILITY SHALL BE BASED ON SPECIFIC UTILITY REQUIREMENTS.
- TRENCHES SHALL BE BACKFILLED WITH BEDDING AND MATERIALS APPROVED BY MDE.
- 5. FOR ANY UTILITY SEGMENT WHICH GOES THROUGH AN AREA WHICH IS DESIGNATED TO RECEIVE A LANDSCAPED CAP, THE UPPER 2 FEET OF BACKFILL MUST MEET THE REQUIREMENTS OF MDE VCP CLEAN FILL FOR INDUSTRIAL LAND USE. IN THIS CASE THE MDE VCP CLEAN FILL WILL BE UNDERLAIN BY A GEOTEXTILE MARKER FABRIC. UTILITY SEGMENTS WHICH GO THROUGH AREAS WHICH DO NOT REQUIRE CAPPING OR ARE DESIGNATED TO RECEIVED A PAVED CAP WILL BE BACKFILLED WITH MATERIALS APPROVED BY MDE FOR THIS USE.

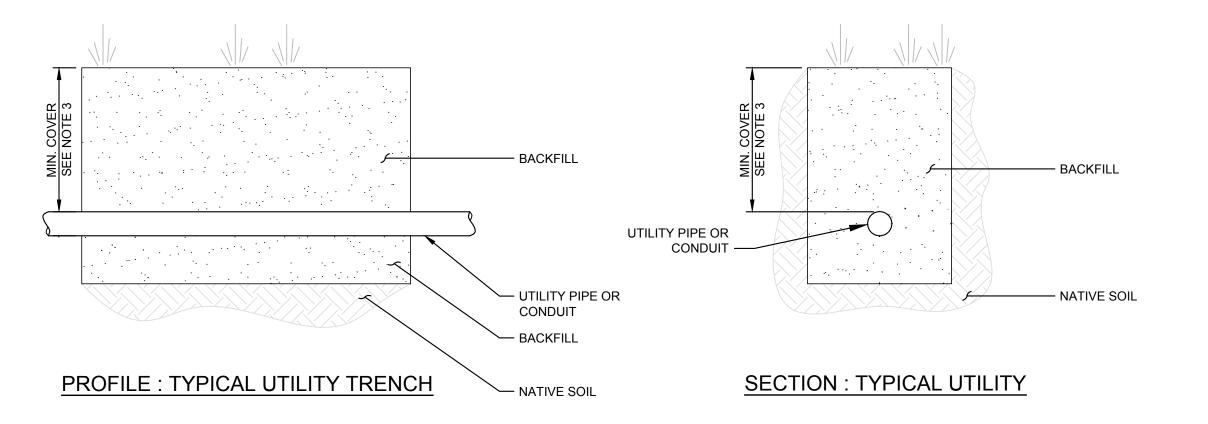

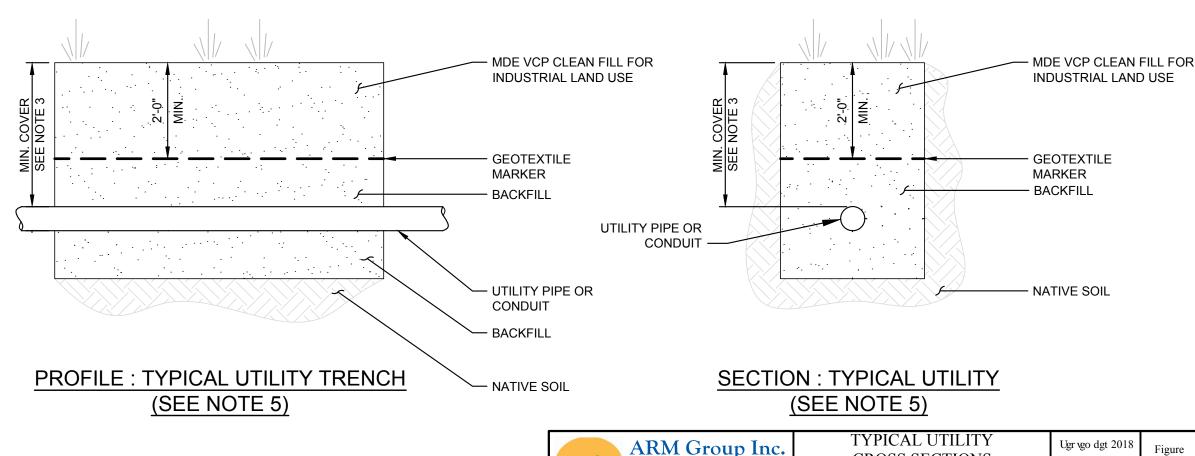

Earth Resource Engineers

and Consultants

www.armgroup.net

This drawing, its contents, and each component of this drawing are the property of and proprietary to ARM Group Inc. and shall not be reproduced or used in any manner except for the purpose identified on the Title Block, and only by or on behalf of this client for the identified project unless otherwise authorized by the express, written consent of ARM Group Inc.

TYPICAL UTILITY **CROSS SECTIONS** Sparrows Point Site EnviroAnalytics Group, LLC

Ugr vgo dgt 2018

Figure

APPENDIX H

Utility Excavation NAPL Contingency Plan

Revision 4 – June 19, 2017

Introduction:

Proposed underground utilities and excavations necessary for the redevelopment of the Tradepoint Atlantic property may encounter areas of petroleum and/or Oil & Grease contamination in soil. The assessment of total petroleum hydrocarbons (TPH) diesel range organics (DRO), gasoline range organics (GRO), Oil & Grease, and/or non-aqueous phase liquid (NAPL) completed as part of each Phase II Investigation includes the following:

- Each soil boring with evidence of NAPL (i.e., containing a sheen or free oil in the soil core), whether located near utilities or not, is investigated via the installation of a piezometer to assess mobility to groundwater. If measureable NAPL is present in the initial piezometer, additional soil borings and shallow temporary piezometers are installed surrounding the initial detection to delineate the impacts. Each piezometer installed to delineate the presence or absence of NAPL is checked with an oil-water interface probe immediately after installation, 48 hours after installation, and at least 30 days after installation.
- TPH-DRO/GRO and Oil & Grease data, once received, are assessed in their magnitude and location respective to subsurface utilities, stormwater conveyances, and surface waters.
- Locations that exhibit elevated detections of TPH/Oil & Grease or evidence of NAPL, that are within reasonable proximity (i.e. 25 feet) to subsurface utilities or stormwater conveyances and/or within reasonable proximity (i.e. 100 feet) to surface waters, are identified for further delineation and selective removal (if warranted).

Any NAPL identified in soil borings or piezometers during the Phase II Investigation would be noted on relevant logs and identified in Response and Development Work Plans for construction planning purposes. Despite these planning efforts, unidentified pockets of contamination (including NAPL) may still be encountered during construction. This contingency plan provides the procedures to be utilized during construction work to properly address response and construction techniques if any materials impacted with NAPL are encountered.

Objectives:

The purpose of this plan is to describe procedures to be followed in the event that NAPL is encountered in utility trenches or other excavations during development of the Tradepoint Atlantic property. The specific objectives of this plan and the procedures outlined herein are:

- 1. To ensure identification and proper management of Oil & Grease and petroleum-contaminated soils.
- 2. To ensure proper worker protection for working in areas of Oil & Grease and petroleum contamination.
- 3. To ensure that the installation of new utilities does not create new preferential flow paths for the migration of free-phase hydrocarbons (Oil & Grease, TPH-DRO/GRO, etc.) or soil vapors.

Identification of Oil & Grease and Petroleum Contaminated Soil:

An Environmental Professional (EP) will be on-site to determine if soils show evidence of the presence of Oil & Grease or TPH present as NAPL during installation of utility trenches or other excavation activities completed during development. Oil & Grease or petroleum-contaminated soils can be identified by the presence of free oil, oil staining, a petroleum odor, or any combination of these conditions. Free oil (NAPL) is liquid oil which could potentially be drained or otherwise extracted from the soil, and is the focus of this contingency plan, although severe staining accompanied by odors should be addressed via the same contingency measures provided herein (based on the judgement of the EP). The appearance of oil staining is not always consistent, but varies depending on the nature of the oil, the soil type, and the age of the release. Staining associated with old petroleum contamination often has a greenish hue, but may also be brown or black. The olfactory sense is the most sensitive instrument for identifying petroleum contamination in the field. Therefore, a petroleum odor may be noted although there is no visible sign of oil or staining. In some instances, decaying organic matter can produce an odor similar to petroleum, but this is rare.

If NAPL is encountered during construction, the extent of impacts shall be delineated by excavating trenches or installing four soil borings (two in each direction) perpendicular to the utility alignment or excavation to examine the soil for physical evidence of NAPL. Perpendicular transects will be investigated every 50 feet along the section of the utility trench or excavation where there is physical evidence of NAPL. Each transect will extend to a distance of 10 feet from the edge of the utility trench or excavation. This represents the maximum distance which would require mandatory excavation to mitigate potential migration risks (see below).

NAPL delineation will be guided primarily by screening observations from the perpendicular borings or trenches, and samples will be collected to test for extractable Oil & Grease or petroleum-contaminated soil using the Oil SticksTM test kit. This test kit provides a determination of whether hydrocarbons are present in soil and extractable (i.e. could mobilize as a NAPL). Oil SticksTM change from a pale blue to a deep blue color when they come in contact with free product. This instantaneous change in color occurs even when miniscule amounts of product come in contact with the strip. The sensitivity of Oil SticksTM to determine the presence/absence of oil is reported by the manufacturer to be about 1,000 to 2,000 mg/kg. The

field test is performed by placing approximately 3 tablespoons of soil in a clean sample cup and adding enough water to cover the sample. After stirring the sample and waiting ~1 minute, the Oil SticksTM test strip should be swished through the water, making sure to touch the strip to the sides of the cup where product may collect at the interface (meniscus) between the cup, water, and air. If the strip turns deep blue, or deep blue spots appear, oil or hydrocarbon is present. However, the MDE has observed that the Oil SticksTM method may produce inconsistent results. Therefore, documentation of all screening methods is necessary during boring/trenching work. This documentation shall include an accurate record of visual and olfactory screening, along with a narrative with photographs. Field screening will be aided by photoionization detector (PID) results, and Oil SticksTM samples should be biased to target elevated PID readings, if any. The agencies have requested that all soil samples prepared for the Oil SticksTM field test be photographed for evidence of sheen/residue on the cup sides. Detailed records are required to be submitted with the project-specific Completion Report.

If petroleum or Oil & Grease impacts are identified in Site soils based on use of the Oil SticksTM test kit or other field screening methods, disposal requirements will be determined using the quantitative PetroFLAGTM hydrocarbon analysis system or fixed laboratory analysis (see following section). The PetroFLAGTM hydrocarbon analysis system is a broad spectrum field test kit suitable for TPH contamination regardless of the source or state of degradation (Dexsil Corporation). PetroFLAGTM field test kits do not distinguish between aromatic and aliphatic hydrocarbons, but quantify all fuels, oils, and greases as TPH. Dilutions can be used to determine concentrations of TPH/Oil & Grease above the normal calibration range. Dexsil notes that positive results for TPH may occur if naturally occurring waxes and oils, such as vegetable oils, are present in the sample. Additional detail regarding the procedure for the PetroFLAGTM kit is given in **Attachment 1**.

Soil Excavation, Staging, Sampling and Disposal:

The EP will monitor all utility trenching and excavation activities for signs of potential contamination. In particular, soils will be monitored with a hand-held PID for potential VOCs, and will also be visually inspected for the presence of staining, petroleum waste materials, or other indications of NAPL contamination that may be different than what was already characterized. Excavated material that is visibly stained or that exhibits a sustained PID reading of greater than 10 ppm will be segregated and containerized or placed in a stockpile on polyethylene or impervious surface until the material can be analyzed using the PetroFLAGTM test kit to characterize the material for appropriate disposal. If a PetroFLAGTM test kit is not available to the contractor, or if the contractor prefers to use fixed laboratory analysis, samples may be characterized via submittal to a laboratory for TPH/Oil & Grease analysis. However, any excavated material containing NAPL (i.e., containing free oil) cannot be characterized for waste disposal using the PetroFLAGTM test kit and must instead be characterized via fixed laboratory analysis, as described in the final paragraph of this section. In addition, any hydrocarbon contaminated soil discovered during construction activities that was not previously

characterized must also be analyzed for PCBs prior to removal and transport to an appropriate disposal facility. If excavated and stockpiled, such materials will be covered with a plastic tarp so that the entire stockpile is encapsulated, and anchored to prevent the elements from affecting the integrity of the containment. The MDE will be notified if such materials are encountered during utility work.

Soil exhibiting physical evidence of NAPL contamination or elevated TPH/Oil & Grease with detections in the low percentage range, which is located within 10 feet of a proposed new utility or subsurface structure (i.e., foundation, sump, electrical vault, underground tank, etc.), will be excavated and segregated for disposal at the on-site nonhazardous landfill (Greys Landfill) or an off-site facility pending the completion of any required PCB analytical testing. Impacted soil which is located greater than 10 feet away from the proposed utility or subsurface structure may be left in place and undisturbed. The extent of the excavation will be determined in the field following visual/olfactory screening supplemented by the PID and Oil SticksTM test kit, but soil disposal requirements will be determined with the PetroFLAGTM test kit (since the Oil SticksTM method is not quantitative) or via fixed laboratory analysis for TPH/Oil & Grease (if preferred by the contractor or if the PetroFLAGTM test kit is unavailable to the contractor).

Any recovered NAPL will be collected for off-site disposal. As required by the appropriate and MDE approved facility, samples impacted by NAPL (i.e., containing free oil) will be collected for profiling/waste characterization and submitted to a fixed laboratory, as mentioned above, for the following analyses: metals, VOCs, TPH-DRO/GRO, and/or additional analysis required by the selected disposal facility. Upon receipt of any additional characterization analytical results, the MDE will be notified of the proposed disposal facility. Non-impacted material with no evidence of NAPL (i.e. soils that may contain measureable concentrations of TPH/Oil & Grease but below percentage levels) may be placed on the Site in areas to be paved or capped as long as all other requirements specified in the Response and Development Work Plan (or similar governing document) are met.

Initial Reporting:

If evidence of NAPL in soil or groundwater is encountered during excavation, it will be reported to the MDE within two hours. Information regarding the location and characteristics of any NAPL contaminated soil will be documented as follows:

- Location (exact stationing);
- Extent of contamination (horizontally and vertically prepare a sketch including dimensions);
- Relative degree of contamination (i.e. free oil with strong odor vs. staining); and
- Visual documentation (take photographs and complete a photograph log)

Utility Installations in Impacted Areas:

Underground piping or conduits installed through areas of Oil & Grease or petroleum contamination shall be leak proof and water tight. All joints will be adequately sealed or gasketed, and pipes or conduits will be properly bedded and placed to prevent leakage. All trench backfill will meet the MDE definition of clean fill, or otherwise be approved by the MDE. Pipe bedding will be installed to minimize the potential for accumulation of water and concentrated infiltration. This can be achieved by using a relatively small amount of low-permeability pipe bedding; open-graded stone will be avoided or only used in thicknesses of 6 inches or less. Bedding must be properly placed and compacted below the haunches of the pipe. Clay, flowable fill, or concrete plugs will be placed every 100 feet across any permeable bedding to minimize the preferential flow and concentration of water along the bedding of such utilities.

If required, each trench plug will be constructed with a 2-foot-thick clay plug or 1-foot-thick flowable fill or concrete plug, perpendicular to the pipe, which extends at least 1 foot in all directions beyond the permeable pipe bedding. The plug acts as an anti-seep collar, and will extend above the top of the pipe. Installation of each trench plug will follow the completion of the trench excavation, installation of granular pipe bedding (because dense-graded aggregate or soil or other pipe bedding is difficult to properly compact below the haunches of the pipe), and seating of the pipe. The trench plug will then be installed by digging out a 1-foot trench below and around the pipe corridor, and placing clay, flowable fill, or concrete to construct the plug. A specification drawing for installation of the trench plug has been provided as **Figure 1**.

Attachment 1 - PetroFLAGTM Procedure

PetroFLAGTM field test kits use a proprietary turbidimetric reaction to determine the TPH concentration of solvent extracted samples (USEPA). Calibration standards provided with the unit are used to perform a two-point calibration for the PetroFLAGTM. A blank and a 1,000 ppm standard are run by the analyzer unit to create an internal calibration curve.

Analysis of a soil sample is performed using three simple steps: extraction, filtration, and analysis. The PetroFLAGTM analysis is performed as follows:

- Place a 10 gram soil sample in a test tube.
- Add extraction solvent to the tube.
- Shake the tube intermittently for four minutes.
- Filter the extract into a vial that contains development solution
- Allow the solution to react for 10 minutes.

The filtration step is important because the PetroFLAGTM analyzer measures the turbidity or "optical density" of the final solution. Approximately 25 samples can be analyzed per hour. The vial of developed solution is placed in the meter, and the instrument produces a quantitative reading that reveals the concentration of hydrocarbons in the soil sample. The PetroFLAGTM method quantifies all fuels, oils, and greases as TPH between 15 and 2000 ppm (Dexsil Corporation). A 10x dilution of the filtered extraction solvent will be completed to allow for quantification of soil concentrations in excess of 10,000 ppm. The specially designed PetroFLAGTM analyzer allows the user to select, in the field, the response factor that is appropriate for the suspected contaminant at each site. Vegetable-based oils have been shown to exhibit a response factor of 18% (EPA Method 9074). Using the selected response factor, the analyzer compensates for the relative response of each analyte and displays the correct concentration in parts per million (ppm).


References:


U.S. Environmental Protection Agency (EPA). Contaminated Site Clean-up Information (Clu-IN): Test Kits. Office of Superfund Remediation and Technology Innovation. http://www.clu-in.net/characterization/technologies/color.cfm

Dexsil Corporation. 2016. PetroFLAG Analyzer System (PF-MTR-01). http://www.dexsil.com/products/detail.php?product_id=23

EPA SW-846 Method Number 9074 - Turbidimetric Screening Procedure for Total Recoverable Hydrocarbons in Soil

- 2. ALL PIPES SHALL BE PROPERLY PLACED AND BEDDED TO PREVENT MISALIGNMENT OR LEAKAGE. PIPE BEDDING SHALL BE INSTALLED IN SUCH A MANNER AS TO MINIMIZE THE POTENTIAL FOR ACCUMULATION OF WATER AND CONCENTRATED INFILTRATION.
- 3. ANTI-SEEP COLLARS FROM THE PIPE MANUFACTURER, THAT ARE PRODUCED SPECIFICALLY FOR THE PURPOSE OF PREVENTING SEEPAGE AROUND THE PIPE, ARE ACCEPTABLE IF INSTALLED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS, AND ONLY WITH PRIOR APPROVAL BY EAG.
- 4. MINIMUM COVER ABOVE UTILITY SHALL BE BASED ON SPECIFIC UTILITY REQUIREMENTS.
- TRENCHES SHALL BE BACKFILLED WITH BEDDING AND MATERIALS APPROVED BY MDE.
- 6. FOR ADDITIONAL REQUIREMENTS, INCLUDING THE USE OF MDE VCP CLEAN FILL FOR INDUSTRIAL LAND USE AND INSTALLATION OF GEOTEXTILE MARKER FABRIC, REFER TO NOTE 5 ON THE TYPICAL UTILITY CROSS SECTIONS.
- 7. ALL UTILITIES INSTALLED THROUGH AREAS CONTAINING NAPL OR ELEVATED CHEMICAL IMPACTS WITH THE POTENTIAL TO TRANSMIT VAPORS ALONG PREFERENTIAL FLOW PATHWAYS SHALL BE EITHER 1) BACKFILLED WITH LOW PERMEABILITY BACKFILL MATERIAL (LESS THAN OR EQUAL TO THE PERMEABILITY OF THE EXISTING SUBGRADE), OR 2) INSTALLED WITH TRENCH PLUGS ALONG THE ALIGNMENT IN ACCORDANCE WITH THE DETAILS SHOWN ON THIS PLAN AND THE FOLLOWING NOTES:
 - A.) UTILITY TRENCH PLUGS SHALL BE INSTALLED AT 100-FOOT (MAX.) INTERVALS THROUGH ALL AREAS OF NAPL CONTAMINATION.
 - UTILITY TRENCH PLUGS SHALL EXTEND A MINIMUM OF 1-FOOT IN ALL DIRECTIONS BEYOND ANY HIGHER PERMEABILITY BACKFILL MATERIALS (I.E., MATERIALS EXCEEDING THE PERMEABILITY OF THE EXISTING SUBGRADE).

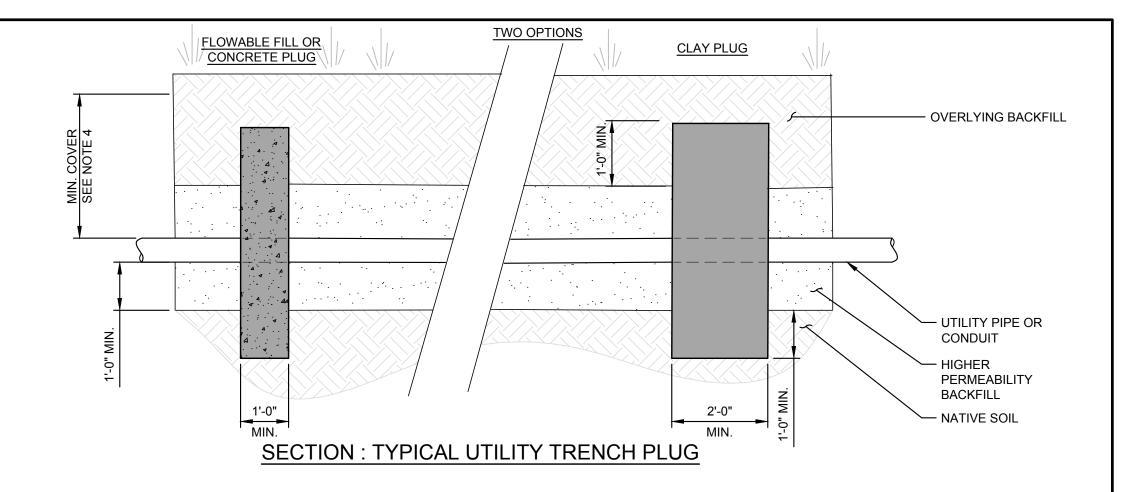

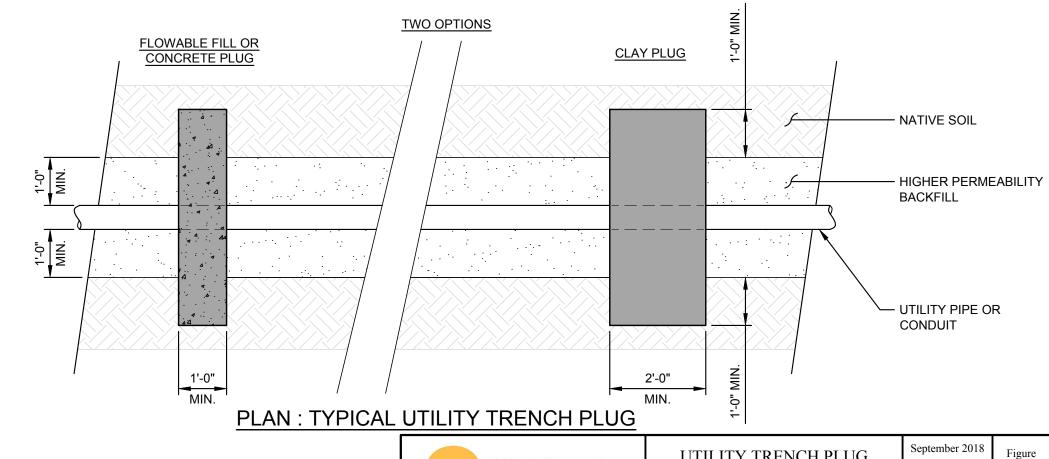

ARM Group Inc.

Engineers and Scientists

This drawing, its contents, and each component of this drawing are the property of and proprietary to ARM Group Inc. and shall not be reproduced or used in any manner except for the purpose identified on the Title Block, and only by or on behalf of this client for the identified project unless otherwise authorized by the express, written consent of ARM Group Inc.

UTILITY TRENCH PLUG

Sparrows Point Site EnviroAnalytics Group, LLC September 2018 Not to Scale

160443M

APPENDIX I

HEALTH AND SAFETY PLAN

SPARROWS POINT TERMINAL SPARROWS POINT, MARYLAND

Prepared by:



Environmental Engineers

January 2015

TABLE OF CONTENTS

1.0	Introdu	uction								
	1.1	Backgr	ound	5						
	1.2	Histori	Historic Operations 5							
2.0	Purpos	e, Scope	e, Scope and Organization 6							
	2.1	Scope		6						
	2.2	Organiz	zation of Documents	7						
	2.3	EAG He	ealth and Safety Personnel	7						
3.0	Hazard	Analysis	5	8						
	3.1	Hazard	Analysis	8						
		3.1.1	Chemical Hazards	8						
		3.1.2	Physical Hazards	8						
		3.1.3	Biological Hazards	9						
4.0	Health	Hazard	Information	9						
	4.1	Chemic	cal Hazards	9						
	4.2	Physica	ıl Hazards	14						
		4.2.1	Heat Stress	14						
		4.2.2	Cold Stress	16						
		4.2.3	Lifting Hazards	16						
		4.2.4	Slips, Trips and Falls	17						
		4.2.5	Buried Hazards	17						
		4.2.6	Electrical Hazards	17						
		4.2.7	Heavy Equipment Operations	17						
		4.2.8	Drilling and Excavation Safety	18						
		4.2.9	Use of Hand Tools and Portable Power Tools	21						
		4.2.10	Noise	21						
		4.2.11	Work Zone Traffic Control	21						
		4.2.12	Work Over Water	21						
		4.2.13	Vehicle Use	22						
	4.3	Biologi	cal Hazards	22						

5.0	Person	al Prote	I Protective Equipment 23							
	5.1	Level D	Protection	23						
	5.2	Modifie	ed Level D Protection	23						
	5.3	Level C	evel C Protection 23							
	5.4	First Ai	irst Aid, Emergency and Safety Equipment 24							
6.0	Person	nel Trair	ning and Standard Safety Procedures	24						
	6.1	Onsite	Safety, Health and Emergency Response Training	24						
	6.2	Standa	rd Safety Procedures	25						
		6.2.1	General Safety Work Practices	25						
		6.2.2	Hand Safety	25						
		6.2.3	Respiratory Protection	26						
		6.2.4	Personal Hygiene Practices	27						
		6.2.5	Electrical Safety	27						
		6.2.6	Fire Safety	27						
		6.2.7	Illumination	27						
		6.2.8	Sanitation	28						
7.0	Exposu	re Moni	toring Plan	28						
	7.1	Air Mo	nitoring	28						
		7.1.1	Combustible Gas and Oxygen Deficiency/Excess Monitoring	28						
		7.1.2	Organic Vapor Concentrations	29						
	7.2	Physica	al Conditions Monitoring	30						
8.0	Medica	ıl Surveil	llance	30						
	8.1	Medica	al Surveillance Program	30						
	8.2	Physicia	an Review	33						
9.0	Site Co	ntrol Me	easures and Decontamination	31						
	9.1	Site Co	ntrol Measures	31						
		9.1.1	Work Zone Delineation	31						
		9.1.2	Communications	32						
		9.1.3	Site Security	32						

	9.2	Decont	econtamination Procedures				
		9.2.1	Personal Decontamination	33			
		9.2.2	Equipment Decontamination	33			
		9.2.3	Waste Management	34			
10.0	Emerge	ency Res	ponse and Contingency Procedures	34			
	10.1	Emerge	ency Phone Numbers	35			
	10.2	Injury/l	llness Treatment	35			
	10.3	Occupa	tional Health Clinic and Hospital Information	36			
	10.4	Accide	nt and Emergency Medical Response	38			
		10.4.1	Chemical Exposure	38			
		10.4.2	Decontamination During Medical Emergency	38			
		10.4.3	Small or Incipient Fire	39			
		10.4.4	Large Fire or Explosion	39			
		10.4.5	Adverse Weather Conditions	39			
		10.4.6	First Aid for Heat Stress/Cold Stress	40			
		10.4.7	Snake Bites	40			
		10.4.8	Animal Bites	40			
		10.4.9	Insect Bites and Stings	41			
		10.4.10	Poisonous Plants	41			
		10.4.11	Ticks	41			

ATTACHMENTS

Attachment A – EAG Acknowledgment Form

Attachment B – MSDSs

1.0 INTRODUCTION

1.1 Background

The Sparrows Point Terminal site has historically been a steel making facility. It is located in Baltimore County, Maryland in the southeast corner of the Baltimore metropolitan area (approximately 9 miles from the downtown area), on the Sparrows Point Peninsula in the Chesapeake Bay watershed. The facility occupies the entire peninsula and is bounded to the west by Bear Creek; to the south by Patapsco River; and to the east by Jones Creek, Old Road Bay and residential areas of the City of Edgemere. The facility is bounded to the north by the Sparrows Point Country Club. The site is approximately 3,100 acres in size.

Pennsylvania Steel built the furnace at Sparrows Point in 1887 and the first iron was cast in 1889. Bethlehem Steel Corporation (BSC) purchased the facility in 1916 and enlarged it by building additional and plating facilities. BSC filed for bankruptcy in 2001. A series of entities has owned the site between then and now: the International Steel Group (ISG), Mittal Steel, ISG Sparrows Point, LLC, Severstal Sparrows Holding LLC, which was renamed to Severstal Sparrows Point, LLC, RG Steel Sparrows Point, LLC, and then a joint venture to Sparrows Point LLC (SP) and HRE Sparrows Point LLC. Most recently, in 2014, the property and assets were sold to Sparrows Point Terminal LLC (SPT). Environmental liability was retained by SP and work is currently being conducted by EnviroAnalytics Group, LLC (EAG) on behalf of SP.

- In addition to the current environmental investigation and remediation being conducted onsite by EAG and their consultants, there are other entities conducting work on the facility. Demolition of the remaining structures is currently ongoing at the site, and those contractors are being managed by SPT.
- The purpose of this document is to provide an overall health and safety plan (HASP) for EAG personnel and EAG directed contractors who are engaging in environmental investigation and remediation activities onsite. EAG directed contractors will also be expected to have their own Health and Safety Program, and they may opt to draft their own site specific HASP, provided it meets the requirements in this HASP.

1.2 Historic Operations

Steel manufacturing involves handling vast amounts of raw material including coke, iron ore, limestone and scrap steel, as well as recovering byproducts and managing waste materials. The operations listed below either were or are currently performed at the Sparrows Point Facility.

- Iron and steel production
- Coal chemical recovery system
- Other byproducts recovery systems
- Wastewater treatment systems
- Solid waste management
- Air pollution control

A number of site-specific environmental and hydrogeologic investigations have been prepared for the Sparrows Point facility. For the purposes of this HASP, information was obtained from the "Special Study Area Release Site Characterization" completed in 2001 by CH2MHill, as well as additional documents submitted since that time. There are five separate Special Study Areas as put forth in the Consent Decree:

- Humphrey Impoundment,
- Tin Mill Canal/Finishing Mills Areas,
- Coke Oven Area,
- Coke Point Landfill, and
- Greys Landfill.

Contaminated soils and groundwater may be present at the site. This plan was prepared based on an assessment of hazards expected to be present and a review of data from the previous site investigations and groundwater sampling events.

During the current investigations and remedial efforts, all related work will be performed in accordance with the requirements of this HASP and Occupational Safety and Health Administration (OSHA) regulations as defined in 29 Code of Federal Regulations (CFR) 1910.120 and 1926.65.

2.0 PURPOSE, SCOPE AND ORGANIZATION

This section describes the purpose, scope and organization of this HASP and the health and safety responsibilities of EAG, their employees, and their subcontractors involved in the field investigation and remediation activities at the Sparrows Point facility.

2.1 Scope

Field investigation and remediation activities for this project may include, but are not limited to:

- Groundwater sampling and monitoring,
- Groundwater and remediation well installation,
- Groundwater and remediation well repairs,
- Groundwater and remediation well closure and abandonment,
- Surface water sampling,
- Sediment sampling,
- Soil boring and subsurface soil sampling,
- Soil excavations for remedial purposes,
- Installation and operation of remediation systems for soil, soil vapor, and groundwater,
- Decommissioning and closure of remediation systems,
- Soil excavations for remedial purposes,
- Insitu soil mixing/soil stabilization,
- Exsitu soil mixing/soil stabilization,
- Dredging operations along Tin Mill Canal,
- Insitu chemical and/or biological injections, and
- Recovery of non-aqueous phase liquids (NAPL)

When EAG personnel are providing oversight of subcontractors, they will attend the safety and health briefings held by the contractor. EAG personnel will follow the requirements of this HASP, as well as any potentially more stringent requirements of the contractor's health and safety plan.

When EAG personnel are conducting tasks on their own, with or without subcontractors, they will follow the requirements of this HASP. EAG contractors, such as drillers, will also be required to follow the requirements of this HASP, as well as any more stringent requirements of the contractor's health and safety plan.

All EAG field personnel, including subcontractors to EAG, will be required to read and understand this HASP and agree to implement its provisions. All site personnel will sign the Acknowledgement Form included in **Attachment A** stating that they have read, understood, and agree to abide by the guidelines and requirements set forth in this plan.

2.2 Organization of Document

This HASP includes health and safety procedures for all generally anticipated project field activities. This plan also meets the OSHA requirements contained in the CFR, specifically 29 CFR 1910.120 and 29 CFR 1926, by including the following items:

- A description of staff organization, qualifications and responsibilities (Section 2.3),
- Hazard analysis (Section 3.0),
- Health hazard information (Section 4.0),
- Personal protective equipment (PPE), including available first aid, emergency, and safety equipment (Section 5.0),
- Employee and subcontractor training and standard safety procedures (section 6.0),
- Exposure monitoring plan (Section 7.0),
- Medical surveillance (Section 8.0),
- Site control measures and decontamination procedures for personnel and equipment (Section 9.0),
- Emergency response and contingency procedures (section 10.0), and
- Material Safety Data Sheets (MSDSs) for chemicals used on-site (Attachment B).

2.3 EAG Health and Safety Personnel

Personnel responsible for implementing this HASP include:

EAG Contacts for Sparrows Point Project Work							
VP Remediation, Russ Becker	(314) 686-5611						
Senior Project Manager, James Calenda	(314) 620-3056						
Senior Project Engineer, Elizabeth Schlaeger	(314) 307-1732						
Josh Burke – Field Operations Manager	(314) 686-5623						
Project Field Team Members, Jeff Wilson and Bill Trentzsch	(314) 620-3135, (314) 686-5598						

3.0 HAZARD ANALYSIS

This section outlines the potential hazards related to the field activities listed in Section 2.1.

3.1 Hazard Analysis

The field activities planned for this project pose potential health and safety hazards for field team members. This section describes the hazards associated with the above-listed field activities. Detailed chemical, physical, and biological hazards information is provided in Section 4.0 (Health Hazard Information).

Hazards to which employees and subcontractors may be exposed to as a result of the above-listed activities include potential chemical exposures, lacerations, excessive noise, thermal stress, lifting of excessive weight or bulk, hand tools and heavy equipment, drilling and slips, trips and falls.

3.1.1 Chemical Hazards

Potential exposures to chemicals in the soil or groundwater include the possibility of dermal exposure (contact and/or absorption), inhalation of chemical contamination that may be encountered during sampling or during equipment decontamination activities, or ingestion of contaminants if good personal hygiene practices are not followed.

Benzene, naphthalene, and various metals are the major contaminants that have been identified in groundwater during previous investigations at the site In addition, light NAPL (LNAPL – benzene, in particular) and dense NAPL (DNAPL – naphthalene, in particular) have also been identified or are heavily suspected in various locations in the Coke Oven Area. Dissolved metals the chemicals of concern primarily located in the area of Tin Mill Canal and the Rod and Wire Mill Area. Treatment chemicals, such as sulfuric acid, are currently being used in remediation systems. All appropriate MSDS sheets will be reviewed that apply to the investigation or remedial tasks being conducted. MSDS sheets are located in **Attachment B**. It should be noted that this is a dynamic document: should any additional chemicals be introduced or discovered, the MSDS sheets will be added to **Attachment B**, as necessary.

3.1.2 Physical Hazards

The potential physical hazards associated with field activities include:

- Excessive lifting
- Slips, trips, and falls
- Working at heights
- Exposure to extreme outside temperatures and weather
- Equipment hazards
- Drilling Hazards
- Noise
- Dust and fumes
- Injury from tools, equipment, rotating parts
- Electrical hazards
- Buried and overhead hazards
- Work over water
- Driving to, from, and around the site (including working in trafficked areas)

Additional hazards may be encountered based on the various task at hand. It will be the responsibility of the site manager, with the help of field staff, to identify and address any additional hazards on a "per task or job" basis. A Job Safety Analyses (JSA) may need to be conducted prior to the start of various tasks. Safety meetings will be conducted with all staff in attendance, before the start of any new task or when any significant personnel or other changes (such as a swift change in weather, for example) occur. Updated information relating to physical hazards will be presented during these meetings in an effort to familiarize the crew with potential hazards, discuss new situations, and determine how the associated risks can be reduced. Further, good housekeeping practices will be enforced to preclude other risks resulting from clutter and inattention to detail. In addition, internal field audits will be randomly conducted to ensure adherence to all procedures are being followed.

3.1.3 Biological Hazards

Biological hazards that may be encountered when conducting field activities include the following:

- Poisonous snakes and spiders
- Ticks and tick-borne diseases
- Stinging insects such as chiggers, bees, wasps, etc.
- Various viruses and diseases spread via animal to human contact such as West Nile virus or rabies
- Various viruses and diseases spread via human to human contact such as colds or the flu
- Dermal contact with poison ivy, oak, and/or sumac
- Bloodborne pathogens when administering first aid

First aid kits will be available on-site. It is crucial to note that any site personnel who has significant allergies should communicate that information to the field team they are working with, along with the location of their auto-injector pen (such as an Epi-Pen) for use in case of going into anaphylactic shock from something that would cause such a reaction (like a bee sting, for example). Personnel who suffer from such allergies are responsible for providing their own auto-injector devices as those are typically prescription based as well as specific to their particular allergy.

4.0 HEALTH HAZARD INFORMATION

This section provides chemical hazard information for those potentially hazardous materials expected to be present at the facility. Potential physical and biological hazards are also discussed in this section.

4.1 Chemical Hazards

Exposure to chemicals through inhalation, ingestion, or skin contact may result in health hazards to field workers. Hazards associated with exposure will be evaluated using OSHA Permissible Exposure Limits (PELs) and the American Conference of Governmental Industrial Hygienists (ACGIH) Threshold Limit Values (TLVs). Each of these values are 8-hour, time-weighted averaged (TWAs) above which an employee cannot be exposed. EAG may also use the National Institute of Occupational Safety and Health (NIOSH) Recommended Exposure Limits (RELs) where applicable. Although the OSHA PELs are the only exposure limits enforceable by law, the most stringent of exposure limits will be used as the EAG-enforced exposure criteria during field activities.

The following is a summary of the potential hazards created by the compounds that may be encountered during field activities. Data from sampling of groundwater wells was reviewed to identify potential contaminants at the site. Contaminants of concern may include benzene, toluene, ethylbenzene and xylenes (BTEX), polycyclic aromatic hydrocarbons (PAHs), phenols, metals and water treatment chemicals. Table 4-1 contains chemical information and exposure limits for various chemicals that may be expected to be present in the investigation and remediation efforts. During the recovery of NAPL, the major contaminants of concern are benzene and naphthalene. It is possible that carbon monoxide may also be encountered from the use of various internal combustion engines (vehicular or otherwise); however, it is anticipated that since any such engine will be used outdoors, it is not expected that concentrations of concern will accumulate. With the use of any such engine, the engine should be positioned such that site personnel are upwind of the engine exhaust.

If any chemicals are brought on-site, MSDS must be made available and added to **Attachment B**. Personnel must be trained in the hazards and use of chemicals.

Table 4-1
Chemical Contaminants of Potential Concern

Chemical Name Synonyms (trade name)	Exposure Limits	Characteristics	Route of Exposure	Symptoms of Exposure	
Benzene	PEL: 1PPM REL: 0.1 CA TLV: 0.5PPM STEL: 1PPM (NIOSH) Skin: YES	Colorless to light-yellow liquid with aromatic odor. LEL: 1.2% UEL: 7.8% VP: 75mm FI.P: 12°F	INH ABS ING CON	Irritation of eyes, skin, nose, respiratory system, giddiness, headache, nausea, fatigue, anorexia, dermatitis, bone marrow depression	
Ethylbenzene	PEL: 100PPM REL: 100PPM TLV: 100PPM STEL: 125PPM IDLH: 800PPM Skin: NO	Colorless liquid with an aromatic odor. LEL: 0.85 UEL: 6.7% IP: 8.76EV VP: 7mm FI.P: 55°F	INH ING CON	Irritation of eyes, skin, mucous membranes; headache; dermatitis	
1,1 dichloroethane	PEL: 100PPM REL: 100PPM TLV: 100PPM STEL: NA IDLH: 3000PPM Skin: NO	Colorless, oily liquid with a chloroform-like odor. LEL: 6.2% UEL: 16% IP: 11.05EV Vp: 64mm FI.P: 56°F	INH ING CON	Irritation of eyes, CNS depression, liver, kidney, lung damage	
Phenol	PEL: 5PPM REL: 5PPM, 15.6PPM (C) TLV: 5PPM STEL: NA IDLH 250PPM Skin: YES	Colorless to light pink crystalline solid with a sweet, acrid odor. LEL: 1.8% UEL: 5.9% IP: 8.12EV Vp: 0.08mm FI.P: 175°F	INH ING CON ABS	Irritated eyes, nose, throat, anorexia, weakness, muscular ache, pain, dark urine, cyanosis, liver, kidney damage, skin burns, dermatitis, tremor, convulsions, twitch	
Naphthalene	PEL: 10PPM REL: 10PPM TLV: 10PPM STEL: 15PPM IDLH: 250PPM Skin: YES	Colorless to brown solid with an odor of mothballs LEL: 0.9% UEL: 5.9% IP: 8.12EV Vp: 0.08mm FI.P: 174°F	INH ABS ING CON	Irritation of eyes, headache, confusion, excitement, malaise, nausea, vomiting, abdominal pain, irritated bladder, profuse sweating, jaundice, hematuria, renal shutdown, dermatitis, optical neuritis, corneal damage	
PEL: 200PPM, 300PPM (C) REL: 100PPM TLV: 20PPM STEL: 150PPM IDLH: 500PPM Skin: YES		Colorless liquid with a sweet, pungent benzene- like odor. LEL: 1.1% UEL: 7.1% IP: 8.82EV VP: 21MM FI.P: 40°F	INH ABS ING CON	Irritation of eyes, nose, fatigue, weakness, confusion, euphoria, dizziness, headache, dilated pupils, lacrimation, nervousness, muscle fatigue, insomnia, dermatitis, liver, kidney damage	
PEL: 100PPM REL: 100PPM TLV: 100PPM STEL: 150PPM IDLH: 900PPM Skin: NO		Colorless liquid with an aromatic odor. LEL: 0.9% UEL: 6.7% IP: 8.40EV VP: 5MM FI.P: 88°F	INH ABS ING CON	Irritated eyes, nose, respiratory system, headache, fatigue, dizziness, confusion, malaise, drowsiness, incoherence, staggering gait, corneal vacuolization, anorexia, nausea, vomiting, abdominal pain, dermatitis	

Chemical Name Synonyms (trade name)	Exposure Limits	Characteristics	Route of Exposure	Symptoms of Exposure		
Styrene	PEL: 100PPM, 200PPM (C) REL: 50PPM TLV: 20PPM STEL: 40PPM IDLH: 700PPM Skin: NO	Colorless to yellow, oily liquid with a sweet, floral odor. LEL: 0.9% UEL: 6.8% IP: 8.40eV VP: 5MM FI.P: 88°F	INH ABS ING CON	Irritated eyes, nose, respiratory system, headache, fatigue, dizziness, confusion, malaise, drowsiness, weakness, narcosis, dermatitis		
Chlorodiphenyl (54% chlorine) (11097-69-1)	PEL: 0.5mg/m³ REL: 0.001mg/m³ TLV: 0.5mg/m³ STEL: N/A IDLH: 5mg/m³(CA) Skin: YES	Colorless to pale yellow viscous liquid with a mild hydrocarbon odor. INH LEL: NA ABS UEL: NA ING IP: UNKNOWN CON VP: 0.00006MM FI.P: NA		Irritated eyes, chloracne, liver damage, reproductive effects (carcinogen)		
Polynuclear aromatic hydrocarbons (PAHs) (coal tar pitch volatiles) (65996-93-2)	PEL: 0.2mg/m³ REL: 0.1mg/m³ TLV: 0.2 mg/m³ STEL: N/A IDLH: 80mg/m³(CA) Skin: NO	The pitch of coal tar is black or dark brown amorphous residue that remains after the redistillation process. LEL: N/A UEL: N/A IP: VARIES VP: VARIES FI.P: VARIES	INH CON	Direct contact or exposure to vapors may be irritating to the eyes. Direct contact can be highly irritating to the skin and produce dermatitis. Exposure to vapors may cause nausea and vomiting. A potential human carcinogen.		
Arsenic (inorganic)	PEL: 0.01mg/m³ REL: NONE TLV: 0.5 mg/m³ STEL: N/A IDLH: 5mg/m³ (CA) Skin: NO	Silver-gray or tin-white brittle odorless solid. Air odor threshold: N/D.	INH ABS CON ING	Symptoms include ulceration of nasal septum, gastrointestinal disturbances, respiratory irritation and peripheral neuropathy. Potential occupational carcinogen.		
Barium	PEL: 0.5mg/m³ REL: 0.5mg/m³ TLV: 0.5mg/m³ STEL: N/A IDLH: 50mg/m³ Skin: NO	White, odorless solid. Air odor threshold: N/D.	INH ING CON	Irritated eyes, skin, upper respiratory system, skin burns, gastroenteritis, muscle spasm, slow pulse, cardiac arrhythmia		
Cadmium (elemental)	PEL: 0.005mg/m³ REL: CA TLV: 0.01mg/m³ STEL: N/A IDLH: 9mg/m³ (CA) Skin: NO	Silver-white, blue-tinged lustrous, odorless solid. Air odor threshold: N/D.	INH ING	Symptoms include pulmonary edema, cough, tight chest, head pain, chills, muscle aches, vomiting and diarrhea. Potential occupational carcinogen.		
Chromium (Metal)	PEL: 1.0mg/m³ REL: 0.5mg/m³ TLV: 0.5mg/m³ STEL: N/A IDLH: 250mg/m³ Skin: NO	Blue-white to steel-gray lustrous, brittle, hard odorless solid. Air odor threshold: N/D.	INH ING CON	Symptoms may include irritated eyes and skin, lung fibrosis.		
Chromium (Chromium III inorganic compounds)	PEL: 0.5mg/m³ REL: 0.5mg/m³ TLV: 0.5mg/m³ STEL: N/A IDLH: 25mg/m³ Skin: NO	Varies depending on specific compound.	INH ING CON	Irritation of eyes, sensitivity dermatitis		

Chemical Name Synonyms (trade name)	Exposure Limits	Characteristics	Route of Exposure	Symptoms of Exposure
Copper	PEL: 1mg/m³ REL: 1mg/m³ TLV: 1mg/m³ STEL: N/A IDLH: 100mg/m³ Skin: NO	Reddish, lustrous, malleable, odorless solid	INH ING CON	Irritation of eyes, nose, pharynx, nasal septum perforations, metallic taste, dermatitis
Lead (Elemental & Inorganic as Pb)	,		INH ING CON	Accumulative poison may cause weakness, insomnia, facial pallor, anorexia, malnutrition, constipation, abdominal pain, anemia, gingival lead line, paralysis of wrists and ankles, hypertension and kidney disease.
Nickel	PEL: 1mg/m³ REL: 0.015mg/m³ (Ca) TLV: 0.1mg/m³ STEL: N/A IDLH: 10mg/m³ Skin: NO	Lustrous, silvery, odorless solid. Air odor threshold: N/A VP: 0mm	INH CON ING	Sensitivity dermatitis, allergic asthma, pneumonitis
Vanadium pentoxide dust	PEL: 0.5mg/m³ (C) REL: 0.05mg/m³ (C) TLV: 0.05mg/m³ STEL: N/A IDLH: 35mg/m³ Skin: NO	Yellow-orange powder or dark gray, odorless flakes dispersed in air. VP: 0mm	INH ING CON	Irritated eyes, skin, throat, green tongue, metallic taste, eczema, cough, fine rales, wheezing, bronchitis
PEL: 5mg/m³ REL: 5mg/m³ TLV: 2mg/m³ STEL: 10mg/m³ IDLH: 500mg/m³ Skin: NO		White, lustrous solid	INH	Metal fume fever, chills, muscular ache, nausea, fever, dry throat, cough, weakness, metallic taste, headache, blurred vision, low back pain, vomiting, fatigue, malaise
Sulfuric Acid (water treatment chemical)	PEL: 1mg/m³ TLV: 0.2mg/m³ Skin: YES	Oily, colorless to slightly yellow, clear to turbid liquid	IHN ABS ING CON	Can cause irritation or corrosive burns to the upper respiratory system, lung irritation, pulmonary edema, burns to mouth throat and stomach, erode teeth, skin lesions
Antiscale (water treatment chemical)	PEL: 1mg/m³ TLV: 0.2mg/m³ Skin: YES	Liquid, colorless, clear	IHN ABS ING CON	May cause severe skin burns and eye damage, can cause cancer, fatal if inhaled, may damage organs through prolonged exposure
Antifoam (water treatment chemical)	N/E	Liquid emulsion, white, opaque	IHN ABS ING CON	May be harmful to skin, if inhaled and if swallowed
Gases				
Carbon Monoxide	PEL: 50PPM REL: 35PPM TLV: 25PPM STEL: 200PPM (C) IDLH: 1200PPM Skin: NO	Colorless, odorless gas LEL: 12.5% UEL: 74% IP: 14.01eV VP: >35atm FI.P: N/A	INH	Headache, rapid breathing, nausea, tiredness, dizziness, confusion

NOTES:

OSHA PEL Occupational Safety and Health administration Final Rule Limits, Permissible Exposure Limit for an

eight=hour, time-weighted average

ACGIH TLV American Conference of Governmental Industrial Hygienists, Threshold Limit Value for eight-hour, time-

weighted average

STEL Short-term Exposure Limit for a 15-minute, time-weighted average

NIOSH IDLH National Institute for Occupational Safety and Health, Immediately Dangerous to Life or Health

concentration

PPM Part of vapor or gas per millions parts of air by volume at 25°Celsius and 760mm Hg mg/m³ (milligram of

substance per cubic meter of air)

CA NIOSH has identified numerous chemicals that it recommends to be treated as potential or confirmed

human carcinogens.

(C) The (ceiling) concentration that should not be exceed during any part of the working exposure.

Skin Refers to the potential contribution to the overall exposure by the cutaneous (absorption) route, including

mucous membranes and eye, either by airborne or more particularly by direct contact with the substance.

UEL Upper Explosive Limit – the highest concentration of a material in air that produces an explosion in fire or

ignites when it contacts an ignition source.

LEL Lower Explosive Limit – the lowest concentration of the material in air that can be detonated by spark,

shock, fire, etc.

INH Inhalation
ABS Skin absorption
ING Ingestion

CON Skin and/or eye contact

4.2 Physical Hazards

Field employees and subcontractors may be exposed to a number of physical hazards during this project. Physical hazards that may be encountered include the following:

- Heat and cold stress
- Lifting hazards
- Slips, trips and falls
- Working around heavy equipment
- Drilling hazards
- Noise
- Use of hand and power tools
- Buried hazards
- Electrical hazards
- Underground and overhead utilities
- Working over water
- Travel to and from site

4.2.1 Heat Stress

Local weather conditions may produce an environment that will require restricted work schedules in order to protect employees from heat stress. The Project Manager or the Field Lead Team Member will observe workers for any potential symptoms of heat stress. Adaptation of work schedules and training on recognition of heat stress conditions should help prevent heat-related illnesses from occurring. Heat stress controls will be stated at 70°F for personnel in protective clothing and at 90°F for personnel in regular work clothing. Heat stress prevention controls include:

- Allow workers to become acclimatized to heat (three to six days)
- Provide rest breaks in a shaded or air-conditioned break area
- Provide sun screen to prevent sun burn
- Provide drinking water and electrolyte-replenishing fluids
- Keep ice readily available to rapidly cool field team members

The following Heat Stress Index should be used as a guide to evaluate heat stress situations. If the Heat Stress exceeds 105 degrees Fahrenheit, contact the project manager prior to conducting work for detailed guidance.

Heat Stress Index									
Temp.				Rela	tive Hum	idity			
°F	10%	20%	30%	40%	50%	60%	70%	80%	90%
105	98	104	110	120	132				
102	97	101	108	117	125				
100	95	99	105	110	120	132			
98	93	97	101	106	110	125		_	
96	91	95	98	104	108	120	128		
94	89	93	95	100	105	111	122		
92	87	90	92	96	100	106	114	122	
90	85	88	90	92	96	100	106	114	122
88	82	86	87	89	93	95	100	106	115
86	80	84	85	87	90	92	96	100	109
84	78	81	83	85	86	89	91	95	99
82	77	79	80	81	84	86	89	91	95
80	75	77	78	79	81	83	85	86	89
78	72	75	77	78	79	80	81	83	85
76	70	72	75	76	77	77	77	78	79
74	68	70	73	74	75	75	75	76	77
NOTES: Ad	ld 10° F w	hen prote	ective clo	thing is b	eing used	l; Add 10°	F when i	n direct s	unlight

HSI		
Temp	Category	Injury Threat
Above 130° F	Extreme Danger	No work unless emergency exists. Contact Cardno ATC RSC and Corporate Risk Management Department prior to proceeding. Heat cramps or exhaustion likely, heat stroke possible if exposure is prolonged and there is physical activity.
105° to 130° F	Danger	Contact RSC prior to proceeding. Requires strict adherence to ACGIH Heat Stress Guidelines, including use of on-site WBGT equipment. Heat cramps or exhaustion likely, heat stroke possible if exposure is prolonged and there is physical activity.
90° to 105° F	Extreme Caution	Heat cramps or exhaustion likely, heat stroke possible if exposure is prolonged and there is physical activity.
80° to 90° F	Caution	Heat cramps or exhaustion likely, heat stroke possible if exposure is prolonged and there is physical activity.
Below 80° F	Normal Range	Typical conditions for time of year. Little or no danger under normal circumstances. As always, anticipate problems and work safely.

4.2.2 Cold Stress

Frostbite and hypothermia are two types of cold injury that personnel must be protected against during the performance of field duties. The objective is to prevent the deep body temperature from falling below 96.8° F and to prevent cold injury to body extremities. Two factors influence the development of a cold injury the ambient temperature, and wind velocity. Reduced body temperature will very likely result in reduced mental alertness, reduction in rational decision making, and/or loss of consciousness with the threat of death.

•

Use appropriate cold weather clothing when temperatures are at or below 40° F as exposed skin surfaces must be protected. These protective items can include facemask, hand wear, and foot wear. Workers handling evaporative solvents during cold stress conditions will take special precautions to avoid soaking gloves and clothing because of the added danger of prolonged skin contact and evaporative cooling. Personnel will wear protective clothing appropriate for the level of cold and planned physical activity. The objective is to protect all parts of the body, with emphasis on the hands and feet. Eye protection against glare and ultraviolet light should be worn in snowy and icy conditions.

The work rate should not be so great as to cause heavy sweating that could result in wet clothing. If heavy work must be done, opportunities for rest breaks will be provided where workers have the opportunity to change into dry clothing. Conversely, plan work activities to minimize time spent sitting or standing still. Rest breaks should be taken in a warm, dry area. Windbreaks can also be used to shield the work area from the cooling effects of wind.

If extreme cold-related weather conditions occur, EAG field personnel and subcontractors will take the following precautions:

- Wear adequate insulated clothing when the air temperature drops below 40°F
- Reduce work periods in extreme conditions to allow adequate rest periods in a warm area
- Change clothes when work clothes become wet
- Avoid caffeine (which has diuretic and circulatory effects)

4.2.3 Lifting Hazards

Field personnel may be exposed to injury caused by lifting heavy objects and various pieces large or unwieldy pieces of equipment. All field team members will be trained in the proper methods for lifting heavy and/or large equipment and are cautioned against lifting objects that are too heavy or too big for one person. Proper lifting techniques include the following:

- Keep feet approximately shoulder width apart
- Bend at the knees
- Tighten abdominal muscles
- Lift with the legs
- Keep the load close to the body
- Keep the back upright
- Use the buddy system for larger or heavy pieces of equipment

All drums will be staged using an approved drum dolly or other appropriate equipment. Proper care will be taken in the use of this equipment. Healthy employees with no medical restrictions may lift and carry a maximum of 50 pounds using proper lifting and carrying techniques. This recommended weight limit may be reduced depending on physical and workplace factors.

4.2.4 Slips, Trips and Falls

The most common hazards that will be encountered during field activities will be slips, trips and falls. Field team members are trained to use common sense to avoid these hazards such as using work boots/safety shoes with nonskid soles. When working on slippery surfaces, tasks will be planned to decrease the risk of slipping via avoiding the slippery areas, if possible, or utilizing engineering controls. Engineering controls may involve the placement of supplemental material such as boards, gravel, or ice melt should be utilized to mitigate slippery conditions. Other engineering controls may involve the use of footgear traction control devices. Employees and subcontractors will avoid slippery surfaces, use engineering controls as appropriate, not hurry, and maintain good housekeeping.

4.2.5 Buried Hazards

Whenever the ground is penetrated, the potential for contacting buried hazards exists. During the planning/mobilization phase, prior to drilling or other excavation activities, EAG personnel and/or their contractors will establish the location of underground utility lines (gas, electrical, telephone, fiber optic cable, etc.) and/or substructures or other potential buried hazardous items. This may be conducted by review of historic utility and substructure maps, private utility locates, ground penetrating radar, or other technologies. If there is any evidence of utilities or subsurface objects/structures, drilling or excavation activities may be offset. If activities cannot be offset, measures will be taken to remove, disconnect, and/or protect the utilities and/or subsurface structures and/or objects. Every reasonable effort will be made to clear the area of intrusive work prior to fieldwork being started.

4.2.6 Electrical Hazards

It may be possible that overhead power lines will be in proximate locations during drilling or excavation activities. At least a 20 foot clearance must be maintained from overhead power lines. No equipment such as drill rigs or dump trucks can be moved while masts or buckets are in the upright position. Field personnel and subcontractors performing electrical work are required to be appropriately trained to work on the electrical systems in question prior to start of work. Authorization from project management personnel is required prior to any electrical work or work near overhead power lines. . When using extension cords, all field workers will ensure that they are in good working condition, are correctly rated for use, and do not contain abrasions such that bare wires could be exposed to the environment. Extension cords will not be used in wet areas without plugging the extension cord into a ground fault circuit interrupter (GFCI). GFCIs will detect a short circuit and cut power.

4.2.7 Heavy Equipment Operations

Heavy equipment must be operated in a safe manner and be properly maintained such that operators and ground personnel are protected.

Requirements for Operators

- Only qualified, trained, and authorized operators are allowed to operate equipment
- Seat belts will be used at all times in all equipment and trucks
- Operators will stop work whenever ground personnel or other equipment enter their work area;
 work will resume only when the area has been cleared
- No personnel may ride on equipment other than the Authorized Operator
- No personnel may be carried or lifted in the buckets or working "arms" of the equipment
- Spotters will be used when ground personnel are in the vicinity of heavy equipment work areas and/or when an operator is backing equipment near other structures or congested area

Requirements for Ground Personnel

- All ground personnel must wear orange protective vests in work areas with any operating heavy equipment
- Ground personnel will stay outside of the swing zone or work area of any operating equipment
- Ground personnel may only enter the swing or work area of any operating equipment when:
 - -They have attracted the operators attention and made eye contact
 - -The operator has idled the equipment down and grounded all extensions
 - -The operator gives the ground personnel permission to approach
- Ground personnel shall never walk or position themselves between any fixed object and running equipment or between two running pieces of equipment

Equipment

- Maintain operations manuals at the site for each piece of equipment that is present and in use
- Ensure operators are familiar with the manual for the equipment and operate the equipment within the parameters of the manual
- Ensure all equipment is provided with roll-over protection systems
- Verify that seatbelts are present and functional in all equipment
- Prohibit the use of equipment that has cab glass which is broken or missing
- Ensure that backup alarms are functional on all trucks and equipment
- Require all extensions such as buckets, blades, forks, etc. to be grounded when not in use
- Require brakes to be set and wheels chocked (when applicable) when not in use

Daily inspections of equipment are required using a Daily Heavy Equipment Safety Checklist. Equipment deemed to be unsafe as a result of daily inspection will not be used until required repairs or maintenance occurs. During maintenance/repair, ensure that motors are turned off, all extensions are grounded or securely blocked, controls are in a neutral position, and the brakes are set.

4.2.8 Drilling and Excavation Safety

Prior to any intrusive work, as previously mentioned, the location of underground utilities, such as sewer, telephone, gas, water and electric lines must be determined and plainly staked. Necessary arrangements must be made with the utility company or owner for the protection, removal or relocation of the underground utilities. In such circumstances, excavation will be done in a manner that

does not endanger the field personnel engaged in the work or the underground utility. Utilities left in place will be protected by barricading, shoring, suspension or other measures, as necessary.

The use of unsafe or defective equipment is not permitted. Equipment must be inspected regularly. If found to be defective, equipment must be immediately removed from use and either repaired or replaced prior to resuming work with that equipment. Field personnel will be familiar with the location of first-aid kits and fire extinguishers. Telephone numbers for emergency assistance must be prominently posted and kept current.

Good housekeeping conditions will be observed in and around the work areas. Suitable storage places will be provided for all materials and supplies. Pipe, drill rods, etc. must be securely stacked on solid, level sills. Work surfaces, platforms, stairways, walkways, scaffolding, and access ways will be kept free of obstructions. All debris will be collected and stored in piles or containers for removal and disposal.

The area of the site to undergo intrusive activity must be walked over with the drillers and/or heavy equipment operators to identify all work locations, as well as making sure all marked utilities are seen by those doing the intrusive work.

Drilling Specific Concerns:

In areas where utilities have been identified or may be suspected, pre-drilling clearance such handaugering, hand excavation (with shovels or post-hole diggers), or air-knifing to a depth of at least 5' below ground surface (BGS) may be required. The Project Manager will provide guidance in those instances on what has been determined as an acceptable means of clearing drilling locations. It should be noted that if the soil lithology changes to gravel within those 5 feet, that may be an indication of a utility trench and extreme caution should be taken OR the drilling location should be offset 5 horizontal feet from the original location. Should 3 consecutive attempts be made without success to offset a particular drilling location, the field personnel should stop and contact the Project Manager for further instruction.

Special precaution must be taken when using a drill rig on a site within the vicinity of electrical power lines and other overhead utilities. Electricity can shock, burn and cause death. When overhead electrical power lines exist at or near a drilling site, all wires will be considered dangerous.

A check will be made for sagging power lines before a site is entered. Power lines will not be lifted to gain entrance. The appropriate utility company will be contacted and a request will be made that it lift or raise cut off power to the lines.

The area around the drill rig will be inspected before the drill rig mast (derrick) is raised at a site in the vicinity of power lines. The minimum distance from any point on the drill rig to the nearest power line will be determined when the mast is raised or is being raised. The mast will not be raised and the drill rig will not be operated if this distance is less than 20 feet, because hoist lines and overhead power lines can be moved toward each other by the wind.

Before the mast is raised, personnel will be cleared from the immediate area, with the exception of the operator and a helper, when necessary. A check will be made to ensure safe clearance from energized power lines or equipment (minimum 20-foot clearance). Unsecured equipment must be removed from the mast and cables, mud lines and catline ropes must be adequately secured to the mast before raising. After it is raised, the mast must be secured to the rig in an upright position with steel pins.

Excavation Specific Concerns:

For excavation work, entry into an excavated area or trench will only be allowed when:

- Shoring, sloping, and spoil pile placement is in conformance with 29 CFR 1926 Subpart P, and
- Personal protection and monitoring, as detailed in this HASP, has been implemented.

All excavation contractors are required to provide an OSHA trained and certified Competent Person. Daily inspections of excavations, the adjacent areas, and protective systems shall be made by the Competent Person for evidence of a situation that could result in a possible cave-in, indications of failure of protective systems, hazardous atmospheres, or other hazardous conditions. An inspection shall be conducted by the Competent Person prior to the start of work and as needed throughout each shift. Inspections shall also be made after every rainstorm or other hazard increasing occurrence. All inspections made by the Competent Person should be recorded in the field log book. No personnel shall perform work in a trench or excavation that contains accumulated water (any accumulated water will need to be either pumped out until the trench/excavation is dry, or the accumulated water is allowed to disperse naturally). Each employee in an excavation shall be protected from cave-ins by an adequate protective system except when excavations are made entirely in stable rock or the excavation is less than 5 feet in depth and examination by the Competent Person provides no indication of a potential cave-in. Protective systems consist of sloping or benching, use of trench boxes or other shielding mechanisms, or the use of a shoring system in accordance with the regulations.

When mobile equipment is operated adjacent to an excavation and the operators/drivers do not have a clear and direct view of the edge of the excavation, a warning system such as barricades, hand or mechanical signals, or spotters are required.

Adequate protection shall be provided to protect employees from loose rock or soil that could pose a hazard to personnel in the excavation. All temporary spoil piles shall be kept at least 2 feet away from the edge of the excavation. Spoil piles should be placed to channel rainwater or other run-off water away from the excavation.

All excavations deeper than 4 feet deep and which have the potential to have a hazardous atmosphere or oxygen deficient atmospheres (less than 19.5% oxygen) must be tested to ensure safe working conditions, prior to entry.

4.2.9 Use of Hand Tools and Portable Power Tools

Hand tools will be kept in good repair and used only for their designed purposes. Proper protective eyewear will be worn when using hand tools and portable power tools. Unguarded sharp-edged or

pointed tools will not be carried in field personnel's pockets. The use of tools with mushroomed heads, split or defective handles, worn parts, or other defects will not be permitted. Inspect all tools prior to start-up or use to identify any defects. Tools that have become unsafe will be reconditioned before reissue or they will be discarded and replaced. Throwing or dropping of tools from one level to another will not be permitted; rather, containers and hand lines will be used for transporting tools from one level to another if working at heights.

Non-sparking tools will be used in atmospheres where sources of ignition may cause fire or explosion. Electric-powered shop and hand tools will be of the double-insulated, shockproof type, or they will be effectively grounded. Power tools will be operated only by designated personnel who are familiar and trained with their use. When not in use, tools will not be left on scaffolds, ladders or overhead working surfaces.

4.2.10 Noise

Exposure to high levels of noise may occur when working near drill rigs or other heavy equipment. Also, depending upon where the work is being performed, local equipment (e.g., airports, factory machines, etc.) may produce high levels of noise. A good indication of the need for hearing protection is when verbal communication is difficult at a distance of 2-3 feet. Personnel will be provided with ear plugs and/or earmuffs when exposed to noise levels in excess of the 8-hour Permissible Exposure Limit (PEL) of 90 decibels.

4.2.11 Work Zone Traffic Control

Personnel will exercise caution when working near areas of vehicular traffic. Work zones will be identified by the use of delineators (traffic cones, flags, vehicles, DOT approved devices, temporary or permanent fencing, and/or safety barrier tape). Personnel will wear reflective vests when working in these areas. Depending on frequency, proximity, and nature of traffic, a flag person may also be utilized.

4.2.12 Work Over Water

If personnel will be working near, above or immediately adjacent to or within 6 feet of water that is 3 feet or more deep or where water presents a drowning hazard (e.g., fast-moving stream, water body with a soft bottom), employees are required to a U.S. Coast Guard (USCG) approved personal flotation device (PFD). All PFDs must have reflective tape on them to facilitate visibility. Employees must inspect PFDs daily before use for defects. Do no use defective PFDs.

4.2.13 Vehicle Use

Personnel must use caution when driving to, from, and across the site, paying special attention to other site traffic, as well as weather and road conditions. Heavy equipment should be transported during non-rush hour traffic.

4.3 Biological Hazards

Site activities on this Site may expose workers to other hazards such as poisonous plants, insects, animals, and indigenous pathogens. Protective clothing and respiratory protection equipment, and being capable of identifying poisonous plants, animals, and insects, can greatly reduce the chances of exposure. Thoroughly washing any exposed body parts, clothing, and equipment will also protect against infections. Avoiding contact with biological hazards is the best way to prevent potential adverse health effects. Recognition of potential hazards is essential. When avoidance is impractical or impossible, PPE, personal hygiene, good general health and awareness must be used to prevent adverse effects. If working in wooded/grassy areas, use appropriate insect repellants (containing DEET and/or Permethrin) and apply them per the manufacturers' directions. The following is a list of biological hazards that may be encountered while performing field activities at the project site and surrounding areas:

DIGIOGICAL III	CONTROL MEASURES
BIOLOGICAL HAZARD and LOCATION	CONTROL MEASURES
Snakes typically are found in underbrush and tall grassy areas.	If you encounter a snake, stay calm and look around; there may be other snakes. Turn around and walk away on the same path you used to approach the area. If a person is bitten by a snake, wash and immobilize the injured area, keeping it lower than the heart if possible. Seek medical attention immediately. DO NOT apply ice, cut the wound or apply a tourniquet. Carry the victim or have him/her walk slowly if the victim must be moved. Try to identify the snake: note color, size, patterns and markings.
Poison ivy, poison oak and poison sumac typically are found in brush or wooded areas. They are more commonly found in moist areas or along the edges of wooded areas.	Become familiar with the identity of these plants. Wear protective clothing that covers exposed skin and clothes. Avoid contact with plants and the outside of protective clothing. If skin contacts a plant, wash the area with soap and water immediately. If the reaction is severe or worsens, seek medical attention.
Exposure to bloodborne pathogens may occur when rendering first aid or CPR, or when coming into contact with medical or other potentially infectious material or when coming into contact with landfill waste or waste streams containing such infectious material.	Training is required before a task involving potential exposure is performed. Exposure controls and personal protective equipment (PPE) area required. Hepatitis B vaccination must be offered before the person participates in a task where exposure is a possibility.
Bees, spiders and other stinging insects may be encountered almost anywhere and may present a serious hazard particularly to people who are allergic.	Watch for and avoid nests. Keep exposed skin to a minimum. Carry a kit if you have had allergic reactions in the past and inform the Project Manager and/or the buddy. If a stinger is present, remove it carefully with tweezers. Watch for allergic reaction; seek medical attention if a reaction develops.
Ticks typically are in wooded areas, bushes, tall grass and brush. Ticks are black, black and red or brown and can be up to one-quarter inch in size.	Avoid tick areas. Wear tightly woven, light-colored clothing with pants tucked into boots or socks. Spray outside of clothing with insect repellent containing permethrin. Check yourself for ticks often. If bitten, carefully remove tick with tweezers. Report the bit to the Project Manager. Look for symptoms of Lyme

disease that include a rash that looks like a bulls eye
and chills, fever, headache, fatigue, stiff neck or bone
pain. If symptoms appear, seek medical attention.

5.0 PERSONAL PROTECTIVE EQUIPMENT

PPE ensembles are used to protect employees and subcontractors from potential contamination hazards while conducting project field activities. Level D is expected to be used for most activities at the site. The following subsections describe the PPE requirements for the field activities.

5.1 Level D Protection

When the atmosphere contains no known hazards and work functions preclude splashes, immersions or the potential for unexpected inhalation of or contact with hazardous levels of any chemicals, Level D protection may be used. Level D does not provide respiratory protection and only provides minimal dermal protection. The Level D ensemble consists of the following:

- Work clothes that may consist of a short or long-sleeved cotton shirt and cotton pants, cotton overalls, or disposal overalls such as Tyvek™
- Steel-toe/steel-shank work boots
- Safety glasses with side shields
- Hearing protection, as necessary
- Hand protection, as appropriate
- Hard hat when working around overhead equipment such as a drilling rig
- Reflective vests when working around heavy equipment or near roadways
- Body harness and life vests when working on or within 6 feet of bulkheads, at heights, or in 3 feet or more of standing water (such as in Tin Mill Canal)

5.2 Modified Level D Protection

This is the level of protection that may be needed for material handling, sampling operations, and operation of remediation equipment when splash hazards are present. Modified Level D protection consists of the following:

- Disposable overalls such as polyethylene-coated Tyvek™
- Latex, vinyl, or nitrite inner gloves when handling liquids/fluids
- Nitrile outer gloves (taped to outer suit)
- Chemical-protective over-boots (taped to outer suit)
- Steel-toe/steel-shank, high-ankle work boots
- Hard hat with face shield
- Safety glasses with side shields or goggles
-) L
- Hearing protection, as necessary

5.3 Level C Protection

Level C protection will be used when site action levels are exceeded and respiratory protection is required. The Level C ensemble consists of Modified Level D with the following modifications:

- Half or full-face air-purifying respirator (APR) equipped with appropriate cartridges/filters
- Chemical resistant clothing such as poly-coated Tyvek™
- Inner and outer nitrile gloves
- Chemical-resistant safety boots or boot covers to go over safety boots

Upgrading or downgrading the level of protection used by EAG employees and subcontractors is a decision made by EAG based on the air monitoring protocols presented in Section 7.0 for respiratory protection, the potential for inhalation exposure to toxic chemicals, and the need for dermal protection during the activity.

5.4 First Aid, Emergency and Safety Equipment

The following first aid, emergency and safety equipment will be maintained onsite at the work area:

- A portable eye wash
- Appropriate ABC-type fire extinguishers (minimum of 10 pounds; remediation systems to house individual 20 pound extinguishers) carried in every vehicle used during field operations
- Industrial first-aid kit (one 16-unit that complies with American National Standards Institute (ANSI) Z308A for every 25 persons or less)
- Bloodborne pathogen precaution kit with CPR mouth shield
- Instant cold packs
- Soap or waterless hand cleaner and towels
- American Red Cross First Aid and CPR Instruction Manuals

6.0 PERSONNEL TRAINING AND STANDARD SAFETY PROCEDURES

Employees must have received, at the time of project assignment, a minimum of 40 hours of initial OSHA health and safety training for hazardous waste site operations. Personnel who have not met the requirements for the initial training will not be allowed in the Exclusion Zone (EZ) or Contamination Reduction Zone (CRZ) of any active work area. A copy of each subcontractor site worker's 40-hour training certificate must be sent to the Project Manager for review prior to the start of the site work.

The 8-hour refresher training course must be taken at a minimum of once per year. At the time of the job assignment, all site workers must have received 8 hours of refresher training within the past year. This course is required of all field personnel to maintain their qualifications for hazardous waste site work. A copy of each subcontractor site worker's most recent 8-hour refresher training certificate must be sent to the Project Manager for review prior to the start of the site work.

A site-specific safety orientation will be conducted by EAG for all EAG employees and subcontractors engaged in fieldwork.

6.1 Onsite Safety, Health and Emergency Response Training

The OSHA 1910.120 standard requires that site safety and health training be provided by a trained, experienced supervisor. "Trained" is defined to mean an individual that has satisfactorily completed the OSHA 40-hour Hazardous Waste Operations and Emergency Response (HAZWOPER) course and 8-hour site supervisor training. Training will be offered at the time of the initial task assignment and/or whenever new chemicals are introduced into the workplace. Training will include all applicable regulatory requirements, location of the program, inventory and MSDSs, chemicals used and their hazards (chemical, physical, and health), how to detect the presence or release of chemicals, safe work practices and methods employees can take to protect themselves from hazards, how to read MSDSs and site or project specific information on hazard warnings and labels in use at that location. All training will be documented and training certificates will be kept in the employee's permanent training file. All applicable training will also require annual refreshers.

EAG qualified personnel must also provide safety meetings.

6.2 Standard Safety Procedures

This section describes the standard safety procedures that EAG requires all onsite personnel to follow during site activities.

6.2.1 General Safety Work Practices

All onsite employees and subcontractors will observe the following general safety work practices:

- Health and safety tailgate briefings will occur to introduce new activities, any new safety issues, and emergency egress routes for work areas; any significant change (added personnel, change in scope, or change in field conditions) will trigger a second (or more) tailgate meeting to address whatever change occurred
- No food, drink, or tobacco products will be allowed in the Exclusion and Contamination Reduction Zones
- Loose clothing, hair, and/or jewelry will not be permitted around moving or rotating equipment
- The "buddy system" will be implemented as necessary whereby a pair of co-workers watches out for each other while in proximity of potential physical work hazards
- Good housekeeping of all work areas will be maintained on an ongoing basis

6.2.2 Hand Safety

This standard is intended to protect employees from activities that may expose them to injury. This standard provides information on recognizing those conditions that require personal protective equipment (PPE) or specific work practices to reduce the risk of hand injury.

Appropriate gloves must be worn when persons work with materials or equipment that presents the potential for hand injury due to sharp edges, corrosives, flammable and irritating materials, extreme temperatures, splinters, etc.

<u>Guidelines for Working With and Around Equipment (Hand Tools, Portable Powered Equipment)</u>:

- Employees should be trained in the use of all tools.
- Keep hand and power tools in good repair and use them only for the task for which they were designed.

- Inspect tools before use and remove damaged or defective tools from service.
- Operate tools in accordance with manufacturer's instructions.
- Do not remove or bypass a guarding device for any reason.
- Keep surfaces and handles clean and free of excess oil to prevent slipping.
- Wear proper PPE, including gloves, as necessary.
- Do not carry sharp tools in pockets.
- Clean tools and return to the toolbox or storage area upon completion of a job.
- Before applying pressure, ensure that wrenches have a good bite.
- Brace yourself by placing your body in the proper position so you will not fall if the tool slips.
- Make sure hands and fingers have sufficient clearance in the event the tool slips.
- Always pull on a wrench, never push.
- When working with tools overhead, place tools in a holding receptacle when not in use.
- Do not throw tools from place to place or from person to person, or drop tools from heights.
- Inspect all tools prior to start-up or use to identify any defects.
- Powered hand tools should not be capable of being locked in the ON position.
- Require that all power-fastening devices be equipped with a safety interlock capable of activation only when in contact with the work surface.
- Do not allow loose clothing, long hair, loose jewelry, rings, and chains to be worn while working with power tools.
- Do not use cheater pipes.
- Make provisions to prevent machines from restarting through proper lockout/tagout.

Guidelines for using Cutting Tools:

- Always use the specific tool for the task. Tubing cutters, snips, self- retracting knives, concealed blade cutters, and related tools are task specific and minimize the risk of hand injury. For more information about cutting tools, see Supplemental Information A.
- Fixed open-blade knives (FOBK) are prohibited from use. Examples of fixed open-blade knives include pocket knives, multitools, hunting knives, and standard utility knives.
- When utilizing cutting tools, personnel will observe the following precautions to the fullest extent possible:
- Use the correct tool and correct size tool for the job.
- Cut in a direction away from yourself and not toward other workers in the area.
- Maintain the noncutting hand and arm toward the body and out of the direction of the cutting tool if it were to slip out of the material being cut.
- Ensure that the tool is sharp and clean; dirty and dull tools typically cause poor cuts and more hazard than a sharp, clean cutting tool.
- Store these tools correctly with covers in place or blades retracted, as provided by the manufacturer.
- On tasks where cutting may be very frequent or last all day (e.g., liner samples), consider Kevlar® gloves in the PPE evaluation for the project.
- Do not remove guards on paper cutters.

6.2.3 Respiratory Protection

Based on air monitoring, an upgrade to Level C protection may be indicated. Half or full-face APRs will be utilized for protection against organic vapors and particulates. All employees required to wear respirators will be need to be medically cleared, in writing to do so by a qualified Occupational Physician.

All respirator users must be trained before they are assigned a respirator, annually thereafter, whenever a new hazard or job is introduces and whenever employees fail to demonstrate proper use or knowledge. Training will include, at a minimum:

- Why the respirator is necessary and what conditions can make the respirator ineffective.
- What limitation and capabilities of the respirators area.
- How to inspect, put on and remove and check the seals of the respirator.
- What respirator maintenance and storage procedures are.
- How to recognize medicals signs and symptoms that may limit or prevent effective use of the respirator.
- The engineering and administrative controls being used and the need for respirators.
- The hazards and consequences of improper respirator use.
- How to recognize and handle emergency situations.

Training will be documented and training certificated will be kept in the employee's permanent training file.

6.2.4 Personal Hygiene Practices

The field team must pay strict attention to sanitation and personal hygiene requirements to avoid personal contamination. The following instructions will be discussed and must be followed:

- During field activities, never put anything in the mouth, including fingers
- All employees must wash their hands, forearms, face, and neck before eating drinking, smoking or using the restroom
- Smoking is prohibited except in designated areas outside the work zone
- At the end of the day, all employees will shower upon returning home or to their hotel

6.2.5 Electrical Safety

All extension cords used onsite must be heavy-duty variety and must be properly grounded. All temporary circuitry must incorporate the use of GFCI devices. Refer to electrical safety in Section 4.2.6, Electrical Hazards.

6.2.6 Fire Safety

All flammable liquids will be used only for their intended purpose and stored and handled only in approved containers. Portable containers must be the approved red safety containers equipped with flame arresters and self-closing lids. All transfers of flammable liquids must be made with the containers grounded or bonded. Also, gasoline containers will be clearly labeled and storage areas (if

applicable) will be posted with "No Smoking" signs. Fire extinguishers will be stalled in all areas that contain flammable liquids.

6.2.7 Illumination

All work is planned for daylight hours. No special requirements are anticipated. However, should any work take place outdoors after daylight hours, suitable lighting will be required. In addition, suitable lighting is to be provided in each remediation system building or enclosure.

6.2.8 Sanitation

Potable water and toilet facilities will be provided in compliance with the OSHA 1926.51 standard. Any container used to distribute drinking water shall be clearly marked and not used for any other purpose. Single drinking cups will be supplied, both a sanitary container for the unused cups and a receptacle for disposed of the used cups will also be provided. Port-a-johns will be provided since there are no sanitary sewers on the job site.

7.0 EXPOSURE MONITORING PLAN

This section describes air and personnel monitoring protocols, sampling methods, and instrumentation to be used, as well as the methods and frequency of sampling instrument calibration and action levels for potential work site hazards. When engaged in air monitoring, EAG personnel and subcontractors must use the forms to record air monitoring data and air monitoring instrument calibration records. All monitoring records/forms are to be maintained in the project file by the EAG Project Manager.

7.1 Air Monitoring

The surveillance program is established to detect changes in the ambient air at the work site and to ensure the continuing safety of the work zones and adequacy of the level of worker protection. During field activities, the designated field team member will monitor the work site for combustible gas concentrations and organic vapors. Calibration of all monitoring equipment will be performed in accordance with the manufacturers' procedures by trained EAG employees and subcontractors. The Project Manager, Project Field Team Leader or representative will be notified immediately of any contaminant levels that could trigger an upgrade in PPE or cause a suspension of site activities.

One or more of the following direct-reading instruments may be used to aid in this
determination. Photoionization Detectors (PID) and Flame Ionization Detectors (FID) will
measure non-specific organic gases and vapors. Combustible Gas Indicators (CGI) will detect
explosive atmospheres. Oxygen (O2) meters will detect fluctuations in oxygen concentrations.
These instruments should be calibrated or bump tested daily and whenever the readings may be
erratic. All readings should be recorded in the field log books.

Air monitoring results obtained from the breathing zone during field activities will be recorded in field log books. All such records will also include the location, date/time, weather conditions, person monitored, background concentration, and identification of specific contaminant whenever possible. Air monitoring information will be utilized to evaluate personnel exposure and assess the appropriateness of PPE for Site conditions.

7.1.1 Combustible Gas and Oxygen Deficiency/Excess Monitoring

Explosive gas concentrations are not expected to exceed 10% of the lower explosive level (LEL). Should the need be indicated for monitoring, action guidance for the CGI/O2 meter responses is contained in **Table 7-1**.

Table 7-1

CGI/Oxygen Meter Action Levels		
Meter Response	Action	
CGI response 0%-10% LEL	Continue normal operations	
CGI initial response >10% and <20% LEL	Eliminate all sources of ignition from the work	
	area; temporarily retreat from work area for 15-30	
	minutes and then monitor area again	
CGI response after 15-30 minute retreat >10% and	Retreat from work area; notify Project Manager	
<20% LEL		
CGI response >20%	Discontinue operations; retreat from work area	
Oxygen level <19.5%	Retreat from work area; notify Project Manager	
Oxygen level >23.5%	Retreat from work area; notify Project Manager	

7.1.2 Organic Vapor Concentrations

Real-time monitoring for organic vapor concentrations in the breathing zone and down hole will be conducted during field operations (installation of groundwater monitoring and groundwater sampling by EAG and EAG subcontractor personnel) with a PID equipped with a 10.2- or 11.7-electron volt (eV) probe. The PID will be taken into the field and operated during site activities where contaminated soil and/or groundwater may be present. Air monitoring will be conducted during well installation and when a well is opened for groundwater measurements. Measurements will be made at the well head and personnel breathing zones where activities are being performed. The instrument will be calibrated using ultra-high purity air and isobutylene vapor of known concentration before and after use each day. Air calibration measurements will be documented in writing and kept in the project file. Action guidance for PID responses is contained in **Table 7-2**.

Table 7-2

Action Levels for General Site Work	
Meter Response in Breathing Zone (minimum of 3 minutes)	Action Required
<5ppm above background	Use Level D PPE
>5ppm above background	Level C PPE, including half or full-face APR with organic vapor cartridges/P100 filters
>50ppm above background	Stop work
Action Levels for Handling NAPL	
Meter Response in Breathing Zone (minimum of 3 minutes)	Action Required
<1ppm above background	Use Modified Level D PPE
>1ppm to <10ppm	Level C PPE, including half or full-face APR with organic vapor cartridges
>10ppm above background	Immediately withdraw; monitoring will continue until action levels will allow safe re-entry

If air concentrations of organic vapors are greater than 5 ppm above background in the breathing zone for a 3-minute period, personnel will stop work, retreat from site, and allow time (at least 15 minutes) for vapors to dissipate. If monitoring indicates that concentrations still exceed 5 ppm, workers will upgrade to Level C PPE. If monitoring indicates that concentrations exceed 50 ppm, work will be stopped until site conditions can be re-evaluated.

These action levels are based on the assumption that the major component of free product being recovered will be benzene or naphthalene.

Work involving NAPL recovery from monitoring wells will be conducted in Level C PPE. This level may be downgraded based on air monitoring data and actual field conditions. Downgrading of PPE must be approved by the PM and HSE staff. If ventilation is conducted, additional air monitoring will be performed to the resumption of work to determine the level of PPE required.

7.2 Physical Conditions Monitoring

Site workers will be monitored by the Project Manager for signs of weather-related symptoms from exposure to excessive heat or cold.

Whenever the air temperature exceeds 70°F for personnel wearing chemical protective clothing or 90°F for personnel wearing regular work clothes, the Project Manager will assess conditions that may cause heat stress in site workers.

8.0 MEDICAL SURVEILLANCE

This section discusses the medical surveillance program, how the results are reviewed by a physician and how participation is documented.

8.1 Medical Surveillance Program

All personnel who will be performing any task where potential exposure to hazardous material exists will undergo medical surveillance as outlined in OSHA 29 CFR 1910.120(f). All personnel performing tasks in the Exclusion Zone or Contamination Reduction Zone will be required to have passed the EAG medical surveillance examination (or equivalent), performed by a licensed Occupational Physician. The Project Manager will verify that all EAG and subcontractor personnel meet applicable OSHA medical surveillance requirements.

Applicable field employees will undergo an annual comprehensive medical examination, including a comprehensive health history, blood chemistry with complete blood count and differential, urinalysis, medical history, required chest x-rays, audiogram, pulmonary function testing, testing for heavy metals (as needed), and a physician's interpretation of each employee's medical surveillance examination, including the ability of the employee to wear a respirator. A comprehensive medical examination will be performed if an employee develops signs or symptoms indicating possible overexposure to hazardous substances and/or heat or cold stress.

8.2 Physician Review

All medical surveillance and examination results are reviewed by a licensed physician who is certified in Occupational Medicine by the American Board of Preventive Medicine. EAG employee participation in the medical surveillance program is a part of their permanent medical record maintained in the employee's home office. A copy of the current medical clearance signed by the occupational health physician for all EAG employees must be maintained at the home office.

9.0 SITE CONTROL MEASURES AND DECONTAMINATION

To provide for the protection of public health and safety and minimize the possibility of transferring hazardous substances from the site, contamination control procedures are required. These procedures consist of site control measures (which entail the delineation of work zones, communications, and site security) and decontamination procedures (which are necessary for both personnel and equipment). Contaminants that may be uncovered during sampling operations must not be transferred outside the work zone unless properly containerized, and must be removed from clothing, personnel, and equipment prior to relocation from that zone. This section discusses site control measures and decontamination procedures to be used during the collection of samples, the installation of soil borings and/or groundwater monitoring/remediation wells, excavations, and other intrusive work where contact with impacted soils and groundwater could occur by EAG and/or EAG subcontractor personnel.

9.1 Site Control Measures

Site control can be achieved by effectively delineating the work zone, providing appropriate communication, and establishing site security.

9.1.1 Work Zone Delineation

To minimize the transfer of hazardous substances from the site and to ensure proper protection of employees and subcontractors, work zones will be established by the Field Project Team Leader. Applicable site work and the associated requirement for work zones will be determined by the Project Manager. The work area will be divided into an Exclusion Zone (EZ), a Contamination Reduction Zone (CRZ), and a Support Zone (SZ). A typical work zone delineation setup is shown as **Figure 9-1**, below.

Exclusion Zone (EZ)

Contamination does or could exist in this zone. Only properly authorized and trained individuals (refer to Section 6.0) wearing appropriate PPE will be allowed to enter and work in this zone. All people entering the EZ must wear, at a minimum, Level D protection. An entry and exit point for personnel and equipment will be established at the periphery of the EZ (between the EZ and the CRZ) to regulate the flow of personnel and equipment.

Contamination Reduction Zone (CRZ)

Between the EZ and the SZ will be the CRZ, which will provide a transition between the potentially contaminated EZ and the clean SZ. The CRZ (located upwind of the EZ, if possible) will be a corridor leading from the EZ and will serve as a buffer to further reduce the probability of the SZ becoming contaminated. Exit from the EZ will only be allowed through this CRZ. The CRZ will provide additional assurance that the physical transfer of contaminating substances on people, equipment, and/or in the air will be limited through a combination of decontamination and zone restrictions. Within this zone, employees and subcontractors may perform personal decontamination (e.g., face and hand washing), and certain PPE and small equipment decontamination. Buckets or wash basins for boot

washing and equipment decontamination will be stationed on a sheet of plastic (a minimum of 8 feet by 8 feet), the boundaries of which will constitute the CRZ. Support Zone (SZ)

The Support Zone will be considered a non-contaminated area. The location of support facilities in the SZ will be upwind of the EZ (where possible) and readily accessible to the nearest road. The field office/support facilities, equipment vehicles, a first aid station and a visitors/personnel entry and exit log

for the work site will be located in this zone. Potentially contaminated personal clothing, equipment and samples are not permitted in this zone unless properly containerized.

Drill rig, backhoe, etc.

Support Zone

Contamination Reduction Zone

Figure 9-1
Typical Exclusion, Contamination Reduction, and Support Zone setups

9.1.2 Communications

A loud and clear form of communication should be made available for Site personnel entering the work zones. Site communication may be in the form of hand signals, voice, or other communication devices. All forms of communication should be understood by all workers on the Site prior to starting work. Offsite communications may be conducted with mobile phones or walkie-talkies only if the atmosphere has been deemed non-explosive, and the person using the mobile device is in the SZ while placing the call, or inside the cab of a stationary vehicle.

9.1.3 Site Security

The Sparrows Point facility is not open to the public, and there is a strictly monitored main entrance with a security guard on duty at all times who only allows authorized personnel onto the Site. This limited access to the facility should eliminate the need for many requirements for specific site security except those needed to maintain work zone integrity, such as visible barriers around open excavations or EZs and CRZs. No site visitors will be allowed to travel unescorted by EAG or subcontractor personnel around the facility.

Once site visitors arrive at their intended work zone, they must check in with the Field Team Lead. If visitors are authorized to enter the CRZ and/or the EZ, they must have completed OSHA 1910.120 medical surveillance and training requirements (refer to Section 8.0 and Section 6.0). Visitors must wear

appropriate PPE before they will be allowed to enter the CRZ and/or the EZ. They must also be taken through this HASP during a brief tail-gate meeting and sign the Acknowledgement page in the back prior to engaging in any activities inside the CRZ or the EZ. All site visitors must follow the same site control measures and decontamination procedures as EAG personnel and subcontractors. The Project Manager must also be informed of each visitor's name, purpose for their visit, time of entry (and exit), location of tasks they wish to perform, whether they completed their intended task(s), and any other relevant information pertaining to their visit.

9.2 **Decontamination Procedures**

Decontamination of employees, subcontractors, and equipment leaving the EZ will be performed to minimize human exposure to hazardous substances and to minimize the spread of contamination to surrounding areas. The purpose of the CRZ is to provide a location to perform limited personnel decontamination and certain PPE and small equipment decontamination.

9.2.1 Personnel Decontamination

Persons leaving the EZ must pass through the CRZ and follow decontamination procedures before entering the SZ. Hand tools and other sampling equipment used in the EZ and reusable PPE (boots, safety glasses, etc.) will be appropriately cleaned prior to removal from the site each day. The step-by-step sequence for personnel decontamination is as follows:

- Remove boot covers (if used) at the boot washing station and place them in the disposal container provided
- Wash outer gloves and chemical resistant boots (if used) at the boot washing station
- Remove wrist tape (if used) and outer gloves and place them in the disposal container provided
- Remove ankle tape (if used) and disposable coveralls (if used) and place them in the disposal container provided
- Remove respirators (if used) and place each in designated locations in the CRZ
- Remove inner gloves and discard in the disposal container provided
- Wash hands and face and proceed to the SZ

Respirators must be fully decontaminated after each use by the personnel who previously wore them. All project employees and subcontractors are required to take a thorough soap and water shower in their home or motel room at the end of each workday. If monitoring or a general exposure assessment indicates that an employee has become contaminated, the employee or subcontractor will notify the EAG Project Manager and the Field Team Lead as soon as the contaminated state has been discovered.

9.2.2 Equipment Decontamination

All equipment leaving the EZ must be decontaminated either within the CRZ or at the central decontamination area. Small equipment, such as hand tools, will be thoroughly decontaminated within the CRZ before being placed in the SZ. The field tools may be scrubbed visually clean using a detergent solution (Alconox/Liquinox) with water and a stiff, long-bristled scrub brush. Following the solution scrubbing, the tools may be rinsed with distilled water or isopropyl alcohol. Any vehicle working in an EZ will be decontaminated before leaving the site. The vehicle will be cleaned by sweeping excess soil and debris off the wheels. A high-pressure sprayer will then be used to wash the wheels, if necessary.

Each piece of equipment will be inspected after cleaning for any soil remaining on the tires or elsewhere. All vehicles will be cleaned to the satisfaction of the Field Team Lead or a designated assistant prior to entering the SZ or leaving the site. Employees or subcontractors performing decontamination shall wear the appropriate level of PPE (refer to Section 5.0).

9.2.3 Waste Management

The Project Manager and the Field Team Leads will be responsible for overseeing the containerization and disposal of any field derived wastes. Contaminated or suspected contaminated field derived wastes shall be disposed of in accordance with all local, state, and/or federal regulations. Field derived wastes include decontamination rinse waters and other related decontamination generated wastes.

Soils and groundwater expected to be encountered during any sampling or intrusive work not to be contaminated, based on existing data, may be discharged to the ground surface in the immediate vicinity of the monitoring well. However, any known or suspected to be contaminated soil (in small quantities) or groundwater will be containerized for future removal, likely in 55-gallon drums or other approved storage vessels. Depending on the suspected contaminants, the recovered groundwater may be sent through one of the onsite groundwater treatment units. However, the treatment unit must be designed to address the contaminants of concern in the groundwater being treated. Otherwise, the liquid must be staged onsite for eventual offsite disposal at an approved facility.

Impacted soil, if in drums, will be staged in an area designated by the Project Manager or Field Team Lead for eventual disposal. For large excavations, where excavated soil is stockpiled, it may be necessary to place soils on plastic and cover with plastic to prevent any potential leachable runoff. The Project Manager and/or Field Team Lead will provide the proper guidance necessary for handling bulk soil piles.

Any NAPL recovered via remediation systems or manual recovery efforts will be properly containerized and either disposed of offsite as a recyclable material, if possible, or as a hazardous waste. The receiving facility must be an approved facility.

10.0 EMERGENCY RESPONSE AND CONTINGENCY PROCEDURES

The objective of emergency response and contingency procedures is to ensure that effective actions are implemented in a timely manner to minimize or control the effects of adverse events (e.g., potential chemical exposures, personal injuries, fires/explosions, and spills/releases). The following subsections describe the basic emergency responses required should an emergency take place during field investigation or remedial effort activities.

10.1 Emergency Phone Numbers

Emergency telephone numbers are listed in **Table 10-1**.

Table 10-1
Emergency Telephone Numbers and Agencies

Agency	Telephone Number
Security (Sparrows Point facility)	(410) 388-7761
Ambulance	911
Fire	911
Occupational Health Clinic	(410) 633-3600
Hospital	(410) 550-0100 (general)
	(410) 550-0350 (emergency)
National Response Center	(800) 424-8802
Poison Control Center - Maryland	(800) 222-1222
EAG Main Contact	
VP Remediation, Russ Becker	(314) 686-5611
Project Manager, James Calenda	(314) 620-3056

10.2 Injury/Illness Treatment

In the event of illness or injury, the following steps will be taken:

- Evaluate the extent of injuries or seriousness of illness.
- When employees require urgent medical attention, call for emergency assistance. First aid should be administered while awaiting an ambulance or paramedics. All emergency medical treatment, other than first aid, will be administered by the local paramedics. Table 10-1 lists site emergency telephone numbers. In all cases, critical injuries must be immediately referred for professional medical attention.
- For a non-critical injury/illness, first aid will be administered by onsite personnel. Anyone
 sustaining a non-critical injury/illness who continues to work will be monitored by the Field
 Team Lead for any signs of worsening condition, if it is deemed that the person can return to
 work by the Team Lead and Project Manager. Injured personnel who later suffer any worsening
 change in status are to immediately notify the Team Lead or the Project Manager.

10.3 Occupational Health Clinic and Hospital Information

Occupational Health Clinic

The Concentra Medical Center, located at 1833 Portal Street, Baltimore, MD, is the closest occupational health clinic, just over 6 miles away. A map to the clinic in included as **Figure 10-1**. The clinic should be used for non-emergency injuries and illnesses.

Directions:

From Sparrow's Point Road, turn left onto Wharf Road; Turn left onto MD-158 W/Bethlehem Blvd. (0.4 mile); Turn right onto MD-157 N/Peninsula Expy. (2.7 miles); Turn slight left onto Merritt Ave. (0.1 mile); Merritt Ave. becomes Sollers Point Rd. (0.3 mile); Turn left to stay on Sollers Point Rd (0.6 mile); Turn left onto Williams Ave. (0.2 mile); Turn right onto Dundalk Ave. (<0.1 miles); Turn left onto Chandlery St. (0.1 mile); Turn left onto Portal St.

Cedar Beach **North Point Village** Broening Hwy Back River Rocky **Evergreen Park** Point Golf Dundalk Course Patapsco Dundalk River Marine (157) Edgemere Terminal Bear Sparrows Point North Industrial Point Curtis 695 Complex State Bay Park Old Road Bay © 2007 MapQuest, Inc. ©2007 NAVTEQ

Figure 10-1: Health Clinic (Non-Emergency) Map

Hospital

The Johns Hopkins Bayview Hospital is the closest emergency facility, just over 9 miles away. The hospital is located at 4940 Eastern Avenue in Baltimore, MD. **Figure 10-2** is a map to this hospital. Maps are also included in **Attachment E**.

Directions:

From the Sparrows Point Industrial Complex, go north on Route 151 for approximately one mile. Take ramp (right) onto I-695 towards I-695/Essex.

At exit 40, take ramp (right) onto Route 151/North Point Boulevard North/MD 150;

Take ramp (right) onto Route 150 (Eastern Avenue).

Continue on Eastern Avenue to hospital on right.

Montebello Belmar Overlea MapPoint 25 Hampden Bowleys 147 Quarters MAR D Rossville 542 45 Gardenville Middle River Waverly 150 Rosedale illage Sinclair Lin 40 129 BALTIMORE E Federal St **Bolton Hill** Essex Mount BALTIMORE CITY Orangeville End Vernon 151 Baltimore Eastern Ave 150 Little Italy 20 **Odonell Heights** Canton South Fells Wise Ave Essex Baltimore Point Skypark Colgate Port Mount 151 Covington Winans Dundalk Cherry Hill 295 157 Start Baltimore Fairfield 648 Highlands Brooklyn Sparrows Brooklyn Manor Wagners Point Chesapeake Point Industrial Pumphrey Curtis Bay **North Point** Complex State Park Arundel Cove ANNE ARUNDEL Curtis 2 (10) Bay Gsa Depot Ferndale ©2003 Microsoft Corp ©2003 NavTech, and Jor GDT, Inc. (173)

Figure 10-2: Hospital Map

Prior to the start of field activities, the Project Field Team Leader will call to verify the telephone numbers and directions for the clinic and hospital, and then distribute location maps and the emergency telephone list to workers and vehicles.

10.4 Accident and Emergency Medical Response

All field team members will be aware of the location of a first aid kit kept onsite. All vehicles used to transport injured persons to an offsite medical facility will be provided with directions and a map to the medical facility.

If treatment beyond first aid is required, emergency response personnel will be contacted for assistance and transport. Before beginning site activities, the Project Field Team Leader will ensure that each field team member knows where the nearest emergency medical facilities are and how to get there. The closest hospital will be used in cases of life-threatening emergencies at the direction of the Project Field Team Leader. The telephone numbers of the local emergency services will be available in the SZ, and the Project Field Team Leader will brief the field team on the procedures for calling for help in an emergency.

Site personnel will inform the Project Manager of any medications, allergies, or other medical information that may be applicable for their medical treatment. The Project Manager will supply this information to emergency response personnel, and will accompany the victim to the hospital, if possible.

10.4.1 Chemical Exposure

In case of accidental overexposure to a hazardous material (groundwater, soil, and/or off-gas materials), guidelines shown in **Table 10-2** will be used.

Table 10-2
Chemical Exposure Guidelines

Type of Overexposure	First Aid Guidelines	
Skin Contact	Skin: Wash/rinse the affected area thoroughly with copious amounts of soap and water.	
	Eyes: Eyes should be rinsed for at least 15 minutes following chemical contamination.	
	Contact emergency response personnel if required, or transport victim to the hospital.	
Inhalation	Move the victim to fresh air.	
	Contact emergency response personnel if required, or transport victim to the hospital.	
Ingestion	Contact Poison Control Center.	
	Contact emergency response personnel, or transport victim to the hospital.	

10.4.2 Decontamination During a Medical Emergency

For minor medical problems or injuries, regular decontamination procedures will be followed. If emergency, life-saving first aid and/or medical treatment are required, regular decontamination procedures may need to be abbreviated or omitted:

- Do not attempt to wash or rinse an unresponsive victim unless the victim has been contaminated with an extremely toxic or corrosive chemical that may cause injury or loss of life to emergency response personnel.
- Outer garments can be removed if it does not cause a delay, interfere with treatment, or aggravate the problem.

- PPE can be cut away and respiratory protective equipment must always be removed.
- If contaminated clothing cannot be safely removed, then the victim should be wrapped in a blanket or plastic sheeting to prevent contamination to the inside of the ambulance and/or emergency response personnel.

The Project Manager or Field Team Lead will advise the medical staff as to the type of contamination possibly involved.

10.4.3 Small or Incipient Fire

A small fire is defined as a fire that can be extinguished with an available 20 pound type ABC fire extinguisher. An incipient fire is a fire that is small because it has just started. In the event of a small or incipient fire, the following minimum actions will be taken:

- Evacuate nearby personnel from the area, if possible, to an upwind location or to an area not affected by smoke or hazardous decomposition products if an upwind location is not feasible.
- Attempt to extinguish fire using portable fire extinguisher or by smothering.
- Contact emergency response personnel, as needed, for any injuries or exposures to hazardous decomposition products, or if fire cannot be put out.
- After the fire has been extinguished, or emergency response personnel have been contacted, notify the following project personnel:

The Project Manager

10.4.4 Large Fire or Explosion

An explosion, large fire or a small fire which cannot be extinguished is beyond the first line capabilities of EAG personnel. Professional emergency response personnel would be needed to provide emergency assistance for these types of incidents. In the event of a large fire, explosion or a small fire that cannot be extinguished, the following minimum actions will be taken:

- Evacuate all personnel from the site, if possible, to an upwind location, or to an area not affected by smoke or hazardous decomposition products if an upwind location is not feasible
- Perform a quick role call to account for all site personnel
- Contact the fire department
- Contact emergency response personnel, as needed, for any injuries or exposures to hazardous decomposition products
- After emergency response personnel have been contacted, notify the following project personnel:

The Project Manager

10.4.5 Adverse Weather Conditions

In the event of adverse weather conditions, the Project Manager will determine if work can continue without sacrificing the health and safety of site personnel. Threatening weather conditions will be monitored by the Project Manager and possibly the Team Lead via radio, television, internet, and/ or calls to the National Weather Service. Some of the conditions to be considered include:

- Potential for heat or cold stress
- Limited visibility

- Electrical storms
- Treacherous weather-related working conditions (i.e., heavy rainfall, icy conditions causing slippery footing hazards, etc.).

10.4.6 First Aid for Heat Stress/Cold Stress

First aid treatment for <u>heat cramps</u> includes shade, rest and fluid replacement. If available, the individual should drink electrolyte replacement fluids (e.g., Gatorade, Squincher or 10-K). The individual should recover within half an hour.

First aid treatment for <u>heat exhaustion</u> includes cooling the victim, elevating the feet and fluid replacement. If the individual has not recovered within half an hour, then transport the victim to the hospital for medical attention.

<u>Heat stroke</u> is a medical emergency, requiring the immediate cooling of the victim and transport to the hospital for medical treatment immediately.

First aid treatment for <u>frost nip</u> and <u>frostbite</u> includes covering the affected area with warmth and retreating to a warm area. If the individual has not recovered within half an hour, then transport the victim to the hospital for medical attention.

<u>Frozen tissue</u> is a medical emergency and the victim must receive medical attention immediately. Contact emergency response personnel immediately or transport the victim to the hospital.

First aid treatment of <u>mild hypothermia</u> includes using heat to raise the individual's body temperature. Heat may be applied to the victim in the form of heat packs, hot water bottles and blankets. If the individual has not recovered within half an hour, then transport the victim to the hospital for medical attention.

<u>Severe hypothermia</u> is a medical emergency and the victim must be transported to the hospital immediately. First aid treatment for severe hypothermia includes handling the victim very gently; rough handling may set off of an irregular heartbeat. **DO NOT** attempt to re-warm the severely hypothermic victim; re-warming may cause the development of an irregular heartbeat.

10.4.7 Snake Bites

If bitten, lower the extremity below the heart to reduce the poison's dissemination through the body. Remain calm, try to keep the heart rate reduced and seek medical attention immediately. Do not cut the wound or attempt to suck out the venom. Note any physical features (e.g., shape of head and color or pattern on body) of the snake.

10.4.8 Animal Bites

All bites should be treated as contaminated soft tissue injuries. Bites should be washed immediately with large amounts of soap and water. If soap is not available, flush the wound with water. The severity and onset of any infection is dependent upon the number of organisms (viruses or bacteria) introduced into the wound. Washing saliva out of the wound immediately will reduce the number of bacteria or viruses that can enter the tissue. Medical attention must be sought if rabies is suspected or the individual has not had a recent tetanus booster.

10.4.9 Insect Bites and Stings

Emergency care for insect bites and stings depends on the individual's reaction. To treat a sting that results in a minor reaction, remove the stinger by gently scraping it off the skin. Do not try to grasp the sac or stinger, because this forces the remaining venom into the skin. Once the stinger has been removed, clean the wound and surrounding area. Apply cold packs to slow the absorption of the venom and reduce pain and swelling. The treatment for a severe reaction to insect stings includes the following:

- Confirm with the victim whether they are highly allergic to the insect that stung them
 - o If victim has gone into anaphylactic shock, retrieve their epi pen or other auto-injector and administer per the directions as hastily as possible
- Assuming the victim remains conscious, ask them to refrain from moving around, and to lie down
- Immobilize the injured area immediately
- If an extremity is involved, remove any rings or watch
- Keep the affected part low, below the level of the heart
- Apply cold compresses to the affected area
- If possible, try to identify the type of insect that inflicted the sting
- Transport the victim to a medical facility immediately, continuing supportive measures en route.

All employees and subcontractors must report severe reactions to insect stings prior to the beginning of work to both the Project Manager and Field Team Lead.

10.4.10 Poisonous Plants

Decontamination: Wash the skin immediately after contact with the plant. Proper washing may not be practical in the middle of the woods, but a product such as Technu or a small wash-up kit with prepackaged, alcohol-based cleansing tissues can be effective. Employees and subcontractors should not forget to wash contaminated clothing and clean up contaminated equipment prior to re-use.

Treatment: Options are as follows:

- Home treatment: Calamine lotion and an oatmeal bath (one cup to a tub full of water) can help relieve itching. To prevent secondary skin infection, scratching is not helpful and the fingernails should be cut to avoid damage to the skin. Over-the-counter hydrocortisone cream can decrease inflammation and itching; however, the label should be read and the cream used according to directions.
- When to see the doctor: Severe cases may require further treatment. A physician should be seen if the rash appears infected, is on the face or other sensitive body areas, or is too extensive to be easily treated at home.

10.4.11 Ticks

To remove an attached tick:

- Use fine-tipped tweezers or a "tick tool" to grasp the tick at the surface of the skin
- If tweezers are not available, use a tissue to protect the fingers (exposure to the tick's body fluid may lead to transmission of disease)
- With a steady motion, pull the tick straight out

Disinfect the bite site and the tweezers. Wash your hands thoroughly with soap and water. Save the tick if you can by placing it in a Ziploc bag in the freezer; this may help with diagnosis in the future.

If flu-like symptoms such as fatigue, headache, neck-stiffness or jaw discomfort begin following a tick bite, seek medical attention.

APPENDICES



Environmental Engineers

ATTACHMENT A COMPLIANCE AGREEMENT

EAG HEALTH AND SAFETY PLAN

ACKNOWLEDGEMENT FORM

l,, have read (or	had read to me), EAG's health and safety plan.
(Print Name)	
I understand my responsibilities as they are defined in t	this plan and will abide by these rules and
procedures, as well as any regulations or otherwise gov	verning safety. When in doubt concerning safe
job performance, I will speak to my immediate supervis	sor and/or Project Manager.
I understand EAG reserves the right to change or amen	d the HASP at any time.
I understand any violation to the plan policies or proced and including termination.	dures will be cause for disciplinary action up to
Employee Signature	 Date
Employee Signature	Date
EAG Supervisor/Project Manager Signature	Date

ATTACHMENT B

Material Safety Data Sheets (MSDSs)

APPENDIX J

<u>Sparrows Point Development - PPE Standard</u> <u>Operational Procedure, Revision 3</u>

Planning, Tracking/Supervision, Enforcement, and Documentation

Planning

- Response and Development Work Plan (RDWP) for each individual redevelopment subparcel identifies and documents site conditions.
- RDWP is reviewed and approved by regulators.
- Contractor HASP to address site-specific conditions and PPE requirements:
 - Contractor H&S professional to sign-off on PPE requirements for site workers;
 - Job Safety Analysis (JSA) to be performed for ground intrusive work.
- Project Environmental Professional (EP) assigned to each construction project –
 monitors project during environmentally sensitive project phases and is available to
 construction contractor on an as needed basis. EP responsibilities include the following:
 - Dust monitoring
 - Routine ground intrusive breathing space air monitoring
 - Soil tracking
 - Water handling oversight
 - Ground intrusive work observation
 - Notification for unexpected conditions
- Pre-construction meeting identifies EP roles and responsibilities and reviews site conditions.
- Contractor to perform job-site HazCom. HazCom to be addressed in Contractor HASP and include:
 - o PPE requirements,
 - Exposure time limits,
 - Identification of chemicals of concern and potential effects of over-exposure (adverse reactions),
 - Methods and routes of potential exposure.
- All personnel that will be performing ground intrusive work within impacted soils shall sign-off on HazCom.
- If, based on a thorough review of Site conditions, it is expected that construction workers
 will have the potential to encounter materials considered hazardous waste under RCRA
 or DOT regulations, HAZWOPER-trained personnel will be utilized.

Tracking/Supervision

- Contractor to record any day that there is ground intrusive work and confirm that proper PPE is being worn.
- EP will note ground intrusive work on daily work sheets and perform at least one spot check per day.
- EP will log on daily work sheets PPE compliance for all intrusive work areas at least once per day.

• EP to take example photos of Exclusion Zones/Contamination Reduction Zones periodically.

Work Zones Delineation

- Exclusion Zone The Exclusion Zones will include the areas proposed for excavation or with active trenches, excavations, or ground intrusive work, at a minimum. Personnel working within the exclusion zone will be required to wear Modified Level D PPE as described in this SOP. EP to take example photos of Exclusion Zones/Contamination Reduction Zones periodically. The Exclusion Zones will be identified each work day.
- Contamination Reduction Zone This work zone is located outside of the exclusion zone, but inside of the limits of development (LOD). The Contamination Reduction Zone will be located adjacent to the Exclusion Zone, and all personal decontamination including removal of all disposable PPE/removal of soil from boots will be completed in the Contamination Reduction Zone.

Documentation

- Contractor HASP and HazCom.
- Contractor ground intrusive tracking record.
- HASP and HazCom sign-in sheets.
- EP pre-con memos.
- EP daily work sheets.
- Records documenting intrusive work and proper PPE use to be provided in completion report.

Enforcement

 Non-compliance of PPE requirements will result in disciplinary action up to and including prohibition from working on Sparrows Point.

Unknown and/or Unexpected Conditions

If unknown and/or unexpected conditions are encountered during the project that the EP determines to have a reasonable potential to significantly impact construction worker health and safety, the following will be initiated:

- 1. Job stoppage,
- 2. TPA and MDE notification.
- 3. Re-assessment of conditions.

Work will not continue until EP has cleared the area. If hazardous waste is identified, a HAZWOPER contractor will be brought in to address. The approved contingency plan will be implemented, where appropriate.

Modified Level D PPE

Modified Level D PPE will include, at a minimum, overalls such as polyethylene-coated Tyvek or clean washable cloth overalls, latex (or similar) disposable gloves (when working in wet/chemical surroundings) or work gloves, steel-toe/steel-shank high ankle work boots with taped chemical-protective over-boots (as necessary), dust mask, hard hat, safety glasses with

side shields, and hearing protection (as necessary). If chemical-protective over-boots create increased slip/trip/fall hazardous, then standard leather or rubber work boots could be used, but visible soils from the sides and bottoms of the boots must be removed upon exiting the Exclusion Zone.

SP Development PPE Procedure 4-3-19